




GENERAL NOTES


- A. ALL NEW WIRING SHALL BE CONCEALED WHERE POSSIBLE. UTILIZE CRAWLSPACE AND/OR ACCESSIBLE CEILING SPACE TO RUN NEW WIRING AS REQUIRED AND FISH INTO WALLS/MILLWORK.
- B. WHERE EXISTING WALLS ARE TO BE OPENED FOR INSTALLATION OF NEW WIRING, COORDINATE WITH GENERAL CONTRACTOR ROUTING OF SAME. ARRANGE AND PAY FOR ALL CUTTING/REPAIR/PATCHING AS REQUIRED.
- C. WHERE BRANCH CIRCUIT BREAKERS ARE REMOVED, PROVIDE FILLER PLATES FOR BREAKER SPACES.
- D. CIRCUIT BREAKERS SHALL MATCH EXISTING. CONFIRM SHORT CIRCUIT RATING AND TYPE ON SITE, PRIOR TO FINALIZING PRICING.
- E. UTILIZE SPARE/FREED UP CIRCUITS FROM DEMOLITION AS REQUIRED TO ACCOMMODATE THE ADDITIONAL CIRCUITING REQUIREMENTS IN THE RENOVATION.
- F. PROVIDE NEW TYPEWRITTEN PANEL DIRECTORIES TO ACCOMMODATE UPDATED CIRCUITING. NEW BREAKERS IN DISTRIBUTION PANELS SHALL BE LABELLED USING LAMACOIDS.
- G. RELOCATE EXISTING LIGHT SWITCHES AS REQUIRED TO ACCOMMODATE NEW DOOR CONFIGURATIONS.
- H. ALL EXISTING LUMINAIRES BEING RETROFITTED WITH NEW LAMPS AND BALLASTS SHALL HAVE THE LENSES AND THE INTERIOR OF THE LUMINAIRE CLEANED. BROKEN OR YELLOWED LENSES SHALL BE REPLACED.
- I. WHERE NEW TOGGLE SWITCHES, OR DIMMER CONTROLS ARE ADJACENT EACH OTHER, PROVIDE GANGED SWITCHING TO ACCOMMODATE TOTAL NUMBER OF SWITCHES, UNLESS NOTED OTHERWISE.
- J. ALL RECESSED LIGHTING FIXTURES IN LAY-IN CEILINGS SHALL BE INSTALLED WITH 6' LONG FLEXIBLE METAL CONDUIT.
- K. ALL MOUNTING HEIGHTS FOR LUMINAIRES ARE TO THE BOTTOM OF THE LUMINAIRE UNLESS NOTED OTHERWISE.
- L. REFER TO ARCHITECTURAL ELEVATIONS FOR MOUNTING HEIGHTS OF EXTERIOR OR INTERIOR LUMINAIRES.
- M. EXIT SIGNS THIS DRAWING/AREA SHALL BE TYPE XXX UNLESS NOTED OTHERWISE.
- N. EXIT SIGNS THIS DRAWING/AREA SHALL BE FED FROM CIRCUIT X-XXX UNLESS NOTED OTHERWISE.
- O. EXIT SIGNS THIS DRAWING/AREA SHALL BE FED FROM BATTERY UNIT 'X-XX' UNLESS NOTED OTHERWISE.
- P. EMERGENCY LIGHTING DOUBLE REMOTE HEADS THIS DRAWING/AREA SHALL BE FED FROM BATTERY UNIT 'X-XX' UNLESS NOTED OTHERWISE.
- Q. EMERGENCY LIGHTING DOUBLE REMOTE HEADS THIS DRAWING/AREA SHALL BE FED FROM BATTERY UNIT 'X-XX' UNLESS NOTED OTHERWISE.
- R. FINAL CONNECTION TO ALL MECHANICAL EQUIPMENT SHALL BE FLEXIBLE. CONFIRM FINAL CIRCUIT BREAKER AND WIRE SIZE WITH MECHANICAL EQUIPMENT SHOP DRAWINGS. ADJUST CIRCUIT BREAKER AND WIRE SIZE AS REQUIRED WITHOUT ADDITIONAL COST TO OWNER.
- S. ELECTRICAL CONTRACTOR SHALL COORDINATE QUANTITIES AND LOCATIONS OF ALL SWITCHES AND VALVES REQUIRING WIRING WITH SPRINKLER CONTRACTOR.
- T. PROVIDE RE-VERIFICATION OF FIRE ALARM SYSTEM FOR ALL NEW AND MODIFIED DEVICES.

KEY NOTES


- 1 DATA CABINETS TO REMAIN
- 2 RELOCATE EXISTING PA SPEAKER COMPLETE WITH ALL ASSOCIATED ELEMENTS
- 3 REINSTALL EXISTING PA SPEAKER AND ALL ASSOCIATED ELEMENTS. EXTEND CONDUIT AND NEW WIRE AS NECESSARY
- 4 RELOCATE EXISTING HEAT DETECTOR TO NEW CEILING
- 5 EXISTING BASEBOARD HEATER AND THERMOSTAT TO REMAIN
- 6 PANEL 'BE' LOCATED IN BASEMENT ELECTRICAL ROOM
- 7 WIRE AND CONNECT TO EXISTING LIGHTING CIRCUIT.

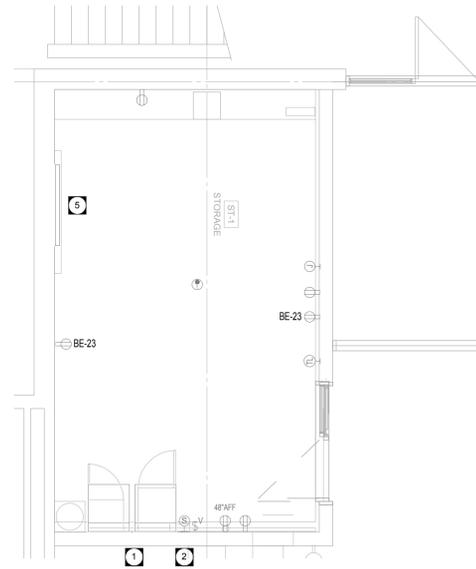


1 POWER DEMOLITION - ZONE 4
 E2.3 SCALE: 1 : 50

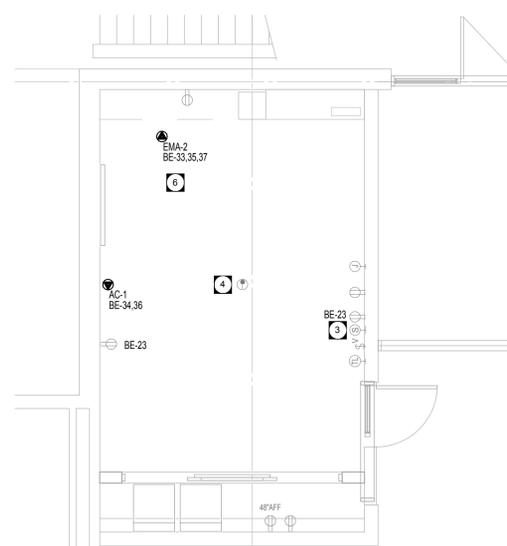

2 POWER RENOVATION - ZONE 4
 E2.3 SCALE: 1 : 50

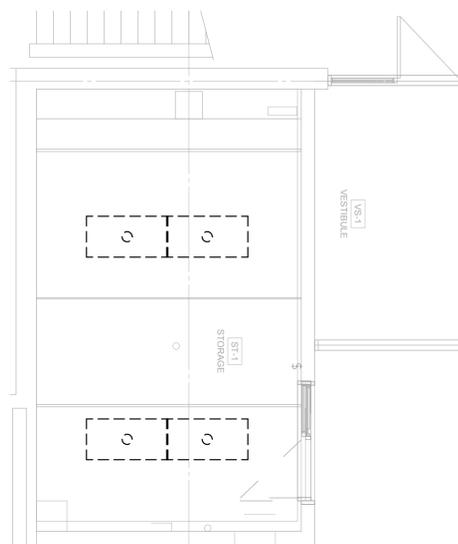

3 LIGHTING DEMOLITION - ZONE 4
 E2.3 SCALE: 1 : 50

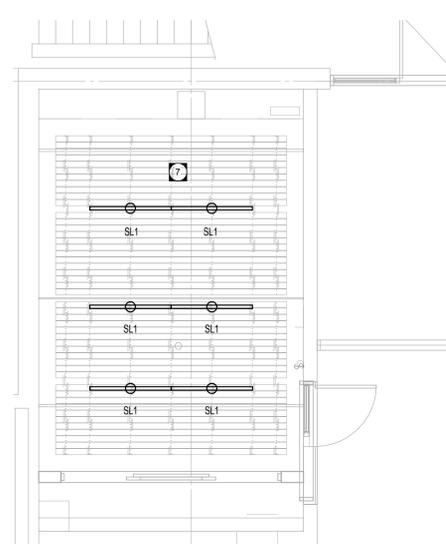

4 LIGHTING RENOVATION - ZONE 4
 E2.3 SCALE: 1 : 50

O 16-02-29 Issued for Construction

No. DATE: REVISION / ISSUANCE

Seal

Architect



Engineer

epp siepman engineering inc.
 mechanical & electrical engineers
 303-100 Osborne St. South p. 204.453.1080
 Winnipeg, MB ese@eppsiepman.com
 RSL 1YG

Project: BID OPPORTUNITY 1034-2015

PAN AM POOL INTERIOR RENOVATION

25 POSEIDON BAY

Sheet Title

ELECTRICAL LAYOUTS ZONE 4 - SPECIAL EVENTS ROOM

Project No. 15087

Date: FEB 29 2016

E2.3