


LOCATION PLAN

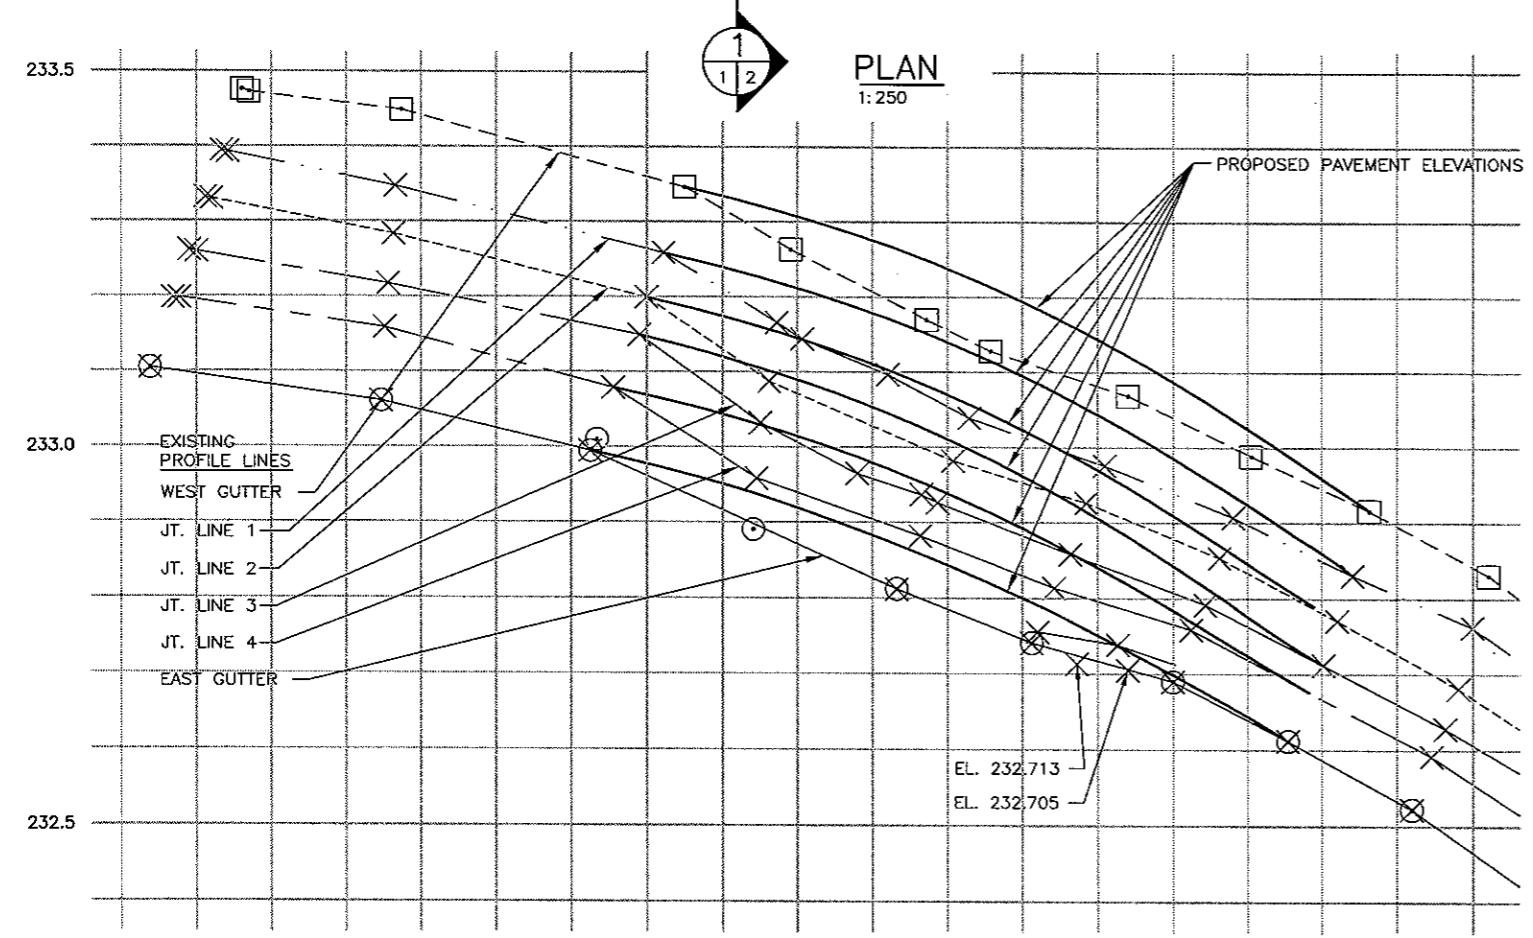

PROFILE
HORIZ 1:250
VERT 1:10

| TEST HOLE (TH) | |
|----------------|----------------|
| NO. | DEPTH (NOTE 2) |
| 1 | 58 |
| 2 | 104 |
| 3 | 35 |
| 4 | 107 |
| 5 | 51 |
| 6 | 90 |
| 7 | 50 |
| 8 | 94 |
| 9 | 23 |

- NOTES:
- THE EXISTING PAVING STONE SIDEWALK IS LOCATED OVER A 100± THICK CONCRETE SLAB. LIFT THE SIDEWALK SLAB AS REQUIRED TO MATCH THE ELEVATION OF THE ADJACENT PAVEMENT SLABS.
 - DEPTH IS THE DEPTH OF THE VOID MEASURED IN APRIL 2004.
 - THE APPROACH SLAB IS 250mm THICK AND IS REINFORCED TOP AND BTM. AT 300 O/C. AVOID CUTTING REINFORCING STEEL WHEN INSTALLING INJECTION HOLES. OTHER PAVEMENT SLABS ARE UNREINFORCED

B.M.
NORTH EAST CORNER OF MAIN ST.
BRIDGE NORTH ABUTMENT ROOF.

| LEGION | |
|---------|------------------------------|
| 000.000 | PROPOSED PAVEMENT ELEVATIONS |
| 000.000 | EXISTING ELEVATION |

| | | |
|--------------------|---------------------------------|--|
| B.M. ELEV. 232.994 | DESIGNED BY: R.A.W. | |
| | DRAWN BY: K.C. | |
| | CHECKED BY: R.A.W. | |
| | APPROVED BY: R.A.W. | |
| | SCALE: HORIZ. AS SHOWN VERT. | |
| | DATE: 04/05/06 | ENGINEER'S SEAL |
| | AUTHORIZED BY: | CONSULTANT PROJECT NO. 04-2937-2000 |
| | CITY BRIDGE ENGINEER | |

THE CITY OF WINNIPEG
 PUBLIC WORKS DEPARTMENT
 2004 BRIDGE MAINTENANCE
 MAIN ST. BRIDGE
 APPROACH PAVEMENTS SLAB JACKING
 PLAN AND PROFILE

CITY DRAWING NUMBER
 B104-04-01
 SHEET 1 OF 2