


SECTION THRU WADING POOL

SCALE: NOT TO SCALE

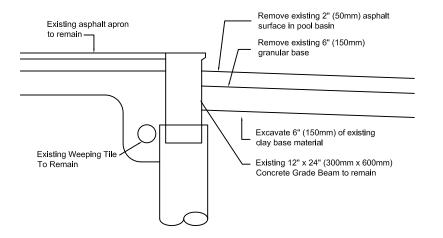

DEMOLTION SECTION DETAIL

SCALE: 3/8" = 1' - 0"

GENERAL NOTES:

- 1. All field dimensions shall be checked and verified by the General Contractor prior to starting construction.
- 2. General Contractor shall confirm the location of all subgrade services prior to starting any excavation.
- Excavate all topsoil, loose or swelling soils under to the new construction to the Contract Administrator's satisfaction.
- Excavate soil below all new concrete surfaces and replace with a minimum 8 inches of compacted granular fill. Granular fill to be compacted to 98% molified proctor describ.
- 5. All construction joint locations shall be approved by the Engineer.

CONCRETE

- 1. All concrete shall be 25 MPa, with 5% air entrainment. Apply a steel trowel finish to all surfaces.
- General Contractor shall order slump, cylinder and air testing for each concrete pour. Cost for concrete testing shall be paid by the City of Winnipeg, Building Services Division.

