



NOTE: EXACT LOCATION OF PEDESTAL TO BE CONFIRMED ON SITE BY WINNIPEG TRANSIT AND CONTRACT ADMINISTRATOR
CONTRACTOR TO COORDINATE WITH LAND OWNERS & WINNIPEG TRANSIT RE: CONDUIT LOCATIONS
GROUND ROD TO BE INSTALLED BY CONTRACTOR
SIZE AND LOCATION TO BE CONFIRMED BY PEDESTAL MANUFACTURER

15 POWER PEDESTAL BASE
L2 N.T.S.

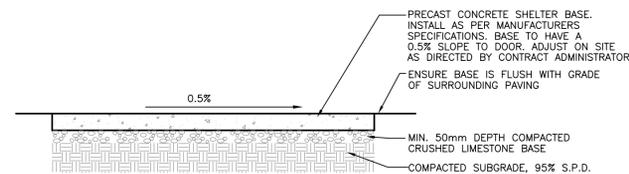


16 PRECAST CONCRETE SHELTER BASE
L5

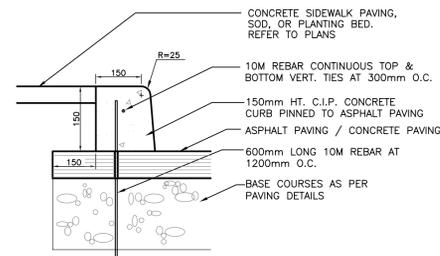

NOTES:
1. PROVIDE EXPANSION JOINTS @ 25' (7.62m) O.C. MAX. AND AT CURVES, TANGENTS, AND CORNERS
2. BASE OF CURB TO REST ON ASPHALT PAVING
3. SACK FINISH EXPOSED SURFACES
4. RUN BARS CONTINUOUS THROUGH EXPANSION JOINTS

17 C.I.P. PINNED CONCRETE CURB
L3

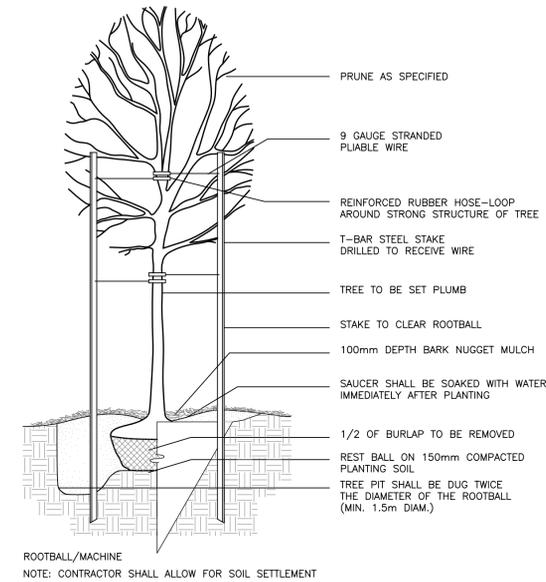

17 TYPICAL DECIDUOUS TREE PLANTING
L3

No.	Revisions	Date	By
Date Scale			
21-02-07		AS NOTED	
Designed By	Drawn By	Checked By	
JW	JW	SR	



Client
WINNIPEG TRANSIT

Project Title
**BUS STOP
UPGRADE PROGRAM
PHASE 2 - SITE WORKS**

Sheet Title
DETAILS

Project No.
06-029

Drawing No.
L8