



**GENERAL SITE DETAIL NOTES:**

- 1) ALL SITE DETAILS AND SITE WORK TO MEET CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS. WHERE DISCREPANCIES OCCUR BETWEEN THE DRAWINGS AND CITY STANDARDS, THE MORE STRINGENT OPTION SHALL BE FOLLOWED.
- 2) SEE ALSO LANDSCAPE DRAWINGS AND SPECIFICATIONS.
- 3) SEE ALSO ELECTRICAL, MECHANICAL & STRUCTURAL DRAWINGS & SPECIFICATIONS.
- 4) SITE VERIFY ALL DIMENSIONS AND LAYOUTS. CONFIRM PLACEMENT OF ANY AND ALL SITE FEATURES PRIOR TO COMMENCING WORK.

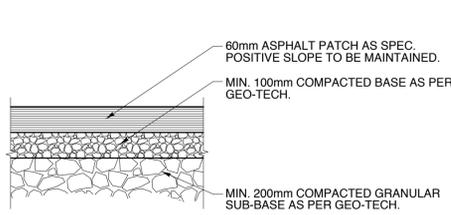

**1 TYPICAL ASPHALT - SECTION**  
SCALE 1:10

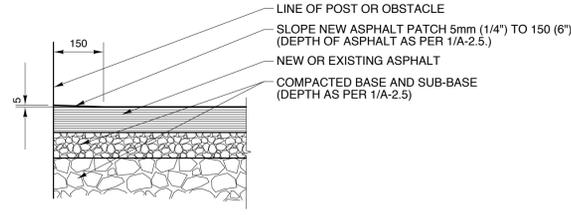


**2 TYPICAL ASPHALT @ OBSTACLES - SECTION**  
SCALE 1:10

- NOTES:**
1. SEE SITE PLAN (1/A-2.3) FOR LOCATION & EXTENT.
  2. ASPHALT PATCHING IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS. SEE CW3410, CW 3250.
  3. ASPHALT, BASE AND SUB-BASE DEPTHS NOTED ARE AS PER GEO-TECH REQUIREMENTS, FOR LIGHT DUTY VEHICLES.


- NOTES:**
1. SEE SITE PLAN (1/A-2.3) FOR LOCATION & EXTENT.
  2. ASPHALT PATCHING IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS. SEE ALSO SD-228C. SEE CW3410, CW 3250.

PARKING SIDE  
TYPICAL FOR PARKING FENCE  
2.337

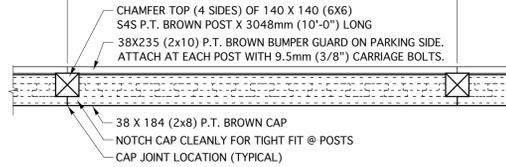

MACHRAY AVE. STREET SIDE

PLAN - TOP VIEW


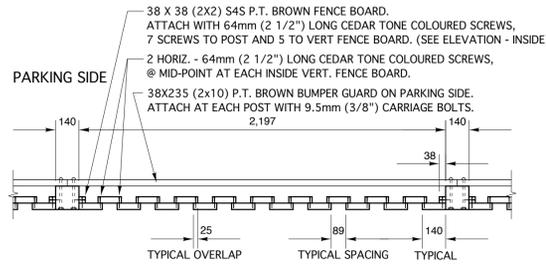


MACHRAY AVE. STREET SIDE

PLAN SECTION THRU VERT. BOARDS & POSTS

**3 LIGHT-PROOF FENCE - PLANS**  
SCALE 1:20

- NOTES:**
1. SEE ALSO ELEVATION DETAIL (4/A-2.5) & SECTION DETAIL (5/A-2.5)

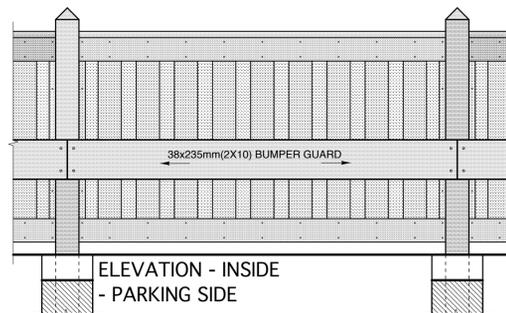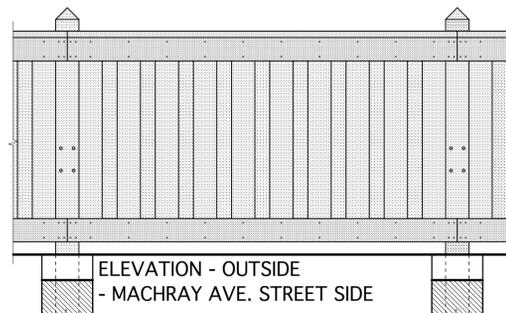


**4 LIGHT-PROOF FENCE - ELEVATIONS**  
SCALE 1:20

- NOTES:**
1. SEE ALSO PLAN DETAIL (3/A-2.5) & SECTION DETAIL (5/A-2.5)



**5 LIGHT-PROOF FENCE - SECTION**  
SCALE 1:10

- NOTES:**
1. SEE ALSO PLAN DETAIL (3/A-2.5) & ELEVATION DETAIL (4/A-2.5)

- GARBAGE ENCLOSURE FENCE NOTES:**
1. SIMILAR CONSTRUCTION AS PER LIGHT-PROOF PARKING FENCE. HEIGHT IS DIFFERENT AS NOTED.
  2. 140X140 (6X6) S4S P.T. BROWN POST X 3658mm (12'-0") LONG NO BUMPER GUARD REQUIRED.
  3. 2 HORIZ. - 64mm (2 1/2") LONG CEDAR TONE COLOURED SCREWS, @ 1/3 & 2/3 HEIGHT AT EACH INSIDE VERT. FENCE BOARD.

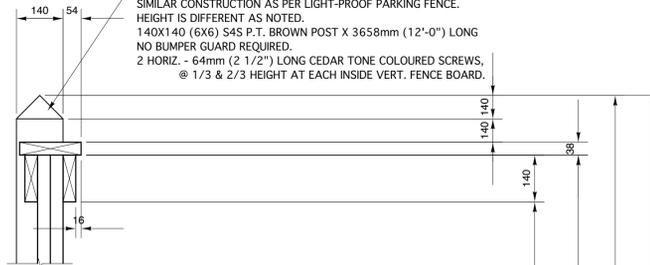


- LIGHT-PROOF PARKING FENCE NOTES:**
1. CHAMFER TOP (4 SIDES) OF 140X140 (6X6) S4S P.T. BROWN POST X 3048mm (10'-0") LONG.
  2. 38X184 (2x8) P.T. BROWN CAP. NOTCH CLEANLY FOR TIGHT FIT @ POSTS.
  3. 38X140 (2x6) P.T. BROWN OUTSIDE TOP RAIL. SCREW TO OUTSIDE FACE OF POSTS WITH 4 - 75mm (3") LONG SCREWS.
  4. 2 HORIZ. - 64mm (2 1/2") LONG CEDAR TONE COLOURED SCREW AT EACH INSIDE AND OUTSIDE VERT. FENCE BOARD.
  5. 64mm (2 1/2") LONG CEDAR TONE COLOURED SCREWS, TOP & BOTTOM AT EACH OUTSIDE VERT. FENCE BOARD.
  6. 64mm (2 1/2") LONG CEDAR TONE COLOURED SCREWS, TOP & BOTTOM AT EACH INSIDE VERT. FENCE BOARD.
  7. 38X140 (2X6) P.T. BROWN FENCE BOARDS. SEE PLAN DETAIL FOR PLACEMENT AND OVERLAP.
  8. 2 HORIZ. - 64mm (2 1/2") LONG CEDAR TONE COLOURED SCREWS, @ MID-POINT AT EACH INSIDE VERT. FENCE BOARD.
  9. 38X235 (2x10) P.T. BROWN BUMPER GUARD ON PARKING SIDE. ATTACH AT EACH POST WITH 9.5mm (3/8") CARRIAGE BOLTS.
  10. SAME SPECIFICATIONS FOR BOTTOM RAILS AS FOR TOP RAILS OF FENCE.
  11. FINISHED GRADE.
  12. 140 X 140 (6X6) S4S P.T. BROWN POST, SET MIN. 1524mm (5'-0") BELOW GRADE.
  13. MIN. 300mm DIA. X 1524mm (5'-0") HOLE. DRY MIX 19mm (3/4) DOWN LIMESTONE WITH PORTLAND CEMENT. 1 BAG CEMENT/HALF YARD OF LIMESTONE. BACKFILL WITH DRY MIX AND COMPACT EVERY 150mm (6"), TO WITHIN 150mm (6") OF FINISHED GRADE.

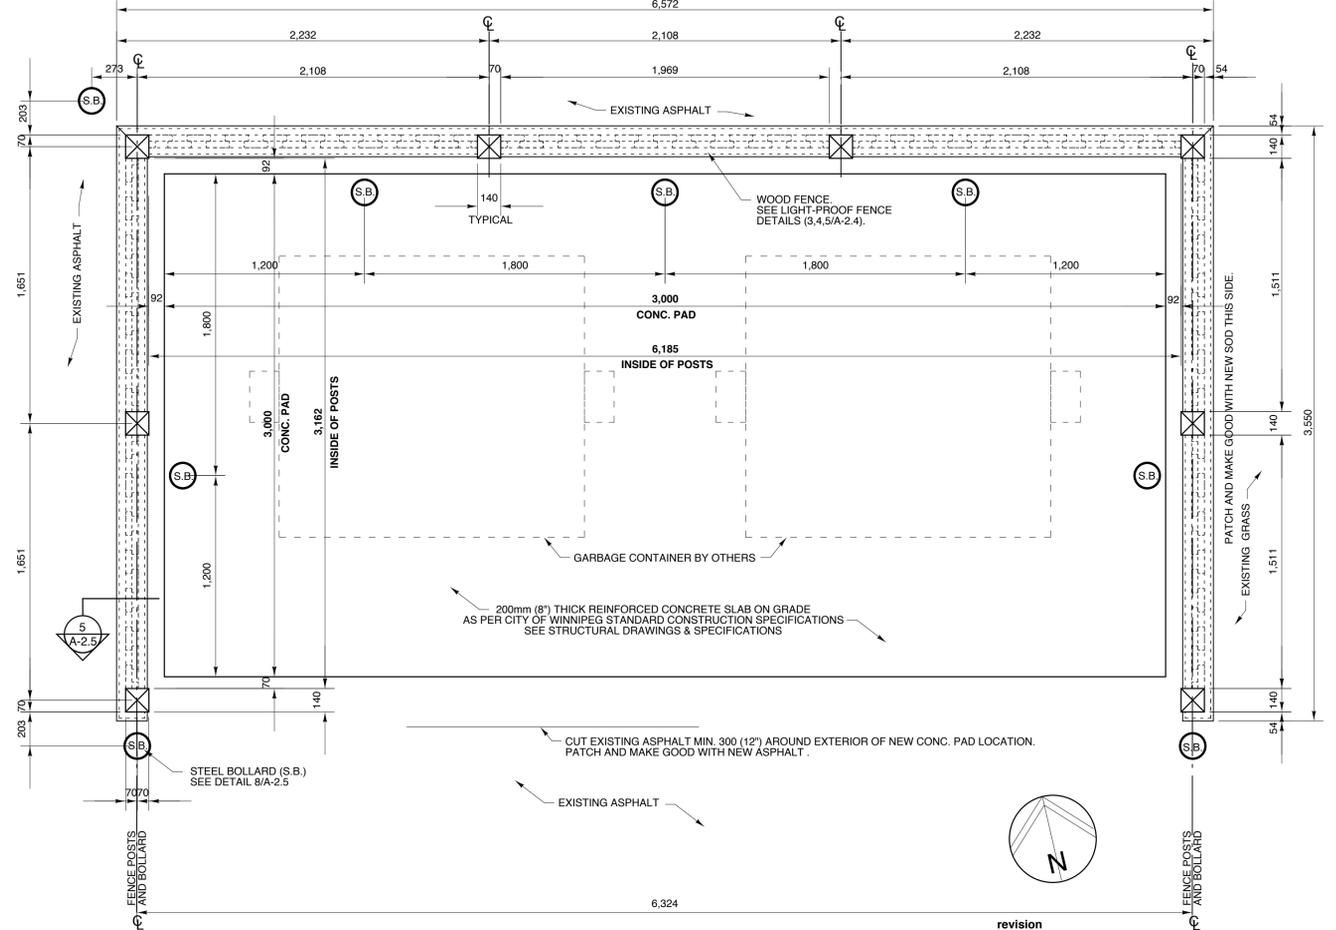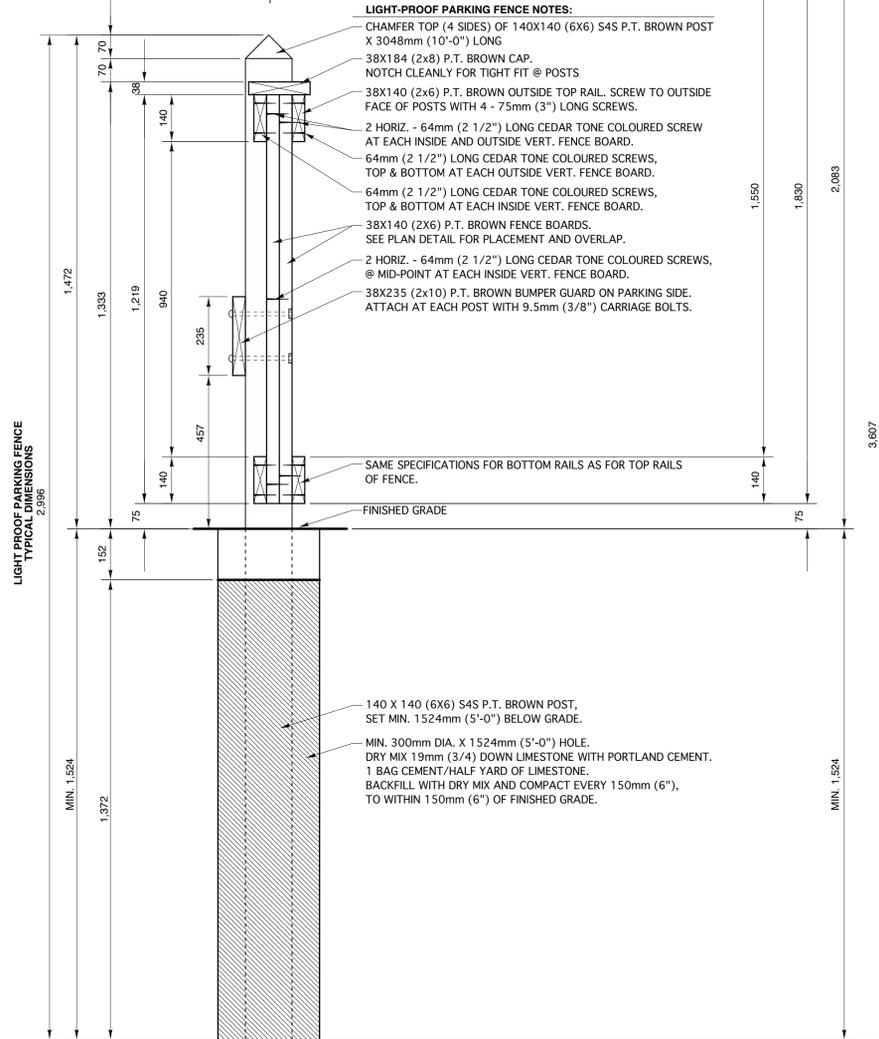


**6 GARBAGE ENCLOSURE - PLAN DETAIL**  
SCALE 1:20

- NOTES:**
1. SEE SITE PLAN (1/A-2.2) FOR LOCATION.
  2. SEE ALSO LIGHT-PROOF FENCE DETAILS (1, 2, 3/A-2.4)

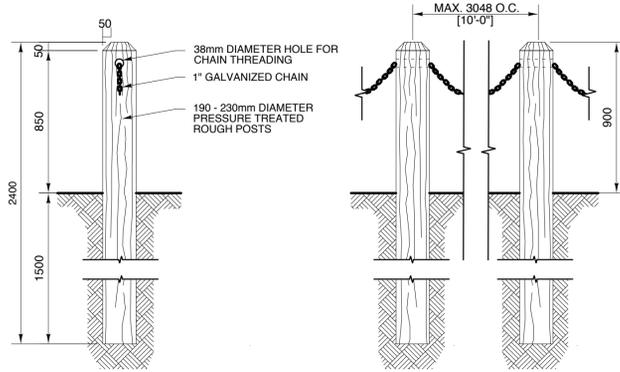

**7 WOOD BOLLARD WITH CHAIN BARRIER DETAILS**  
SCALE 1:20

- NOTES:**
1. POSTS SHALL BE THOROUGHLY TAMPED AND EARTH MOUND APPROX. 100mm FOR FUTURE SETTLING.
  2. SEE SITE PLAN (1/A-2.3) FOR LOCATION OF 25 WOOD BOLLARDS ON TWO SIDES OF OVERFLOW PARKING AREA. EXACT LENGTH AND SPACING TO BE DETERMINED ON-SITE AS PER EXISTING ASPHALT AREA.
  3. PATCH AROUND BOLLARDS WITH NEW SOD AS PER CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS CW 3510

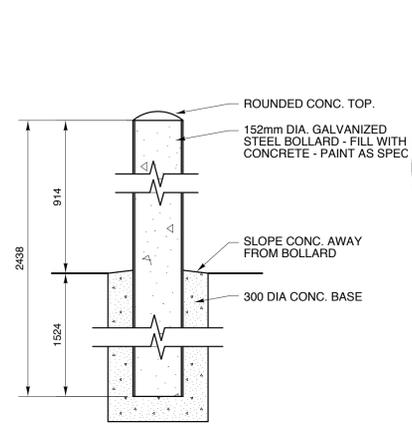

**8 STEEL BOLLARD - SECTION**  
SCALE 1:10

- NOTES:**
1. SEE SITE PLAN (1/A-2.3) FOR LOCATION OF 2 BOLLARDS AT LOADING DOCK, IN ASPHALT.
  2. SEE GARBAGE ENCLOSURE - PLAN DETAIL (6/A-2.5) FOR LOCATION OF 3 BOLLARDS IN ASPHALT AND 5 BOLLARDS IN CONCRETE.
  3. SEE PART SITE PLAN (1/A-2.4) FOR LOCATION OF 3 BOLLARDS.

**revision**

This drawing must not be scaled.

The Contractor must verify all dimensions, datums and levels prior to commencement of work. All errors and omissions must be reported immediately to the Contract Administrator.

Variations and modifications to work shown on this drawing shall not be carried out without written permission from the Contractor Administrator.

This drawing is the exclusive property of the Architect and cannot be reproduced without written permission of the Architect. Reproduction must bear the name of the Architect. Copyright © 2010.



**harold funk architect inc.**

Harold Funk Architect Inc.  
Architecture and Urban Design

401-55 Donald Street, Winnipeg, Manitoba R3C 1L8  
T (204) 943-5087 info@funkarchitect.com  
F (204) 943-9231 funkarchitect.com

**project**

**SINCLAIR PARK COMMUNITY CENTRE**  
Winnipeg, Manitoba

**sheet title**

**SITE DETAILS**

**project number:** 08-011 **drawing number:** A-2.5

**scale:** AS NOTED

**drawn by:** T.E.

**approved by:** H.F.

**date:** 26th FEB. 2010