



SUPPLY AND INSTALL ALL ACCESSORIES BY BOBRICK PRODUCTS AS NOTED BELOW:

GRAB BAR: 36" B-5806 (2 REQUIRED), 24" B-5806 (2 REQUIRED).

TOILET PAPER DISPENSER: DOUBLE ROLL SURFACE MOUNTED, B-2740 (2 REQUIRED)

SANITARY NAPKIN DISPOSAL: SURFACE MOUNTED B-5270 (1 REQUIRED)


SANITARY NAPKIN DISPENSER: EXISTING.


SOAP DISPENSER: SURFACE MOUNTED B-5050 MATRIX SERIES (2 REQUIRED)

PAPER TOWEL DISPENSER: SURFACE MOUNTED, B-5262 MATRIX SERIES (2 REQUIRED)

WASTE RECEPTACLE: SURFACE MOUNTED, B-5277 MATRIX SERIES (2 REQUIRED)

MIRROR: 30" DIAMETER, 1/4" MIRROR SILICONE TO PLYWOOD.
SEE A3. (2 REQUIRED). SILICONE TO BE COMPATIBLE WITH SILVER
BACKING ON MIRROR. PROVIDE SHOP DRAWINGS FOR MIRROR
SUPPORTS.

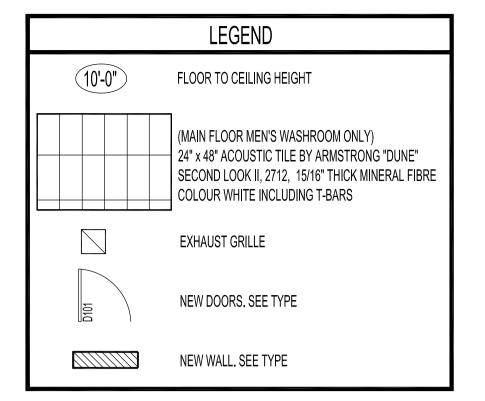

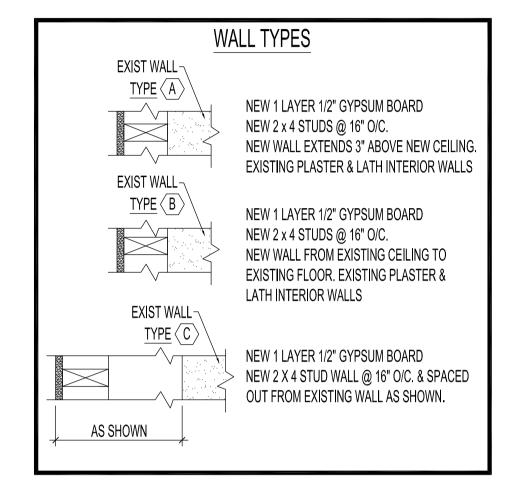

RENOVATION NOTES:

ALL ACCESSORIES, PLUMBING FIXTURES IN BARRIER-FREE WASHROOMS TO BE INSTALLED TO THE LATEST MANITOBA BUILDING CODE STANDARDS FOR BARRIER-FREE ACCESS.

NOTES :

SEE NOTES ON SHEET No. A1

SUPPLY AND INSTALL TWO BARRIER-FREE WASHROOM SIGNS FOR MALE AND FEMALE WASHROOMS.

REPAIR ALL DAMAGED SECTIONS OF EXISTING RAILINGS, MOLDING & CASINGS AS REQUIRED. CONTRACTOR SHALL REPLICATE WOOD RAILINGS, MOLDINGS & CASINGS TO COMPLETE EXISTING & NEW WALL CONSTRUCTION AS REQUIRED.

CONTRACTOR TO PROVIDE WOOD BLOCKING FOR LAVATORY & WASHROOM ACCESSORIES.

1 LEVEL, PLUMB AND PREPARE EXISTING DOOR FRAMES TO SUIT NEW DOORS. PATCH DOOR FRAMES AND WALLS AS REQUIRED. SUPPLY AND INSTALL NEW DOOR STOPS, CASINGS & MOLDINGS TO COMPLETE DOOR INSTALLATION. FINISH AS PER ROOM SCHEDULE. SEE RENOVATION DWG.


2 SUPPLY & INSTALL NEW DOOR TO ACCOMMODATE EXISTING DOOR FRAME, SEE DOOR SCHEDULE.


3 CEILING TILE. SEE LEGEND


- 4 EXISTING WINDOWS TO REMAIN. REPLACE BROKEN GLAZING. REMOVE AND RE-GLAZE INTERIOR WINDOW, WEATHER STRIP & CAULK. CLEAN STORM WINDOW BOTH SIDES & WEATHER CAULK.
- DATCH AND LEVEL FOR NEW FLOOR. SUPPLY & INSTALL 1/4"

 "PRO-BOARD" OVER ENTIRE WASHROOM FLOOR AREAS TO ACCEPT NEW FLOORING. INSTALL NEW FLOORING AS PER MANUFACTURES RECOMMENDATION. SEE ROOM FINISH SCHEDULE.

 SEE MECHANICAL & ELECTRICAL DWG'S FOR CONDUIT & MECHANICAL FLOOR PENETRATION RELOCATIONS.
- 6 RELOCATED EXISTING SANITARY NAPKIN DISPENSER.

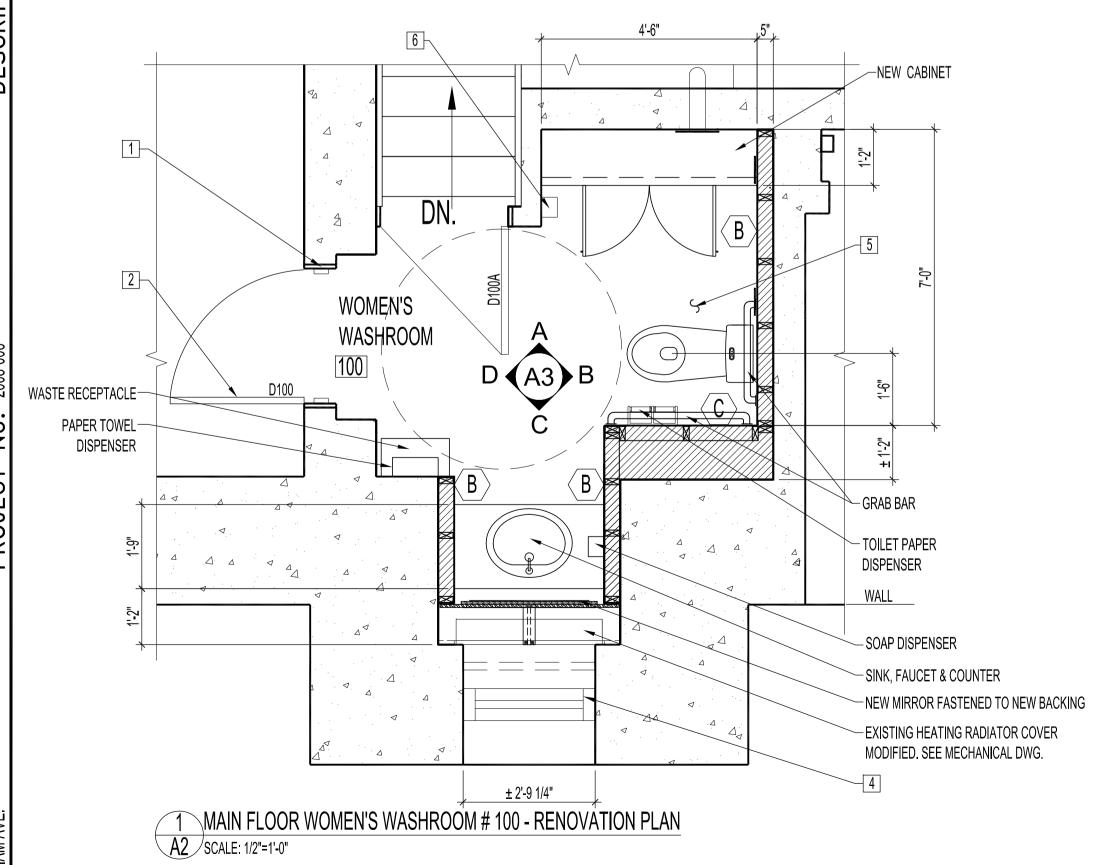

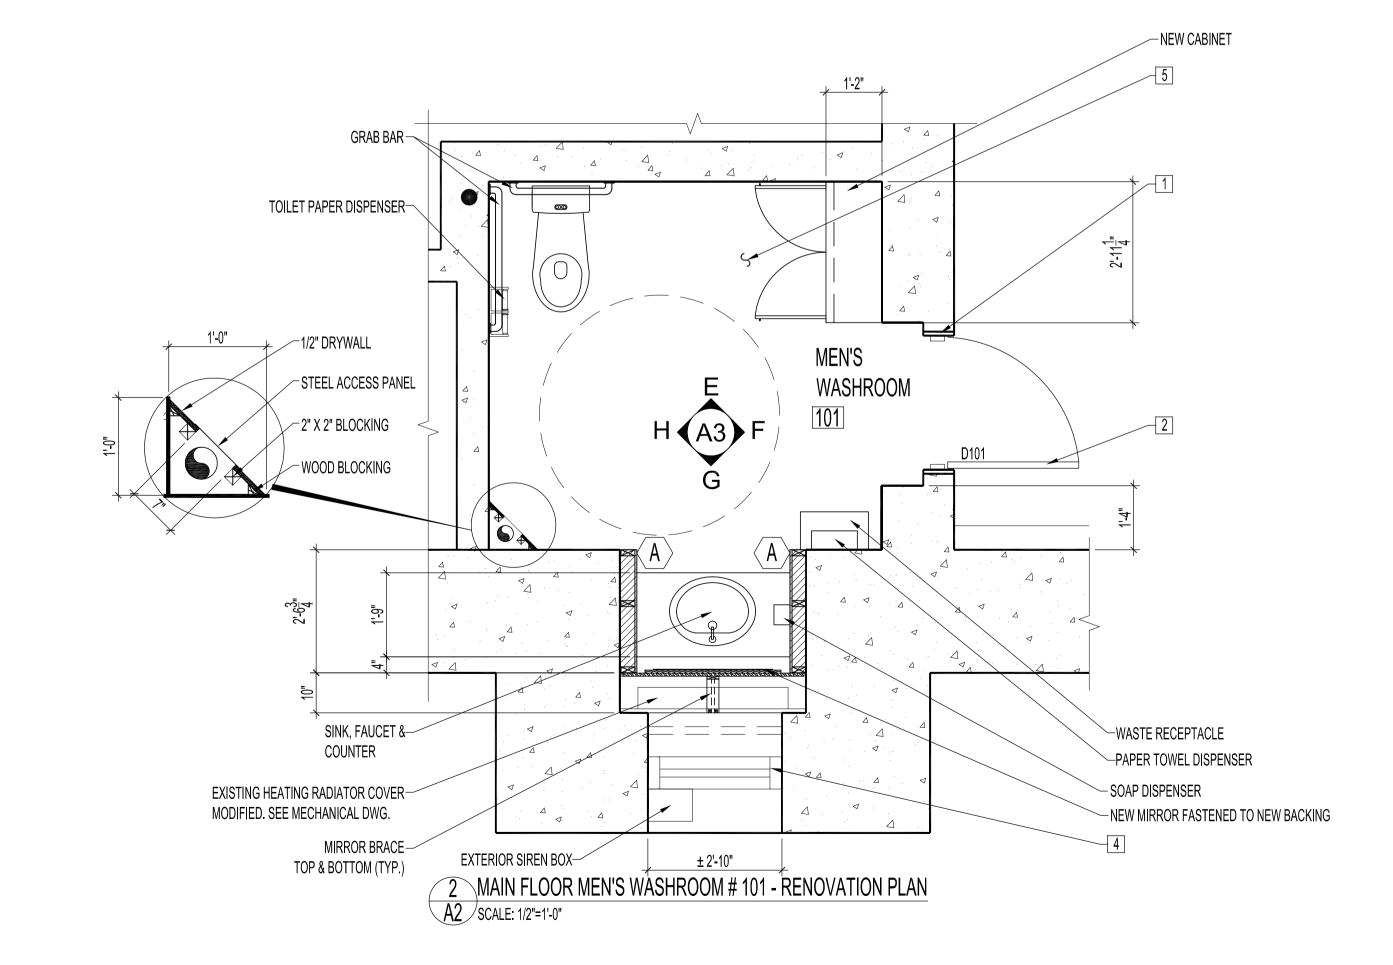



ORIGINAL STAMPED BY: R.K.FOK LI Arch.

DATE: 2008.07.07



DRAWN BY	RCP	CHECKED BY	APPROVED
DATE	2008.07.07	USER APPROVAL	
CITY OF WINNIPEG PLANNING, PROPERTY AND			

Winnipeg
PLANNING, PROPERTY AND
DEVELOPMENT DEPARTMENT
CIVIC ACCOMMODATIONS DIVISION
300 - 65 GARRY ST. R3C 4K4

ARCHIVES BUILDING
BARRIER - FREE UPGRADE TO PUBLIC WASHROOMS

380 WILLIAM AVE.

PARTIAL MAIN FLOOR PLAN
RENOVATION & REFLECTED CEILING PLAN

AS SHOWN 2008-006 SHEET NO.

DRAWING SHEET SIZE: A1 (841mm x 594mm) PLOT 1:1