

BAIRDMORE BLVD

Proposed Manitoba Hydro connection point

For a planting detail of the 6 groups of 3 spruce trees, see Detail 7, L-5
For tree planting layout see L - 4.

Proposed electrical enclosure

6 Cottonwood
10 000 oc
For planting layout see L - 4.

Trees in and around the berm:
Plant as shown, from 4 500 to 6 000
apart, in individual holes.

Additional light

3 Cottonwood in new planting bed
See Detail 6, L-5

LIMIT OF WORK

LEGEND

-  American Basswood
-  Cottonwood
-  Green Ash
-  Fall Gold Ash
-  Bur Oak
-  Manitoba Maple
-  Colorado Spruce
-  New Pole Light

1. Add electrical info July 28, 08 CC
No. Revision Date By
Drawn By: C.C.
Checked By: C.C.
Drawing Date: July 17, 2008
Printing Date:

The Contractor shall verify all dimensions, datums and levels prior to commencement of work. All errors and omissions to be reported to the Contract Administrator before proceeding. This drawing must not be scaled.
Seal

CCLA
CYNTHIA COHLMAYER
LANDSCAPE ARCHITECT
359 McDermot Avenue
Winnipeg MB R3A 0A6
TEL (204) 943-1394
FAX 942-4426
cynthia@cohlarch.ca

KIRKBRIDGE PARK
Phase 3 Site Development
Winnipeg, Manitoba

Sheet Title Project No.
C 0811

SITE PLAN L-1-R1

1
L-5

wooden fence & sign

b.o. berm

3 Fall Gold Ash
6 000 oc

1 800 wide gravel path

b.o. berm

3 Fall Gold Ash
6 000 oc

seed shaded areas
with tall grass mix;
seed all other areas
with park grass mix

Cottonwood

4 Fall Gold Ash
8 700 oc

basin

t.o. basin

1 800 wide gravel path

b.o. berm

basin for skating


existing gravel
parking lot

existing trees

planting bed
See Detail 1, L- 5

section detail
TYPICAL TREE PLANTING

NB: Plant all trees in 2 000 (6") diameter planting holes.

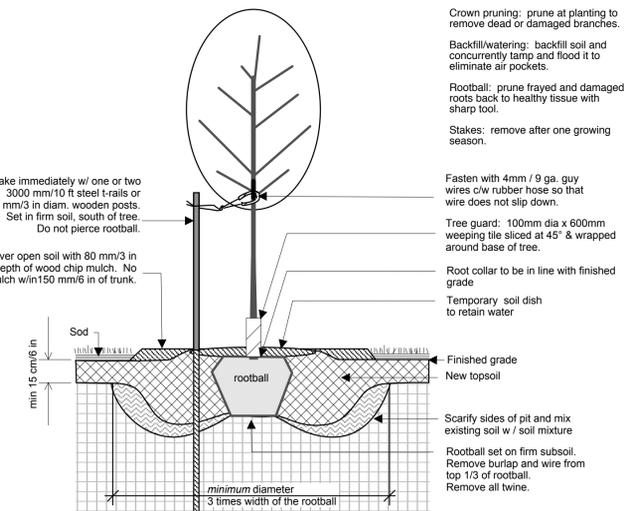

Tree pit to be dug by hand or backhoe, not tree spade.
Orientation: if trees are flagged, orient them as indicated.
Crown pruning: prune at planting to remove dead or damaged branches.
Backfill/watering: backfill soil and concurrently tamp and flood it to eliminate air pockets.
Rootball: prune frayed and damaged roots back to healthy tissue with sharp tool.
Stakes: remove after one growing season.
Fasten with 4mm / 9 ga. guy wires c/w rubber hose so that wire does not slip down.
Tree guard: 100mm dia x 600mm weeping tile sliced at 45° & wrapped around base of tree.
Root collar to be in line with finished grade.
Temporary soil dish to retain water.
Scarify sides of pit and mix existing soil w / soil mixture.
Rootball set on firm subsoil. Remove burlap and wire from top 1/3 of rootball. Remove all twine.

Stake immediately w/ one or two 3000 mm/10 ft steel t-rails or 80 mm/3 in diam. wooden posts. Set in firm soil, south of tree. Do not pierce rootball.
Cover open soil with 80 mm/3 in depth of wood chip mulch. No mulch w/in 150 mm/6 in of trunk.
min 15 cm/6 in Sod
rootball
Finished grade
New topsoil
minimum diameter 3 times width of the rootball

1:500



LEGAL DESCRIPTION: PART BLOCK 44, PLAN No. 12976
(THE NORTHERNMOST PORTION OF KIRKBRIDGE PARK)
TOTAL GROSS AREA: 25,000 M2

CALDERWOOD BAY

MARRINGTON RD