



**1 Multi Flo Connection Details**  
L-7 Scale: 1:5

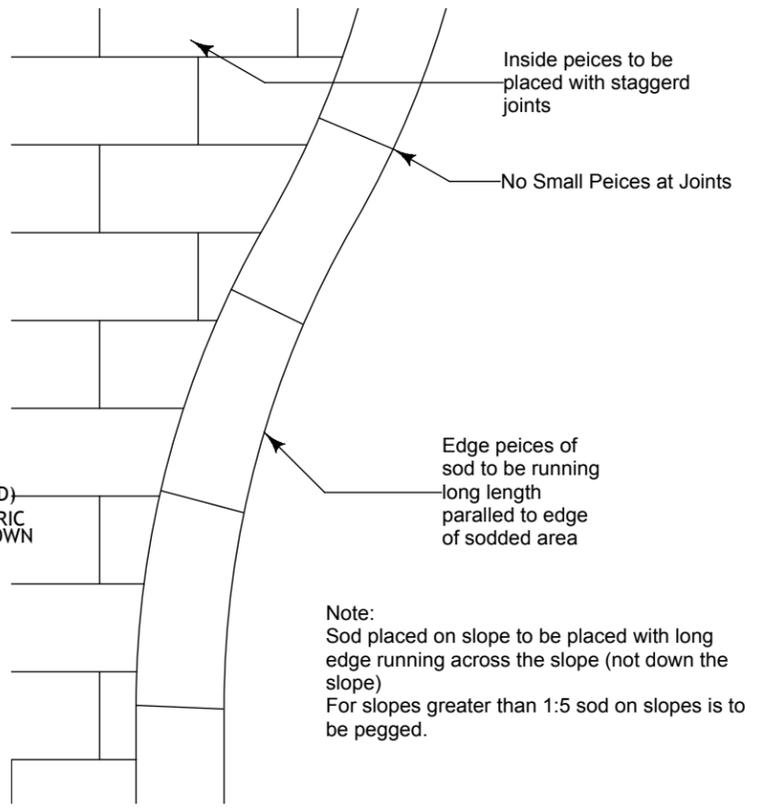


**5 Sod Pattern**  
L-7 Scale: 1:50

Pressure treated rough post, free of bark and with solid core, 19 to 23 cm diameter. Chamfir 5 cm at top of post. Posts to be located not more than 1.8 m o.c.. Unless otherwise directed by contract administrator top elevation of post is to follow finish grade. Post are to be spaced evenly not more than 1.8 M o.c. with the largest diameter of the post at the bottom.

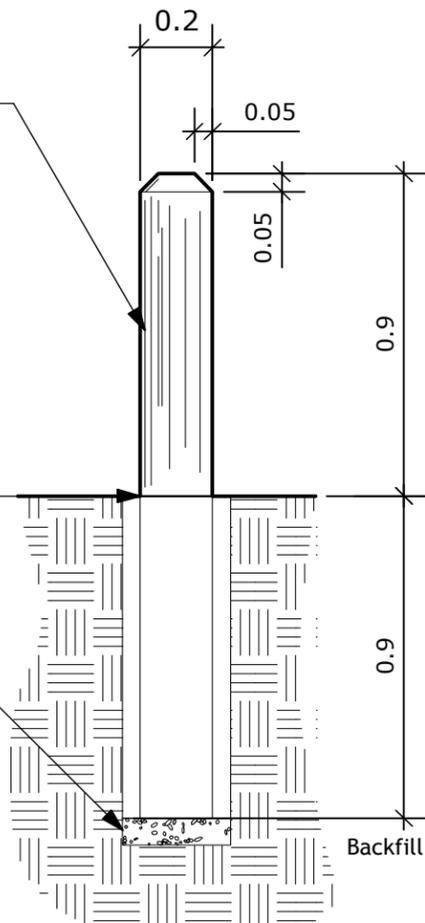


**4 Sod Detail**  
L-7 Scale: 1:10

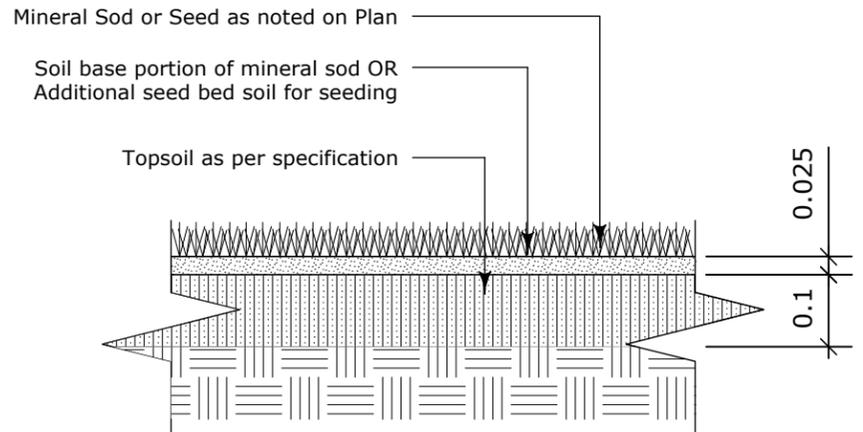

**6 Bollard**  
L-7 Scale: 1:20

5 to 10 mm Crusher Fines Limestone  
Compacted 20 mm  $\phi$  down Limestone  
40 mm down crushed limestone  
Geotextile, turn up sides at edge

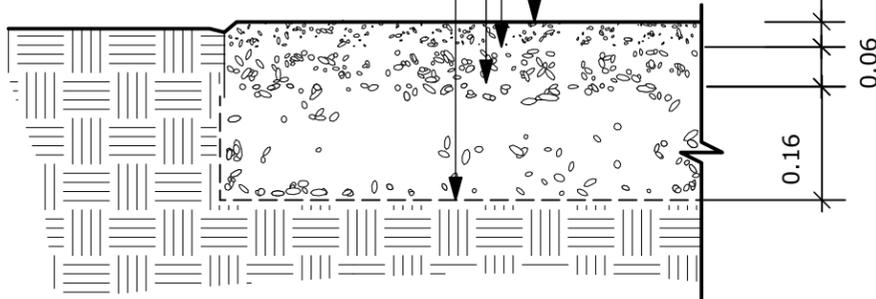

**2 Multi Flo Trench under Play Safety Surface**  
L-7 Scale: 1:10

**3 Crusher Fines Paving**  
L-7 Scale: 1:10