



THE CITY OF WINNIPEG

BID OPPORTUNITY

BID OPPORTUNITY NO. 533-2010

**2010 ACTIVE TRANSPORTATION INFRASTRUCTURE STIMULUS PROGRAM –
ASSINIBOINE AVENUE: KENNEDY STREET TO MAIN STREET – BIKE
BOULEVARD**

TABLE OF CONTENTS

PART A - BID SUBMISSION

Form A: Bid	1
Form B: Prices	4
Form G1: Bid Bond and Agreement to Bond	8
Form G2: Irrevocable Standby Letter of Credit and Undertaking	10

PART B - BIDDING PROCEDURES

B1. Contract Title	1
B2. Submission Deadline	1
B3. Enquiries	1
B4. Addenda	1
B5. Substitutes	2
B6. Bid Components	3
B7. Bid	3
B8. Prices	4
B9. Qualification	4
B10. Bid Security	5
B11. Opening of Bids and Release of Information	6
B12. Irrevocable Bid	6
B13. Withdrawal of Bids	6
B14. Evaluation of Bids	7
B15. Award of Contract	8

PART C - GENERAL CONDITIONS

C0. General Conditions	1
------------------------	---

PART D - SUPPLEMENTAL CONDITIONS

General

D1. General Conditions	1
D2. Scope of Work	1
D3. Contract Administrator	1
D4. Contractor's Supervisor	2
D5. Notices	2
D6. Furnishing of Documents	2

Submissions

D7. Authority to Carry on Business	2
D8. Safe Work Plan	3
D9. Insurance	3
D10. Performance Security	4
D11. Subcontractor List	4
D12. Detailed Work Schedule	4

Schedule of Work

D13. Commencement	4
D14. Restricted Work Hours	5
D15. Work By Others	5
D16. Substantial Performance	5
D17. Total Performance	5
D18. Liquidated Damages	5
D19. Scheduled Maintenance	6

Control of Work

D20. Job Meetings	6
D21. Prime Contractor – The Workplace Safety and Health Act (Manitoba)	6

Warranty

D22. Warranty	6
Form H1: Performance Bond	7
Form H2: Irrevocable Standby Letter of Credit	9
Form J: Subcontractor List	11
Form L: Detailed Work Schedule	12

PART E - SPECIFICATIONS

General

E1. Applicable Specifications and Drawings	1
E2. Protection Of Existing Trees	1
E3. Traffic Control	2
E4. Traffic Management	2
E5. Pedestrian and Cyclist Safety	2
E6. Water Obtained From the City	3
E7. Tree Removal	3
E8. Recycled Concrete Base Course Material	3
E9. 100 mm Concrete Sidewalk With Paving Stone, And Brick Inset	4
E10. Boulevard Restoration	5
E11. Removal of Existing Decorative Fence	5
E12. Sign Support Clamps	5
E13. Interlocking Paving Stones	5
E14. Coloured Concrete	7
E15. Trees	7
E16. Supply and Install Detectable Warning Surface Tiles	14

PART B - BIDDING PROCEDURES

B1. CONTRACT TITLE

- B1.1 2010 ACTIVE TRANSPORTATION INFRASTRUCTURE STIMULUS PROGRAM –
ASSINIBOINE AVENUE: KENNEDY STREET TO MAIN STREET – BIKE BOULEVARD

B2. SUBMISSION DEADLINE

- B2.1 The Submission Deadline is 12:00 noon Winnipeg time, July 23, 2010.
- B2.2 Bids determined by the Manager of Materials to have been received later than the Submission Deadline will not be accepted and will be returned upon request.
- B2.3 The Contract Administrator or the Manager of Materials may extend the Submission Deadline by issuing an addendum at any time prior to the time and date specified in B2.1.

B3. ENQUIRIES

- B3.1 All enquiries shall be directed to the Contract Administrator identified in D3.1.
- B3.2 If the Bidder finds errors, discrepancies or omissions in the Bid Opportunity, or is unsure of the meaning or intent of any provision therein, the Bidder shall notify the Contract Administrator of the error, discrepancy or omission, or request a clarification as to the meaning or intent of the provision at least five (5) Business Days prior to the Submission Deadline.
- B3.3 Responses to enquiries which, in the sole judgment of the Contract Administrator, require a correction to or a clarification of the Bid Opportunity will be provided by the Contract Administrator to all Bidders by issuing an addendum.
- B3.4 Responses to enquiries which, in the sole judgment of the Contract Administrator, do not require a correction to or a clarification of the Bid Opportunity will be provided by the Contract Administrator only to the Bidder who made the enquiry.
- B3.5 The Bidder shall not be entitled to rely on any response or interpretation received pursuant to B3 unless that response or interpretation is provided by the Contract Administrator in writing.

B4. ADDENDA

- B4.1 The Contract Administrator may, at any time prior to the Submission deadline, issue addenda correcting errors, discrepancies or omissions in the Bid Opportunity, or clarifying the meaning or intent of any provision therein.
- B4.2 The Contract Administrator will issue each addendum at least two (2) Business Days prior to the Submission Deadline, or provide at least two (2) Business Days by extending the Submission Deadline.
- B4.2.1 Addenda will be available on the Bid Opportunities page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt/bidopp.asp>
- B4.2.2 The Bidder is responsible for ensuring that he has received all addenda and is advised to check the Materials Management Division website for addenda regularly and shortly before the Submission Deadline, as may be amended by addendum.
- B4.3 The Bidder shall acknowledge receipt of each addendum in Paragraph 10 of Form A: Bid. Failure to acknowledge receipt of an addendum may render a Bid non-responsive.

B5. SUBSTITUTES

- B5.1 The Work is based on the Plant, Materials and methods specified in the Bid Opportunity.
- B5.2 Substitutions shall not be allowed unless application has been made to and prior approval has been granted by the Contract Administrator in writing.
- B5.3 Requests for approval of a substitute will not be considered unless received in writing by the Contract Administrator at least five (5) Business Days prior to the Submission Deadline.
- B5.4 The Bidder shall ensure that any and all requests for approval of a substitute:
- (a) provide sufficient information and details to enable the Contract Administrator to determine the acceptability of the Plant, Material or method as either an approved equal or alternative;
 - (b) identify any and all changes required in the applicable Work, and all changes to any other Work, which would become necessary to accommodate the substitute;
 - (c) identify any anticipated cost or time savings that may be associated with the substitute;
 - (d) certify that, in the case of a request for approval as an approved equal, the substitute will fully perform the functions called for by the general design, be of equal or superior substance to that specified, is suited to the same use and capable of performing the same function as that specified and can be incorporated into the Work, strictly in accordance with the proposed work schedule and the dates specified in the Supplemental Conditions for Substantial Performance and Total Performance;
 - (e) certify that, in the case of a request for approval as an approved alternative, the substitute will adequately perform the functions called for by the general design, be similar in substance to that specified, is suited to the same use and capable of performing the same function as that specified and can be incorporated into the Work, strictly in accordance with the proposed work schedule and the dates specified in the Supplemental Conditions for Substantial Performance and Total Performance.
- B5.5 The Contract Administrator, after assessing the request for approval of a substitute, may in his sole discretion grant approval for the use of a substitute as an “approved equal” or as an “approved alternative”, or may refuse to grant approval of the substitute.
- B5.6 The Contract Administrator will provide a response in writing, at least two (2) Business Days prior to the Submission Deadline, only to the Bidder who requested approval of the substitute.
- B5.6.1 The Bidder requesting and obtaining the approval of a substitute shall be entirely responsible for disseminating information regarding the approval to any person or persons he wishes to inform.
- B5.7 If the Contract Administrator approves a substitute as an “approved equal”, any Bidder may use the approved equal in place of the specified item.
- B5.8 If the Contract Administrator approves a substitute as an “approved alternative”, any Bidder bidding that approved alternative may base his Total Bid Price upon the specified item but may also indicate an alternative price based upon the approved alternative. Such alternatives will be evaluated in accordance with B14.
- B5.9 No later claim by the Contractor for an addition to the Total Bid Price because of any other changes in the Work necessitated by the use of an approved equal or an approved alternative will be considered.
- B5.10 Notwithstanding B5.2 to B5.9, in accordance with B6.6, deviations inconsistent with the Bid Opportunity document shall be evaluated in accordance with B14.1(a).

B6. BID COMPONENTS

B6.1 The Bid shall consist of the following components:

- (a) Form A: Bid;
- (b) Form B: Prices, hard copy;
- (c) Bid Security;
 - (i) Form G1: Bid Bond and Agreement to Bond, or
Form G2: Irrevocable Standby Letter of Credit and Undertaking, or
a certified cheque or draft;

B6.2 Further to B6.1, the Bidder should include the written correspondence from the Contract Administrator approving a substitute in accordance with B5.

B6.3 All components of the Bid shall be fully completed or provided, and submitted by the Bidder no later than the Submission Deadline, with all required entries made clearly and completely, to constitute a responsive Bid.

B6.4 The Bid shall be submitted enclosed and sealed in an envelope clearly marked with the Bid Opportunity number and the Bidder's name and address.

B6.4.1 Samples or other components of the Bid which cannot reasonably be enclosed in the envelope may be packaged separately, but shall be clearly marked with the Bid Opportunity number, the Bidder's name and address, and an indication that the contents are part of the Bidder's Bid.

B6.4.2 A hard copy of Form B: Prices must be submitted with the Bid. If there is any discrepancy between the Adobe PDF version of Form B: Prices and the Microsoft Excel version of Form B: Prices, the PDF version shall take precedence.

B6.5 Bidders are advised not to include any information/literature except as requested in accordance with B6.1.

B6.6 Bidders are advised that inclusion of terms and conditions inconsistent with the Bid Opportunity document, including the General Conditions, will be evaluated in accordance with B14.1(a).

B6.7 Bids submitted by facsimile transmission (fax) or internet electronic mail (e-mail) will not be accepted.

B6.8 Bids shall be submitted to:

The City of Winnipeg
Corporate Finance Department
Materials Management Division
185 King Street, Main Floor
Winnipeg MB R3B 1J1

B7. BID

B7.1 The Bidder shall complete Form A: Bid, making all required entries.

B7.2 Paragraph 2 of Form A: Bid shall be completed in accordance with the following requirements:

- (a) if the Bidder is a sole proprietor carrying on business in his own name, his name shall be inserted;
- (b) if the Bidder is a partnership, the full name of the partnership shall be inserted;
- (c) if the Bidder is a corporation, the full name of the corporation shall be inserted;

- (d) if the Bidder is carrying on business under a name other than his own, the business name and the name of every partner or corporation who is the owner of such business name shall be inserted.

B7.2.1 If a Bid is submitted jointly by two or more persons, each and all such persons shall identify themselves in accordance with B7.2.

B7.3 In Paragraph 3 of Form A: Bid, the Bidder shall identify a contact person who is authorized to represent the Bidder for purposes of the Bid.

B7.4 Paragraph 12 of Form A: Bid shall be signed in accordance with the following requirements:

- (a) if the Bidder is a sole proprietor carrying on business in his own name, it shall be signed by the Bidder;
- (b) if the Bidder is a partnership, it shall be signed by the partner or partners who have authority to sign for the partnership;
- (c) if the Bidder is a corporation, it shall be signed by its duly authorized officer or officers and the corporate seal, if the corporation has one, shall be affixed;
- (d) if the Bidder is carrying on business under a name other than his own, it shall be signed by the registered owner of the business name, or by the registered owner's authorized officials if the owner is a partnership or a corporation.

B7.4.1 The name and official capacity of all individuals signing Form A: Bid should be printed below such signatures.

B7.5 If a Bid is submitted jointly by two or more persons, the word "Bidder" shall mean each and all such persons, and the undertakings, covenants and obligations of such joint Bidders in the Bid and the Contract, when awarded, shall be both joint and several.

B8. PRICES

B8.1 The Bidder shall state a price in Canadian funds for each item of the Work identified on Form B: Prices.

B8.1.1 For the convenience of Bidders, and pursuant to B6.4.2 and B14.4.2, an electronic spreadsheet Form B: Prices in Microsoft Excel (.xls) format is available along with the Adobe PDF documents for this Bid Opportunity on the Bid Opportunities page at the Materials Management Division website at <http://www.winnipeg.ca/matmgt>

B8.2 The quantities listed on Form B: Prices are to be considered approximate only. The City will use said quantities for the purpose of comparing Bids.

B8.3 The quantities for which payment will be made to the Contractor are to be determined by the Work actually performed and completed by the Contractor, to be measured as specified in the applicable Specifications.

B8.4 Prices from Non-Resident Bidders are subject to a Non-Resident Withholding Tax pursuant to the Income Tax Act (Canada).

B9. QUALIFICATION

B9.1 The Bidder shall:

- (a) undertake to be in good standing under The Corporations Act (Manitoba), or properly registered under The Business Names Registration Act (Manitoba), or otherwise properly registered, licensed or permitted by law to carry on business in Manitoba; and
- (b) be financially capable of carrying out the terms of the Contract; and
- (c) have all the necessary experience, capital, organization, and equipment to perform the Work in strict accordance with the terms and provisions of the Contract.

- B9.2 The Bidder and any proposed Subcontractor (for the portion of the Work proposed to be subcontracted to them) shall:
- (a) be responsible and not be suspended, debarred or in default of any obligations to the City. A list of suspended or debarred individuals and companies is available on the Information Connection page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt/debar.stm>
- B9.3 The Bidder and/or any proposed Subcontractor (for the portion of the Work proposed to be subcontracted to them) shall:
- (a) have successfully carried out work similar in nature, scope and value to the Work; and
 - (b) be fully capable of performing the Work required to be in strict accordance with the terms and provisions of the Contract; and
 - (c) have a written workplace safety and health program if required pursuant to The Workplace Safety and Health Act (Manitoba);
- B9.4 Further to B9.3(c), the Bidder shall, within five (5) Business Days of a request by the Contract Administrator, provide proof satisfactory to the Contract Administrator that the Bidder/Subcontractor has a workplace safety and health program meeting the requirements of The Workplace Safety and Health Act (Manitoba), by providing:
- (a) a valid COR certification number under the Certificate of Recognition (COR) Program administered by the Manitoba Construction Safety Association or by the Manitoba Heavy Construction Association's Safety, Health and Environment Program; or
 - (b) a report or letter to that effect from an independent reviewer acceptable to the City. (A list of acceptable reviewers and the review template are available on the Information Connection page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt>)
- B9.5 The Bidder shall submit, within three (3) Business Days of a request by the Contract Administrator, proof satisfactory to the Contract Administrator of the qualifications of the Bidder and of any proposed Subcontractor.
- B9.6 The Bidder shall provide, on the request of the Contract Administrator, full access to any of the Bidder's equipment and facilities to confirm, to the Contract Administrator's satisfaction, that the Bidder's equipment and facilities are adequate to perform the Work.

B10. BID SECURITY

- B10.1 The Bidder shall provide bid security in the form of:
- (a) a bid bond, in the amount of at least ten percent (10%) of the Total Bid Price, and agreement to bond of a company registered to conduct the business of a surety in Manitoba, in the form included in the Bid Submission (Form G1: Bid Bond and Agreement to Bond); or
 - (b) an irrevocable standby letter of credit, in the amount of at least ten percent (10%) of the Total Bid Price, and undertaking issued by a bank or other financial institution registered to conduct business in Manitoba and drawn on a branch located in Winnipeg, in the form included in the Bid Submission (Form G2: Irrevocable Standby Letter of Credit and Undertaking); or
 - (c) a certified cheque or draft payable to "The City of Winnipeg", in the amount of at least fifty percent (50%) of the Total Bid Price, drawn on a bank or other financial institution registered to conduct business in Manitoba.
- B10.1.1 If the Bidder submits alternative bids, the bid security shall be in the amount of the specified percentage of the highest Total Bid Price submitted.
- B10.1.2 All signatures on bid securities shall be original.
- B10.1.3 The Bidder shall sign the Bid Bond.

- B10.1.4 The Surety shall sign and affix its corporate seal on the Bid Bond and the Agreement to Bond.
- B10.2 The bid security of the successful Bidder and the next two lowest evaluated responsive and responsible Bidders will be released by the City when a Contract for the Work has been duly executed by the successful Bidder and the performance security furnished as provided herein. The bid securities of all other Bidders will be released when a Contract is awarded.
- B10.2.1 Where the bid security provided by the successful Bidder is in the form of a certified cheque or draft pursuant to B10.1(c), it will be deposited and retained by the City as the performance security and no further submission is required.
- B10.2.2 The City will not pay any interest on certified cheques or drafts furnished as bid security or subsequently retained as performance security.
- B10.3 The bid securities of all Bidders will be released by the City as soon as practicable following notification by the Contract Administrator to the Bidders that no award of Contract will be made pursuant to the Bid Opportunity.

B11. OPENING OF BIDS AND RELEASE OF INFORMATION

- B11.1 Bids will be opened publicly, after the Submission Deadline has elapsed, in the office of the Corporate Finance Department, Materials Management Division, or in such other office as may be designated by the Manager of Materials.
- B11.1.1 Bidders or their representatives may attend.
- B11.1.2 Bids determined by the Manager of Materials, or his designate, to not include the bid security specified in B10 will not be read out.
- B11.2 Following the submission deadline, the names of the Bidders and their Total Bid Prices (unevaluated, and pending review and verification of conformance with requirements) will be available on the Closed Bid Opportunities (or Public/Posted Opening & Award Results) page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt>
- B11.3 After award of Contract, the name(s) of the successful Bidder(s) and the Contract Amount(s) will be available on the Closed Bid Opportunities (or Public/Posted Opening & Award Results) page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt>
- B11.4 The Bidder is advised that any information contained in any Bid may be released if required by City policy or procedures, by The Freedom of Information and Protection of Privacy Act (Manitoba), by other authorities having jurisdiction, or by law.

B12. IRREVOCABLE BID

- B12.1 The Bid(s) submitted by the Bidder shall be irrevocable for the time period specified in Paragraph 11 of Form A: Bid.
- B12.2 The acceptance by the City of any Bid shall not release the Bids of the next two lowest evaluated responsive Bidders and these Bidders shall be bound by their Bids on such Work until a Contract for the Work has been duly executed and the performance security furnished as herein provided, but any Bid shall be deemed to have lapsed unless accepted within the time period specified in Paragraph 11 of Form A: Bid.

B13. WITHDRAWAL OF BIDS

- B13.1 A Bidder may withdraw his Bid without penalty by giving written notice to the Manager of Materials at any time prior to the Submission Deadline.

- B13.1.1 Notwithstanding C23.3, the time and date of receipt of any notice withdrawing a Bid shall be the time and date of receipt as determined by the Manager of Materials.
- B13.1.2 The City will assume that any one of the contact persons named in Paragraph 3 of Form A: Bid or the Bidder's authorized representatives named in Paragraph 12 of Form A: Bid, and only such person, has authority to give notice of withdrawal.
- B13.1.3 If a Bidder gives notice of withdrawal prior to the Submission Deadline, the Manager of Materials will:
- (a) retain the Bid until after the Submission Deadline has elapsed;
 - (b) open the Bid to identify the contact person named in Paragraph 3 of Form A: Bid and the Bidder's authorized representatives named in Paragraph 12 of Form A: Bid; and
 - (c) if the notice has been given by any one of the persons specified in B13.1.3(b), declare the Bid withdrawn.
- B13.2 A Bidder who withdraws his Bid after the Submission Deadline but before his Bid has been released or has lapsed as provided for in B12.2 shall be liable for such damages as are imposed upon the Bidder by law and subject to such sanctions as the Chief Administrative Officer considers appropriate in the circumstances. The City, in such event, shall be entitled to all rights and remedies available to it at law, including the right to retain the Bidder's bid security.

B14. EVALUATION OF BIDS

- B14.1 Award of the Contract shall be based on the following bid evaluation criteria:
- (a) compliance by the Bidder with the requirements of the Bid Opportunity, or acceptable deviation therefrom (pass/fail);
 - (b) qualifications of the Bidder and the Subcontractors, if any, pursuant to B9 (pass/fail);
 - (c) Total Bid Price;
 - (d) economic analysis of any approved alternative pursuant to B5.
- B14.2 Further to B14.1(a), the Award Authority may reject a Bid as being non-responsive if the Bid is incomplete, obscure or conditional, or contains additions, deletions, alterations or other irregularities. The Award Authority may reject all or any part of any Bid, or waive technical requirements or minor informalities or irregularities, if the interests of the City so require.
- B14.3 Further to B14.1(b), the Award Authority shall reject any Bid submitted by a Bidder who does not demonstrate, in his Bid or in other information required to be submitted, that he is responsible and qualified.
- B14.4 Further to B14.1(c), the Total Bid Price shall be the sum of the quantities multiplied by the unit prices for each item shown on Form B: Prices.
- B14.4.1 If there is any discrepancy between the Total Bid Price written in figures, the Total Bid Price written in words and the sum of the quantities multiplied by the unit prices for each item, the sum of the quantities multiplied by the unit prices for each item shall take precedence.
- B14.4.2 Further to B14.1(a), in the event that a unit price is not provided on Form B: Prices, the City will determine the unit price by dividing the Amount (extended price) by the approximate quantity, for the purposes of evaluation and payment.
- B14.4.3 The electronic Form B: Prices and the formulas imbedded in that spreadsheet are only provided for the convenience of Bidders. The City makes no representations or warranties as to the correctness of the imbedded formulas. It is the Bidder's responsibility to ensure the extensions of the unit prices and the sum of Total Bid Price performed as a function of the formulas within the electronic Form B: Prices are correct.

B15. AWARD OF CONTRACT

- B15.1 The City will give notice of the award of the Contract or will give notice that no award will be made.
- B15.2 The City will have no obligation to award a Contract to a Bidder, even though one or all of the Bidders are determined to be responsible and qualified, and the Bids are determined to be responsive.
- B15.2.1 Without limiting the generality of B15.2, the City will have no obligation to award a Contract where:
- (a) the prices exceed the available City funds for the Work;
 - (b) the prices are materially in excess of the prices received for similar work in the past;
 - (c) the prices are materially in excess of the City's cost to perform the Work, or a significant portion thereof, with its own forces;
 - (d) only one Bid is received; or
 - (e) in the judgment of the Award Authority, the interests of the City would best be served by not awarding a Contract.
- B15.3 Where an award of Contract is made by the City, the award shall be made to the responsible and qualified Bidder submitting the lowest evaluated responsive Bid, in accordance with B14.
- B15.3.1 Following the award of contract, a Bidder will be provided with information related to the evaluation of his Bid upon written request to the Contract Administrator.

PART C - GENERAL CONDITIONS

C0. GENERAL CONDITIONS

- C0.1 The *General Conditions for Construction* (Revision 2006 12 15) are applicable to the Work of the Contract.
- C0.1.1 The *General Conditions for Construction* are available on the Information Connection page at The City of Winnipeg, Corporate Finance, Materials Management Division website at http://www.winnipeg.ca/matmgt/gen_cond.stm
- C0.2 A reference in the Bid Opportunity to a section, clause or subclause with the prefix “**C**” designates a section, clause or subclause in the *General Conditions for Construction*.

PART D - SUPPLEMENTAL CONDITIONS

GENERAL

D1. GENERAL CONDITIONS

D1.1 In addition to the General Conditions for Construction, these Supplemental Conditions are applicable to the Work of the Contract.

D2. SCOPE OF WORK

D2.1 The Work to be done under the Contract shall consist of:

- (a) Construction of a Bike Boulevard
 - (i) Kennedy Street to Main Street

D2.2 The major components of the Work are as follows:

- (a) Construction of a Bike Boulevard
 - (i) Planing of asphalt overlay
 - (ii) Removal of asphalt overaly
 - (iii) Removal of existing curb
 - (iv) Excavation
 - (v) Placement of separation/reinforcement fabric
 - (vi) Placement of sub base and base course material
 - (vii) Construct 200mm reinforced concrete pavement
 - (viii) Construction of monolithic mountable median slab
 - (ix) Placement of 3.5m asphalt wearing surface (average thickness – 75mm)
 - (x) Installation of catchbasins and connection pipe
 - (xi) Renewal of existing curbs
 - (xii) Renewal of existing concrete sidewalk
 - (xiii) Construction of concrete sidewalk c/w block out for pavers
 - (xiv) Installation of paving stones
 - (xv) Supply and installation of detectable warning surfaces
 - (xvi) Boulevard Restoration
- (b) Intersection Improvements and Roadway Realignment

D3. CONTRACT ADMINISTRATOR

D3.1 The Contract Administrator is Stantec Consulting Ltd., represented by:

Scott Suderman, C.E.T., P.Eng.
Transportation Engineer
100-1355 Taylor Avenue

Telephone No. (204) 928-8837
Facsimile No. (204) 453-9012

D3.2 At the pre-construction meeting, Scott Suderman, C.E.T., P.Eng. will identify additional personnel representing the Contract Administrator and their respective roles and responsibilities for the Work.

D4. CONTRACTOR'S SUPERVISOR

- D4.1 At the pre-construction meeting, the Contractor shall identify his designated supervisor and any additional personnel representing the Contractor and their respective roles and responsibilities for the Work.
- D4.2 At least two (2) business days prior to the commencement of any Work on the site, the Contractor shall provide the Contract Administrator with a phone number where the supervisor identified in D4.1 or an alternate can be contacted twenty-four (24) hours a day to respond to an emergency.

D5. NOTICES

- D5.1 Except as provided for in C23.2.2, all notices, requests, nominations, proposals, consents, approvals, statements, authorizations, documents or other communications to the Contractor shall be sent to the address or facsimile number identified by the Contractor in Paragraph 2 of Form A: Bid.
- D5.2 All notices, requests, nominations, proposals, consents, approvals, statements, authorizations, documents or other communications to the City, except as expressly otherwise required in D5.3, D5.4 or elsewhere in the Contract, shall be sent to the attention of the Contract Administrator at the address or facsimile number identified in D3.1.

- D5.3 Notwithstanding C21., all notices of appeal to the Chief Administrative Officer shall be sent to the attention of the Chief Financial Officer at the following address or facsimile number:

The City of Winnipeg
Chief Financial Officer
Administration Building, 3rd Floor
510 Main Street
Winnipeg MB R3B 1B9
Facsimile No.: (204) 949-1174

- D5.4 All notices, requests, nominations, proposals, consents, approvals, statements, authorizations, documents or other communications required to be submitted or returned to the City Solicitor shall be sent to the following address or facsimile number:

The City of Winnipeg
Internal Services Department
Legal Services Division
Attn: City Solicitor
185 King Street, 3rd Floor
Winnipeg MB R3B 1J1
Facsimile No.: (204) 947-9155

D6. FURNISHING OF DOCUMENTS

- D6.1 Upon award of the Contract, the Contractor will be provided with five (5) complete sets of the Bid Opportunity. If the Contractor requires additional sets of the Bid Opportunity, they will be supplied to him at cost.

SUBMISSIONS

D7. AUTHORITY TO CARRY ON BUSINESS

- D7.1 The Contractor shall be in good standing under The Corporations Act (Manitoba), or properly registered under The Business Names Registration Act (Manitoba), or otherwise properly registered, licensed or permitted by law to carry on business in Manitoba, or if the Contractor does not carry on business in Manitoba, in the jurisdiction where the Contractor does carry on

business, throughout the term of the Contract, and shall provide the Contract Administrator with evidence thereof upon request.

D8. SAFE WORK PLAN

- D8.1 The Contractor shall provide the Contract Administrator with a Safe Work Plan at least five (5) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in C4.1 for the return of the executed Contract.
- D8.2 The Safe Work Plan shall be prepared and submitted in the format shown in the City's template which is available on the Information Connection page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt/safety/default.stm>

D9. INSURANCE

- D9.1 The Contractor shall provide and maintain the following insurance coverage:
- (a) Commercial general liability insurance, in the amount of at least two million dollars (\$2,000,000.00) inclusive, with The City of Winnipeg, The Province of Manitoba and The Government of Canada, including authorized officials and representatives of the aforementioned, added as an additional insureds; such liability policy to also contain a cross-liability clause, contractual liability, unlicensed motor vehicle liability (contractors' equipment), broad form property damage cover and products and completed operations, to remain in place at all times during the performance of the Work and throughout the warranty period;
 - (i) Completed operations cover shall extend for a minimum of twenty-four (24) months beyond Total Performance date;
 - (ii) The policy shall provide coverage for the aforementioned entities as well as all contractors and consultants and their directors, officers, employees and agents. A wrap-up liability policy, covering the entire scope of the Work may be purchased in place of a commercial general liability policy;
 - (b) Automobile liability insurance for owned and non-owned automobiles used for or in connection with the Work in the amount of at least two million dollars (\$2,000,000.00) to be retained at all times during the performance of the Work and until the date of Total Performance; such insurance may be met through the commercial general liability cover where applicable;
 - (c) Builder's Risk insurance (Broad Form) including testing and commissioning, in the amount of one hundred percent (100%) of the total construction costs; written in the name of the Contractor, The City of Winnipeg and all other contractors, sub-contractors, engineering and architectural consultants etcetera;
 - (d) Any other insurances, carrying suitable limits and deductibles, as may be required to cover the scope of Work;
- D9.2 All Policies shall be taken out with insurers licensed to and carrying on business in the Province of Manitoba.
- D9.3 Deductibles shall be borne by the Contractor.
- D9.4 The Contractor shall provide the Contract Administrator with a certificate of insurance of each policy, in a form satisfactory to the City Solicitor, at least two (2) Business Days prior to the commencement of any Work on the site.
- D9.5 The Contractor shall not cancel, or cause any such policy or policies to lapse without providing at least thirty (30) Calendar Days prior written notice to the Contract Administrator.
- D9.6 The Contractor shall provide written notice to the City of Winnipeg of any material changes to their policies within thirty (30) days of the change taking effect.

D9.7 The City shall have the right to alter the limits and/or coverage's as reasonably required from time to time during the continuance of this agreement.

D10. PERFORMANCE SECURITY

D10.1 The Contractor shall provide and maintain performance security until the expiration of the warranty period in the form of:

- (a) a performance bond of a company registered to conduct the business of a surety in Manitoba, in the form attached to these Supplemental Conditions (Form H1: Performance Bond), in the amount of fifty percent (50%) of the Contract Price; or
- (b) an irrevocable standby letter of credit issued by a bank or other financial institution registered to conduct business in Manitoba and drawn on a branch located in Winnipeg, in the form attached to these Supplemental Conditions (Form H2: Irrevocable Standby Letter of Credit), in the amount of fifty percent (50%) of the Contract Price; or
- (c) a certified cheque or draft payable to "The City of Winnipeg", drawn on a bank or other financial institution registered to conduct business in Manitoba, in the amount of fifty percent (50%) of the Contract Price.

D10.1.1 Where the performance security is in the form of a certified cheque or draft, it will be deposited by the City. The City will not pay any interest on certified cheques or drafts furnished as performance security.

D10.2 If the bid security provided in his Bid was not a certified cheque or draft pursuant to B10.1(c), the Contractor shall provide the City Solicitor with the required performance security within seven (7) Calendar Days of notification of the award of the Contract by way of letter of intent and prior to the commencement of any Work on the Site and in no event later than the date specified in the C4.1 for the return of the executed Contract.

D11. SUBCONTRACTOR LIST

D11.1 The Contractor shall provide the Contract Administrator with a complete list of the Subcontractors whom the Contractor proposes to engage (Form J: Subcontractor List) at or prior to a pre-construction meeting, or at least two (2) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in the C4.1 for the return of the executed Contract.

D12. DETAILED WORK SCHEDULE

D12.1 The Contractor shall provide the Contract Administrator with a detailed work schedule (Form L: Detailed Work Schedule) at least two (2) Business Days prior to the commencement of any Work on the Site but in no event later than the date specified in the General Conditions for the return of the executed Contract.

SCHEDULE OF WORK

D13. COMMENCEMENT

D13.1 The Contractor shall not commence any Work until he is in receipt of a letter of intent from the Award Authority authorizing the commencement of the Work.

D13.2 The Contractor shall not commence any Work on the Site until:

- (a) the Contract Administrator has confirmed receipt and approval of:
 - (i) evidence of authority to carry on business specified in D7;
 - (ii) evidence of the workers compensation coverage specified in C6.15;
 - (iii) the twenty-four (24) hour emergency response phone number specified in D4.2.
 - (iv) the Safe Work Plan specified in D8;

- (v) evidence of the insurance specified in D9;
 - (vi) the performance security specified in D10;
 - (vii) the subcontractor list specified in D11;
 - (viii) the detailed work schedule specified in D12; and
- (b) the Contractor has attended a pre-construction meeting with the Contract Administrator, or the Contract Administrator has waived the requirement for a pre-construction meeting.

D13.3 The Contractor shall commence the Work on the Site within seven (7) Working Days of receipt of the letter of intent.

D14. RESTRICTED WORK HOURS

D14.1 Further to clause 3.10 of CW 1130, the Contractor shall require written permission forty-eight (48) hours in advance from the Contract Administrator for any work to be performed between 2000 hours and 0700 hours, or on Saturdays, Sundays, Statutory Holidays and or Civic Holidays.

D15. WORK BY OTHERS

- D15.1 Work by others on or near the Site will include but not necessarily be limited to:
- (a) City of Winnipeg Traffic Services Department – Replace signage and painting lines.
 - (b) City of Winnipeg Parking Authority – Will remove the existing parking metres prior to commencement of construction. They will require one weeks notice.

D16. SUBSTANTIAL PERFORMANCE

- D16.1 The Contractor shall achieve Substantial Performance by October 15, 2010.
- D16.2 When the Contractor considers the Work to be substantially performed, the Contractor shall arrange, attend and assist in the inspection of the Work with the Contract Administrator for purposes of verifying Substantial Performance. Any defects or deficiencies in the Work noted during that inspection shall be remedied by the Contractor at the earliest possible instance and the Contract Administrator notified so that the Work can be re-inspected.
- D16.3 The date on which the Work has been certified by the Contract Administrator as being substantially performed to the requirements of the Contract through the issue of a certificate of Substantial Performance is the date on which Substantial Performance has been achieved.

D17. TOTAL PERFORMANCE

- D17.1 The Contractor shall achieve Total Performance by October 20, 2010.
- D17.2 When the Contractor or the Contract Administrator considers the Work to be totally performed, the Contractor shall arrange, attend and assist in the inspection of the Work with the Contract Administrator for purposes of verifying Total Performance. Any defects or deficiencies in the Work noted during that inspection shall be remedied by the Contractor at the earliest possible instance and the Contract Administrator notified so that the Work can be re-inspected.
- D17.3 The date on which the Work has been certified by the Contract Administrator as being totally performed to the requirements of the Contract through the issue of a certificate of Total Performance is the date on which Total Performance has been achieved.

D18. LIQUIDATED DAMAGES

- D18.1 If the Contractor fails to achieve Substantial Performance or Total Performance in accordance with the Contract by the days fixed herein for same, the Contractor shall pay the City the

following amounts per Working Day for each and every Working Day following the days fixed herein for same during which such failure continues:

- (a) Substantial Performance – Two Thousand dollars (\$2,000.00);
- (b) Total Performance – One Thousand dollars (\$1000.00).

D18.2 The amounts specified for liquidated damages in D18.1 are based on a genuine pre-estimate of the City's losses in the event that the Contractor does not achieve Substantial Performance or Total Performance by the days fixed herein for same.

D18.3 The City may reduce any payment to the Contractor by the amount of any liquidated damages assessed.

D19. SCHEDULED MAINTENANCE

D19.1 The Contractor shall perform the following scheduled maintenance in the manner and within the time periods required by the Specifications:

- (a) Maintenance of Sodding as specified in CW3510;

D19.2 Determination of Substantial Performance and Total Performance shall be exclusive of scheduled maintenance identified herein. All scheduled maintenance shall be completed prior to the expiration of the warranty period. Where the scheduled maintenance cannot be completed during the warranty period, the warranty period shall be extended for such period of time as it takes the Contractor to complete the scheduled maintenance.

CONTROL OF WORK

D20. JOB MEETINGS

D20.1 Regular weekly job meetings will be held at Site. These meetings shall be attended by a minimum of one representative of the Contract Administrator, the City and one representative of the Contractor. Each representative shall be a responsible person capable of expressing the position of the Contract Administrator, the City and the Contractor respectively on any matter discussed at the meeting including the Work schedule and the need to make any revisions to the Work schedule. The progress of the Work will be reviewed at each of these meetings.

D20.2 The Contract Administrator reserves the right to cancel any job meeting or call additional job meetings whenever he deems it necessary.

D21. PRIME CONTRACTOR – THE WORKPLACE SAFETY AND HEALTH ACT (MANITOBA)

D21.1 Further to C6.24, the Contractor shall be the Prime Contractor and shall serve as, and have the duties of the Prime Contractor in accordance with The Workplace Safety and Health Act (Manitoba).

WARRANTY

D22. WARRANTY

D22.1 Notwithstanding C13.2, the warranty period shall begin on the date of Substantial Performance and shall expire one (1) year thereafter unless extended pursuant to C13.2.1 or C13.2.2, in which case it shall expire when provided for thereunder.

FORM H1: PERFORMANCE BOND
(See D10)

KNOW ALL MEN BY THESE PRESENTS THAT

_____ ,
(hereinafter called the "Principal"), and

_____ ,
(hereinafter called the "Surety"), are held and firmly bound unto **THE CITY OF WINNIPEG** (hereinafter called the "Obligee"), in the sum of

_____ dollars (\$_____)

of lawful money of Canada to be paid to the Obligee, or its successors or assigns, for the payment of which sum the Principal and the Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS the Principal has entered into a written contract with the Obligee for

BID OPPORTUNITY NO. 533-2010

2010 ACTIVE TRANSPORTATION INFRASTRUCTURE STIMULUS PROGRAM – ASSINIBOINE AVENUE: KENNEDY STREET TO MAIN STREET – BIKE BOULEVARD which is by reference made part hereof and is hereinafter referred to as the "Contract".

NOW THEREFORE the condition of the above obligation is such that if the Principal shall:

- (a) carry out and perform the Contract and every part thereof in the manner and within the times set forth in the Contract and in accordance with the terms and conditions specified in the Contract;
- (b) perform the Work in a good, proper, workmanlike manner;
- (c) make all the payments whether to the Obligee or to others as therein provided;
- (d) in every other respect comply with the conditions and perform the covenants contained in the Contract; and
- (e) indemnify and save harmless the Obligee against and from all loss, costs, damages, claims, and demands of every description as set forth in the Contract, and from all penalties, assessments, claims, actions for loss, damages or compensation whether arising under "The Workers Compensation Act", or any other Act or otherwise arising out of or in any way connected with the performance or non-performance of the Contract or any part thereof during the term of the Contract and the warranty period provided for therein;

THEN THIS OBLIGATION SHALL BE VOID, but otherwise shall remain in full force and effect. The Surety shall not, however, be liable for a greater sum than the sum specified above.

AND IT IS HEREBY DECLARED AND AGREED that the Surety shall be liable as Principal, and that nothing of any kind or matter whatsoever that will not discharge the Principal shall operate as a discharge or release of liability of the Surety, any law or usage relating to the liability of Sureties to the contrary notwithstanding.

IN WITNESS WHEREOF the Principal and Surety have signed and sealed this bond the

_____ day of _____, 20____.

SIGNED AND SEALED
in the presence of:

(Witness as to Principal if no seal)

(Name of Principal)

Per: _____ (Seal)

Per: _____

(Name of Surety)

By: _____ (Seal)
(Attorney-in-Fact)

All demands for payment shall specifically state that they are drawn under this Standby Letter of Credit.

Subject to the condition hereinafter set forth, this Standby Letter of Credit will expire on

(Date)

It is a condition of this Standby Letter of Credit that it shall be deemed to be automatically extended from year to year without amendment from the present or any future expiry date, unless at least 30 days prior to the present or any future expiry date, we notify you in writing that we elect not to consider this Standby Letter of Credit to be renewable for any additional period.

This Standby Letter of Credit may not be revoked or amended without your prior written approval.

This credit is subject to the Uniform Customs and Practice for Documentary Credit (1993 Revision), International Chamber of Commerce Publication Number 500.

(Name of bank or financial institution)

Per: _____
(Authorized Signing Officer)

Per: _____
(Authorized Signing Officer)

FORM J: SUBCONTRACTOR LIST
(See D11)

2010 ACTIVE TRANSPORTATION INFRASTRUCTURE STIMULUS PROGRAM – ASSINIBOINE
AVENUE: KENNEDY STREET TO MAIN STREET – BIKE BOULEVARD

<u>Portion of the Work</u>	<u>Name</u>	<u>Address</u>
SURFACE WORKS:		
<i>Supply of Materials:</i>		
Sub base and Base Course		
Concrete		
Asphalt		
Detectable Warning Tiles		
Separation/Reinforcement Geotextile		
Paving Stones		
<i>Installation/Placement:</i>		
Pavement Removal/Excavation		
Sub base Base Course		
Concrete		
Asphalt		
Topsoil / Sod		
Detectable Warning Tiles		
Paving Stones		
UNDERGROUND WORKS:		
<i>Supply of Materials:</i>		
Catch Basins		
<i>Installation/Placement:</i>		
Catch Basins		

PART E - SPECIFICATIONS

GENERAL

E1. APPLICABLE SPECIFICATIONS AND DRAWINGS

- E1.1 These Specifications shall apply to the Work.
- E1.2 *The City of Winnipeg Standard Construction Specifications* in its entirety, whether or not specifically listed on Form B: Prices, shall apply to the Work.
- E1.2.1 *The City of Winnipeg Standard Construction Specifications* is available on the Information Connection page at The City of Winnipeg, Corporate Finance, Materials Management Division website at <http://www.winnipeg.ca/matmgt/Spec/Default.stm>
- E1.2.2 The version in effect three (3) Business Days before the Submission Deadline shall apply.
- E1.2.3 Further to C2.4(d), Specifications included in the Bid Opportunity shall govern over *The City of Winnipeg Standard Construction Specifications*.
- E1.3 The following are applicable to the Work:

<u>Drawing No.</u>	<u>Drawing Name/Title</u>	<u>Drawing (Original) Sheet Size</u>
P-3315-0	Cover Sheet	A1
P-3315-1	Assiniboine Avenue – Kennedy Street to Edmonton Street	A1
P-3315-2	Assiniboine Avenue –Edmonton Street to Carlton Street	A1
P-3315-3	Assiniboine Avenue – Carlton Street to Hargrave Street	A1
P-3315-4	Assiniboine Avenue – Hargrave Street to Midtown Bridge	A1
P-3315-5	Assiniboine Avenue – Midtown Bridge to Navy Way	A1
P-3315-6	Assiniboine Avenue – Navy Way to Garry Street	A1
P-3315-7	Assiniboine Avenue – Garry Street to Fort Street	A1
P-3315-8	Assiniboine Avenue – Fort Street to Main Street	A1
P-3315-9	Assiniboine Avenue – Kennedy Street to Main Street – Planting Plan	A1
P-3315-10	Assiniboine Avenue – Kennedy Street to Main Street – Planting Plan	A1
P-3315-11	Assiniboine Avenue – Kennedy Street to Main Street – Planting Plan	A1

E2. PROTECTION OF EXISTING TREES

- E2.1 The Contractor shall take the following precautionary steps to prevent damage from construction activities to existing boulevard trees within the limits of the construction area:
- The Contractor shall not stockpile materials and soil or park vehicles and equipment on boulevards within 2 metres of trees.
 - Trees identified to be at risk by the Contract Administrator are to be strapped with 25 x 100 x 2400mm wood planks, or suitably protected as approved by the Contract Administrator.
 - Excavation shall be performed in a manner that minimizes damage to the existing root systems. Where possible, excavation shall be carried out such that the edge of the excavation shall be a minimum of 1.5 times the diameter (measured in inches), with the outcome read in feet, from the closest edge of the trunk. Where roots must be cut to facilitate excavation, they shall be pruned neatly at the face of excavation.
 - Operation of equipment within the dripline of the trees shall be kept to the minimum required to perform the work required. Equipment shall not be parked, repaired, refuelled;

construction materials shall not be stored, and earth materials shall not be stockpiled within the driplines of trees. The dripline of a tree shall be considered to be the ground surface directly beneath the tips of its outermost branches. The Contractor shall ensure that the operations do not cause flooding or sediment deposition on areas where trees are located.

- (e) Work on-site shall be carried out in such a manner so as to minimize damage to existing tree branches. Where damage to branches does occur, they shall be neatly pruned.

E2.2 All damage to existing trees caused by the Contractor's activities shall be repaired to the requirements and satisfaction of the Contract Administrator and the City Forester or his designate.

E2.3 No separate measurement or payment will be made for the protection of trees.

E2.4 Except as required in clause E2.1(c) and E2.1(e), Elm trees shall not be pruned at any time between April 1 and July 31.

E3. TRAFFIC CONTROL

E3.1 Further to clauses 3.6 and 3.7 of CW 1130:

- (a) Where directed, the Contractor shall construct and maintain temporary asphalt ramps to alleviate vertical pavement obstructions such as manholes and planing drop-offs to the satisfaction of the Contract Administrator. Payment shall be in accordance with CW3410.
- (b) In accordance with the Manual of Temporary Traffic Control in Work Areas on City Streets, the Contractor ("Agency" in the manual) shall make arrangements with the Traffic Services Branch of the City of Winnipeg to place all temporary regulatory signs. The Contractor shall bear all costs associated with the placement of temporary traffic control devices by the Traffic Services Branch of the City of Winnipeg in connection with the works undertaken by the Contractor.

E4. TRAFFIC MANAGEMENT

E4.1 Further to clause 3.7 of CW 1130:

E4.1.1 During construction Assiniboine Avenue will be converted to one way traffic as it shows on the drawings. City of Winnipeg Traffic Services will be assisting with the traffic management.

E4.1.2 Public Parking on the street will be prohibited during construction.

E4.1.3 Intersecting street and private approach access shall be maintained at all times.

E4.1.4 Should the Contractor be unable to maintain pedestrian or vehicular access to a residence or business, he shall review the planned disruption with the business or residence and the Contract Administrator, and take reasonable measures to minimize the impact. The Contractor shall provide a minimum of 24 hours notification to the affected residence or business and the Contract Administrator, prior to disruption of access.

E4.1.5 Pedestrian and ambulance/emergency vehicle access must be maintained at all times.

E5. PEDESTRIAN AND CYCLIST SAFETY

E5.1 During the project, the sidewalk on the constructing side will be closed as required.

E5.2 The Contractor shall maintain all designated and signed crosswalks during construction.

E5.3 During the project the Contractor shall be responsible for maintaining safe pedestrian access including detours.

E6. WATER OBTAINED FROM THE CITY

- E6.1 Further to clause 3.7 of CW 1120, the Contractor shall pay for all costs, including sewer charges, associated with obtaining water from the City in accordance with the Waterworks and Sewer By-laws.

E7. TREE REMOVAL

DESCRIPTION

E7.1 General

- E7.1.1 This Special Provision shall amend the City of Winnipeg Standard Construction Specification CW 3010-R4 "Clearing and Grubbing", and shall cover the removal of trees as specified on the Contract Drawings.

CONSTRUCTION METHODS

E7.2 General

- E7.2.1 Remove Trees in accordance with CW 3010-R4.

MEASUREMENT AND PAYMENT

E7.3 Tree Removal

- E7.3.1 Tree removal will be measured on a unit basis. The Contractor will be paid according to the total number of trees removed within the limits of the work and approved by the Contract Administrator.
- E7.3.2 The removal of trees shall be paid for at the Contract Unit Price per tree for "Tree Removal", measured as specified herein, which price shall be payment in full for performing all operations herein described and all other items incidental to the work included in this Specification.

E8. RECYCLED CONCRETE BASE COURSE MATERIAL

DESCRIPTION

E8.1 General

- E8.1.1 Further to CW 3110, this specification covers recycled concrete as base course material.

E8.2 Definitions

- E8.2.1 Deleterious material – are materials such as vegetation, organic material, wood, glass, plastic, metal, reinforcing steel, building rubble, brick, salvaged asphalt materials, clay, shale, and friable particles.

E8.3 Referenced Standard Construction Specifications

- (a) CW 3110 – Sub-Grade, Sub-Base, and Base Course Construction

MATERIALS

E8.4 Recycled Concrete Base Course Material

- E8.4.1 Recycled concrete base course material must meet the approval of the Contract Administrator.
- E8.4.2 Recycled concrete base course material will consist of sound durable particles produced by crushing, screening, and grading of recovered concrete materials, free from soft material that would disintegrate through decay or weathering.

E8.4.3 Recycled concrete base course material will be well graded and conform to the following grading requirements:

Recycled Concrete Base Course Material Grading Requirements

CANADIAN METRIC SIEVE SIZE	PERCENT OF TOTAL DRY WEIGHT PASSING EACH SIEVE
20 000	100%
5 000	40% - 70%
2 500	25% - 60%
315	8% - 25%
80	6% - 17%

E8.4.4 Recycled concrete base course material when subjected to the abrasion test will have a loss of not more than 35% when tested in accordance with grading B of ASTM C131, Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine.

E8.4.5 The amount of deleterious material will be limited to a maximum of two percent of the total dry weight.

CONSTRUCTION METHODS

E8.5 Placement of Recycled Concrete Base Course Material

E8.5.1 Spread materials uniformly to avoid segregation free of pockets of fine and coarse material.

E8.5.2 Place and compact recycled concrete base course material to a minimum 75millimetres in thickness for pavement, approaches and asphalt pathways to a minimum of 100% Standard Proctor Density for the full width of the excavation unless otherwise shown on the Drawings or as directed by the Contract Administrator.

E8.5.3 Maintain the finished material until the hard surfacing is placed.

MEASUREMENT AND PAYMENT

E8.6 Recycled Concrete Base Course Material

E8.6.1 Recycled concrete base course material will be paid as Base Course Material in accordance with CW 3110.

E9. 100 MM CONCRETE SIDEWALK WITH PAVING STONE, AND BRICK INSET

E9.1 Further to Specification CW 3325 the Contractor shall construct the proposed concrete sidewalk with block-outs (for paving stone and brick) with a minimum 100 mm depth of Concrete as shown on the Drawings. The "block-outs" shall be constructed utilizing forming techniques capable of accommodating the proposed paving stone and brick paving to the dimensions and tolerances as shown on the Drawings and as confirmed with paving stone and brick manufacturer.

E9.2 The concrete sidewalk shall be poured such that the block-outs and remaining sidewalk act as a monolithic section.

E9.3 All costs in connection with the additional forming and placement of concrete as a result of the "block-outs", and additional depths in areas as shown on the Drawing are incidental and shall be included in the unit price bid for "100 mm Concrete Sidewalk c/w reveal for paving band". Minimum 75mm depth compacted granular levelling course shall be included in unit price bid for "100 mm Concrete Sidewalk c/w reveal for paving band".

E9.4 Sidewalk to be poured adjacent to transformer pits, areaways and buildings with approved bond breaker. Cost of bond breaker and shall be included in the unit price bid for "100 mm Concrete Sidewalk c/w reveal for paving band".

E9.5 All saw cutting required and shall be included in the unit price bid for "100 mm Concrete Sidewalk c/w reveal for paving band". All sawcut joints shall be laid out on Site for review and approval by Contract Administrator prior to construction. All sawcutting to City of Winnipeg Specifications.

E10. BOULEVARD RESTORATION

E10.1 Any excess damage to the boulevard areas caused by the Contractor, his employees and equipment shall be restored by replacing with original material at the Contractor's expense to the satisfaction of the Contract Administrator.

E11. REMOVAL OF EXISTING DECORATIVE FENCE

DESCRIPTION

E11.1 General

E11.1.1 The Work to be done by the Contractor under this Specification shall include the furnishing of all superintendence, overhead, labour, materials, equipment, tools, supplies and all other things necessary or and incidental to the satisfactory performance and completion of all Work as hereinafter specified.

CONSTRUCTION METHODS

E11.2 The Contractor shall carefully remove and salvage all decorative features associated with fence that is identified by the Contract Administrator and deliver the materials to the City of Winnipeg.

E11.3 The Contract Administrator shall identify the delivery location at the preconstruction meeting.

MEASUREMENT AND PAYMENT

E11.4 Removal of Existing Decorative Fence

E11.4.1 Removal of the existing decorative fence will be measured on a lump sum basis.

E11.4.2 The removal of the decorative fence shall be paid for at the Contract Unit Price per tree for "Removal of Existing Decorative Fence", measured as specified herein, which price shall be payment in full for performing all operations herein described and all other items incidental to the work included in this Specification.

E12. SIGN SUPPORT CLAMPS

E12.1 The Contractor shall install all new sign support clamps at the locations as shown on the Drawings or as directed by the Contract Administrator. The City shall supply all sign support clamps and parking meter poles.

E12.2 All costs in connection with the installation of sign support clamps are incidental.

E13. INTERLOCKING PAVING STONES

DESCRIPTION

E13.1 Further to CW 3335 this Specification shall cover the:

- (a) supply and installation of interlocking paving stones (unit pavers),
- (b) supply and installation of sand setting bed,

E13.2 The Work to be done by the Contractor under this Specification shall include the furnishing of all superintendence, overhead, labour, materials, equipment, tools, supplies and all other things necessary or and incidental to the satisfactory performance and completion of all Work as hereinafter specified.

MATERIALS

E13.3 Clay and Concrete Pavers

- (a) Half Holland Charcoal 105mm x 210mm
- (b) Holland Square Tan 210mm x 210mm

E13.3.1 The pavers shall match those existing on Site at the south west corner of Main Street and Assiniboine Avenue.

E13.4 Sand:

- (a) Clean brick sand as joint filler.
- (b) Clean brick sand as minimum 13mm depth setting bed

CONSTRUCTION METHODS

E13.5 Interlocking paving stones shall be installed in block out in concrete sidewalk as per the Drawings.

INSTALLATION

E13.6 Contractor to install stockpiled pavers prior to supply and installation of new pavers.

E13.7 Install sand setting bed for pavers on granular base as shown on the Drawings.

E13.8 Contractor to verify the exact dimensions of pavers and panels prior to construction of block outs in concrete sidewalk.

- (a) Install concrete sidewalk as specified on Drawings.
- (b) Install sand bed to minimum 13mm depth as specified on Drawings. Adjust depth of pavers under areas to be relevelled to ensure surface of pavers is flush with adjacent paving.
- (c) Do not compact setting bed prior to installation of pavers.
- (d) Spread only sufficient area which can be covered with pavers same day.
- (e) Lay pavers on sand bed hand tight.
- (f) In areas where pavers are to be grouted in place clean existing concrete, install grout bed and then place pavers on grout.
- (g) Grout between pavers as required to ensure stability.
- (h) Remove adjacent pavers in bands as required to ensure that bricks do not require cutting on straight bands.
- (i) Where paving pattern is interrupted by vertical structural elements pavers must be sawcut and fit true and hand tight.
- (j) Commence installation of pavers against edge to obtain straightest possible course for installation.
- (k) Pavers shall be cut with a saw only, to obtain true even undamaged edges. Chipped pavers are unacceptable.
- (l) Crews shall Work on installed pavers, not on sand layer.
- (m) Spread and fine grade brick sand over paving surface and sweep into joints, in several directions. Sand is included in the price for supply and installation of pavers.
- (n) Compact pavers with vibratory plate compactor having mass of at least 113kg. Compaction is incidental to the price for supply and installation of paving stone.
- (o) Sweep remaining sand over all paving areas and remove from Site.

- (p) Replace at no extra cost all whole or cut stones marked as unacceptable.
- (q) Remove cracked, chipped, broken or otherwise damaged paving materials from Site immediately.
- (r) Upon completion, clean in accordance with manufacturer's recommendations.

METHOD OF MEASUREMENT

- E13.9 Supply and installation of interlocking paving stones will be measured on a surface area basis. The surface area to be paid for shall be the total number of square metres installed in accordance with the Drawings and Specifications and accepted by the Contract Administrator, as computed from measurements made by the Contract Administrator.

BASIS OF PAYMENT

- E13.10 Supply and installation of interlocking paving stones will be paid for at the Contract Unit Price per square metre for "Interlocking paving stones" measured as specified herein, which price shall be payment in full for supplying all materials and performing all operations herein described and all other items incidental to the Work included in this Specification.

E14. COLOURED CONCRETE

DESCRIPTION

- E14.1 Further to CW 3310 this Specification shall cover the:
- (a) Colour of the concrete to be placed at locations identified on the Contract Drawings.
- E14.2 The Work to be done by the Contractor under this Specification shall include the furnishing of all superintendence, overhead, labour, materials, equipment, tools, supplies and all other things necessary or and incidental to the satisfactory performance and completion of all Work as hereinafter specified.

MATERIALS

- E14.3 The colour shall be Lafarge Artevia Premium Red.

CONSTRUCTION METHODS

- E14.4 The Contractor shall follow CW 3310 and shall follow the Concrete Supplier's recommended installation, finishing and handling instructions.
- E14.5 The Contractor is responsible for replacing and the cost of replacing and concrete that is vandalized or disturbed while the concrete is wet after it has been placed.

MEASUREMENT AND PAYMENT

- E14.6 The construction of coloured concrete shall be paid for at the Contract Unit Price per metre squared for "Construction of 200 mm Concrete Pavement (Reinforced) - Coloured", measured as specified herein, which price shall be payment in full for performing all operations herein described and all other items incidental to the work included in this Specification.

E15. TREES

E15.1 Description

- E15.1.1 The Work to be done by the Contractor under this Specification shall include the furnishing of all superintendence, overhead, labour, materials, equipment, tools, supplies and all other things necessary for and incidental to the satisfactory performance and completion of all Work as shown on the Drawings and as hereinafter specified, including, but not necessarily confined to the following:
- (a) Supply and Installation of trees.

E15.1.2 Reference

- (a) Install trees in accordance with the Canadian Standards for Nursery Stock Current Edition, published by the Canadian Nursery Trades Association, except where specified otherwise.

E15.1.3 Source Quality Control

- (a) All plant material shall be randomly inspected at the source upon request of the Contract Administrator.
- (b) Trees are to be grown in nurseries under proper cultural practices as recommended by the Canadian Nursery Trades Association.
- (c) Only those trees that have been grown for at least the four (4) previous years in local Manitoba nurseries located in an Agriculture Canada Plant Hardiness Zone designation of 2(a or b) or 3(a or b) and within a 250 kilometre radius of Winnipeg, will be accepted. Trees that have grown in plant hardiness zones 1 and 4 or greater will be rejected.

E15.1.4 Maintenance

- (a) The Contractor shall be responsible for the maintenance of the trees for a period of one (1) year from the date of Substantial Performance. Any areas planted after September 15th, the maintenance period will commence on May 15th of the following year or such date as mutually agreed upon by all parties.
- (b) Water to ensure soil moisture conditions for optimum growth and health of plant material. Ensure watering techniques do not cause erosion.
- (c) Reform damaged watering saucers.
- (d) Remove weeds bi-monthly.
- (e) Replace or re-spread damaged, missing or disturbed mulch.
- (f) For non-mulched areas, cultivate monthly to keep top layer of soil friable.
- (g) If required to control insects, fungus and disease, use appropriate control methods in accordance with Federal, Provincial and Municipal regulations. Obtain product approval from Contract Administrator prior to application.
- (h) Apply fertilizer as directed by manufacturer's specifications.
- (i) Remove dead, broken or hazardous branches from plant material.
- (j) Keep trunk protection and tree supports in proper repair and adjustment.
- (k) Remove trunk protection, tree supports and level watering saucers at end of warranty period.
- (l) Remove and replace dead plants and plants not in healthy growing condition. Make replacements in same manner as specified for original plantings.
- (m) Submit monthly written reports to Contract Administrator identifying:
 - (i) Maintenance work carried out.
 - (ii) Development and condition of plant material.
 - (iii) Preventative or corrective measures required which are outside Contractor's responsibility.

E15.1.5 Warranty

- (a) The Contractor shall, at his/her expense, warrant the Work against any and all defects or deficiencies resulting from insect infestation, disease and mechanical damage due to improper handling, installation or maintenance, for a period of two (2) years for trees from the date of the Total Performance. Nursery stock damaged by vandalism or reasons beyond the control of the Contractor shall be replaced by the client.
- (b) End-of-Warranty inspection will be conducted by the Contract Administrator.

- (c) The Contract Administrator reserves the right to request material replacement or extend the Contractor's Maintenance responsibilities for an additional one (1) year if, at the end of the Warranty Period, leaf development and growth are not sufficient to ensure future survival of the plant material.

E15.1.6 Replacements

- (a) During the Maintenance Period, the Contractor shall remove from Site any plant material that has died or failed to grow satisfactorily as determined by the Contract Administrator and replace as per Specifications within a maximum ten (10) day period from notification.
- (b) Defective plants shall be replaced within three (3) days of notification to the Contractor.
- (c) The Contractor shall extend Maintenance and Warranty on replacement tree for a period equal to the original Maintenance and Warranty Periods.
- (d) The Contractor shall continue such replacement, Maintenance and Warranty until tree is acceptable.

E15.2 Materials

E15.2.1 Miscellaneous Materials

- (a) Water shall be potable and free of minerals which may be detrimental to plant growth.
- (b) Stakes shall be metal T-Bar, steel, 40x40x5x2440mm.
- (c) Guying Wire shall be 3mm diameter multi-strand galvanized steel cable.
- (d) Guying Collar shall be plastic tube, 13mm diameter, nylon reinforced.
- (e) Trunk Protection shall be plastic perforated spiraled strip.
- (f) Fertilizer shall be a slow release formulation of low nitrogen and high phosphorus e.g. 10-50-12. Apply quantities at rates stated by product manufacturer.
- (g) Planting Soil for the planting of boulevard trees shall consist of black top soil, a fertile friable natural loam containing not less than 4% of organic matter for clay loams and not less than 2% for sandy loams, with an acidity value ranging from ph 6.0 to 8.0 and capable of sustaining vigorous plant growth. It shall be free of any mixture of subsoil or clay lumps and free of stones and roots over 50mm in diameter and other extraneous matter. It shall not contain couch or crab grass rhizomes.
- (h) Root Ball Burlap shall be 150 g Hessian burlap, biodegradable.
- (i) Wire Baskets shall be horticultural accepted product designed to carry the weight and to contain a burlap-covered root ball. Minimum diameter basket size is to conform to the same minimum diameter of the tree root ball for the respective minimum tree caliper sizes.

E15.2.2 Plant Material

- (a) Nomenclature of specified trees is to conform to the International Code of Nomenclature for Cultivated Plants and is to be in accordance with the approved scientific names given in the latest edition of the Standardized Plant Names.
- (b) Trees are to be characteristically developed for their species and structurally sound, well branched, healthy and vigorous and densely foliated when in leaf. The tree is to have a healthy, well developed, fibrous root system which may be verified through a testing procedure that destructively samples one or more randomly selected root balls.
- (c) Trees are to have been root pruned regularly, but not later than one growing season prior to arrival on Site. The Contractor may be required to furnish documentation to the client on their root-pruning program. Trees in excess of 75mm caliper are to have been half root pruned during each of two successive growing seasons, the latter at least, one growing season prior to arrival on Site.

- (d) All parts of the trees, especially the lower branches, are to be moist and show live, green cambium tissue when cut.
- (e) Trees are to have only one, sturdy, reasonably straight and vertical trunk, and a well balanced crown with fully developed leader.
- (f) Trees are to be free of disease, insect infestation, rodent damage, sun scald, frost cracks, abrasions, unhealed scars, scars exceeding 5cm in diameter, major forks or crooks in the trunk, broken branches, or angled leaders. Trees having the above defects will not be accepted by the Contract Administrator.
- (g) Trees having a leader which has developed at a sharp angle to the trunk as a result of pruning or trunk damage will not be accepted.
- (h) Trees exhibiting suppressed, weakly developed branches due to competition from other closely spaced trees in the nursery will not be accepted. Trees exhibiting dead branches will not be accepted.
- (i) Any tree that has come out of dormant stage and is too far advanced will not be accepted unless prior approval obtained. Approval is required for any tree which has been held in cold storage.
- (j) Balled and burlapped trees in excess of a 3m height must have been dug with large firm ball. Roots in root balls must be comprised of 75% fibrous and feeder root systems. Secure root balls with burlap, heavy twine and rope. For trees 75mm or more in caliper, wrap ball in double layer of burlap and drum lace with minimum 10mm diameter rope. Protect root balls against sudden changes in temperature and exposure to heavy rainfall.
- (k) Tree spade dug trees are to be dug with mechanized digging equipment with hydraulic spade. Lift root ball from hole, place in wire basket designed for purpose and lined with burlap. Tie basket to ball with heavy rope. Take care not to injure trunk of tree with wire basket ties or rope.
- (l) Use of collected or native trees is not permitted.

E15.2.3 Tree Quantity and Size

- (a) Trees are to be planted at the quantities and caliper listed on the Plant Lists which are shown on the drawings. Any variation from the specified quantity is to be clearly identified on the Schedule of Prices. Any variations to species, size or caliper of specified trees will require a request for approval from the Contract Administrator.
- (b) Any changes in planting locations will be determined on-site by the Contract Administrator.
- (c) The Contractor shall supply trees as indicated in the Schedule of Prices and PLANT LISTS.
- (d) Trees are to conform to the measurements specified in the on drawing PLANT LISTS, except that trees larger than specified may be used if approved by the Contract Administrator.
- (e) Trees are to be measured when the branches are in their normal position. Height dimensions specified are to refer to the main body of the tree and not from branch tip to root base. Where trees have been measured by caliper or diameter, reference is to be made to the diameter of the trunk measured 15cm above the ground as the tree stands in the nursery prior to lifting. Caliper of tree shall be appropriately designed on a permanently fixed tag on one of the branches.

E15.2.4 Shipment and Pre-Planting Care

- (a) Coordinate shipping of trees and excavation of holes to ensure minimum time lapse between digging and planting.

- (b) Tie branches of trees securely, and protect trees against abrasion, exposure and extreme temperature change during transit. Avoid binding of trees with rope or wire which would damage bark, break branches or destroy natural shape of tree. Give full support to root ball of trees during lifting.
- (c) Cover tree foliage with tarpaulin, and protect bare roots by means of dampened straw, peat moss, saw dust or other acceptable material to prevent loss of moisture during transit and storage.
- (d) Remove broken and damaged roots with sharp pruning shears. Make clean cuts, and cover cuts over 10mm diameter with a tree wound dressing.
- (e) Keep roots moist and protected from sun and wind. Heel-in trees which cannot be planted immediately in shaded areas and water well.

E15.3 Construction Methods

E15.3.1 Workmanship

- (a) Location of trees will be staked out or painted on Site by the Contractor. Locations shall be approved by the Contract Administrator prior to installation.
- (b) Coordinate operations. Keep Site clean and planting holes drained. Immediately remove soil or debris spilled onto street pavement, grass or sidewalk.

E15.3.2 Planting Time

- (a) Plant deciduous trees during dormant period before buds have broken. Trees noted for spring planting only, must be planted in dormant period.
- (b) Plant only under conditions that are conducive to health and physical conditions of trees.
- (c) Provide planting schedule to Contract Administrator. Extending planting operations over long period using limited crew will not be accepted.
- (d) The Contractor must obtain all above and below ground clearances from all the utilities as well as the appropriate District Operations Branch in a timely manner so as not to jeopardize the schedule of the complete tree planting Contract.

E15.3.3 Excavation

- (a) Excavate planting pits as indicated by stakes or paint marks.
- (b) Tree pits shall be excavated in circular shape by back hoe (not tree spade) to a minimum of twice the width of the rootball. The sides of the tree pit to be scarified to the depth of one shovel blade
- (c) Protect bottom of excavations against freezing.
- (d) Remove water which enters excavations prior to planting. Ensure source of water is not ground water and notify Contract Administrator.

E15.3.4 Installation

- (a) Planting shall be done during periods of suitable weather conditions and in accordance with locally accepted practice.
- (b) Trees are to be planted within forty eight (48) hours of excavation from the nursery.
- (c) No tree pit is to be left open at the end of the Contractor's Work Day. Planting program is to be planned to ensure that all approved trees delivered to the Site at designated planting locations are installed and thoroughly watered the same day as delivery.
- (d) With balled and burlapped root balls and root balls in wire baskets, burlap shall be loosened and cut away from the top 1/3 without disturbing root ball. Wire shall be cut away and removed from the top 1/3 of the root ball. Burlap or rope shall not be pulled from under root ball. Non-biodegradable wrapping shall be removed.

- (e) After inserting the tree and tamping the root system with topsoil in layer of 150mm, water shall be poured in until the pit is thoroughly soaked. Filling of the hole shall then be completed and the fill-in soil shall be packed firmly around the roots, leaving a concave surface for convenient watering. After filling, the planting shall be watered at frequent intervals.
- (f) Each tree is to have an earth saucer at its base having a diameter as large as the excavation with a 10cm lip formed at the perimeter of the saucer to retain water.
- (g) All nursery stock shall be set plumb in the centre of pits and at levels as shown on the planting details after settlement has taken place.
- (h) Nursery stock shall be faced to give the best appearance or relationship to adjacent structure and to the approval of the The City of his representative. Trees shall be placed equal to depth they were originally growing in nursery.

E15.3.5 Fertilizing

- (a) When planting is completed, give surface of planting saucer dressing of fertilizer meeting the requirements of Specification. Mix fertilizer thoroughly with top layer of planting soil and water in well.

E15.3.6 Trunk Protection

- (a) Install trunk protection on trees as indicated.
- (b) Install trunk protection prior to installation of tree supports when used.

E15.3.7 Pruning

- (a) The Contractor shall provide a licensed Manitoba Certified Arborist for each work crew or work site.
- (b) Employ clean sharp tools and make cuts flush with branch collars. Remove dead and injured branches.

E15.3.8 Watering

- (a) Trees are to be watered during the planting procedure as described previously, and once a week thereafter, or more frequently if required, during the growing season.
- (b) A complete record is to be kept of each series of waterings for all planted trees noting: 1) location, and 2) date of watering. This record shall be sent bi-weekly to Scatliff+Miller+Murray Inc. - Fax: (204) 927-3443.
- (c) Apply 40 litres of water per 25mm caliper per application using deep root feeder or low/pressure nozzle and hose. The water stream must not gouge out a hole in the soil and mulch.

E15.4 Method of Measurement


- E15.4.1 Installation of trees shall be measured on a per unit basis. The amount to be paid for shall be the total number of trees, shrubs and perennials supplied and installed in accordance with this Specification and the Construction Drawings, and as acceptable to the Contract Administrator.

E15.5 Basis of Payment

- E15.5.1 Payment for Installation of trees, shrubs and perennials shall be paid for at the Contract Unit Prices for the "Items of Work" listed below. This price shall be payment in full for supplying all labour, equipment and materials, and performing all operations herein described and all other items incidental to the Work included in this Specification and accepted by the Contract Administrator.

Item of Work:

Deciduous Tree (c/w warranty and one year plant maintenance)

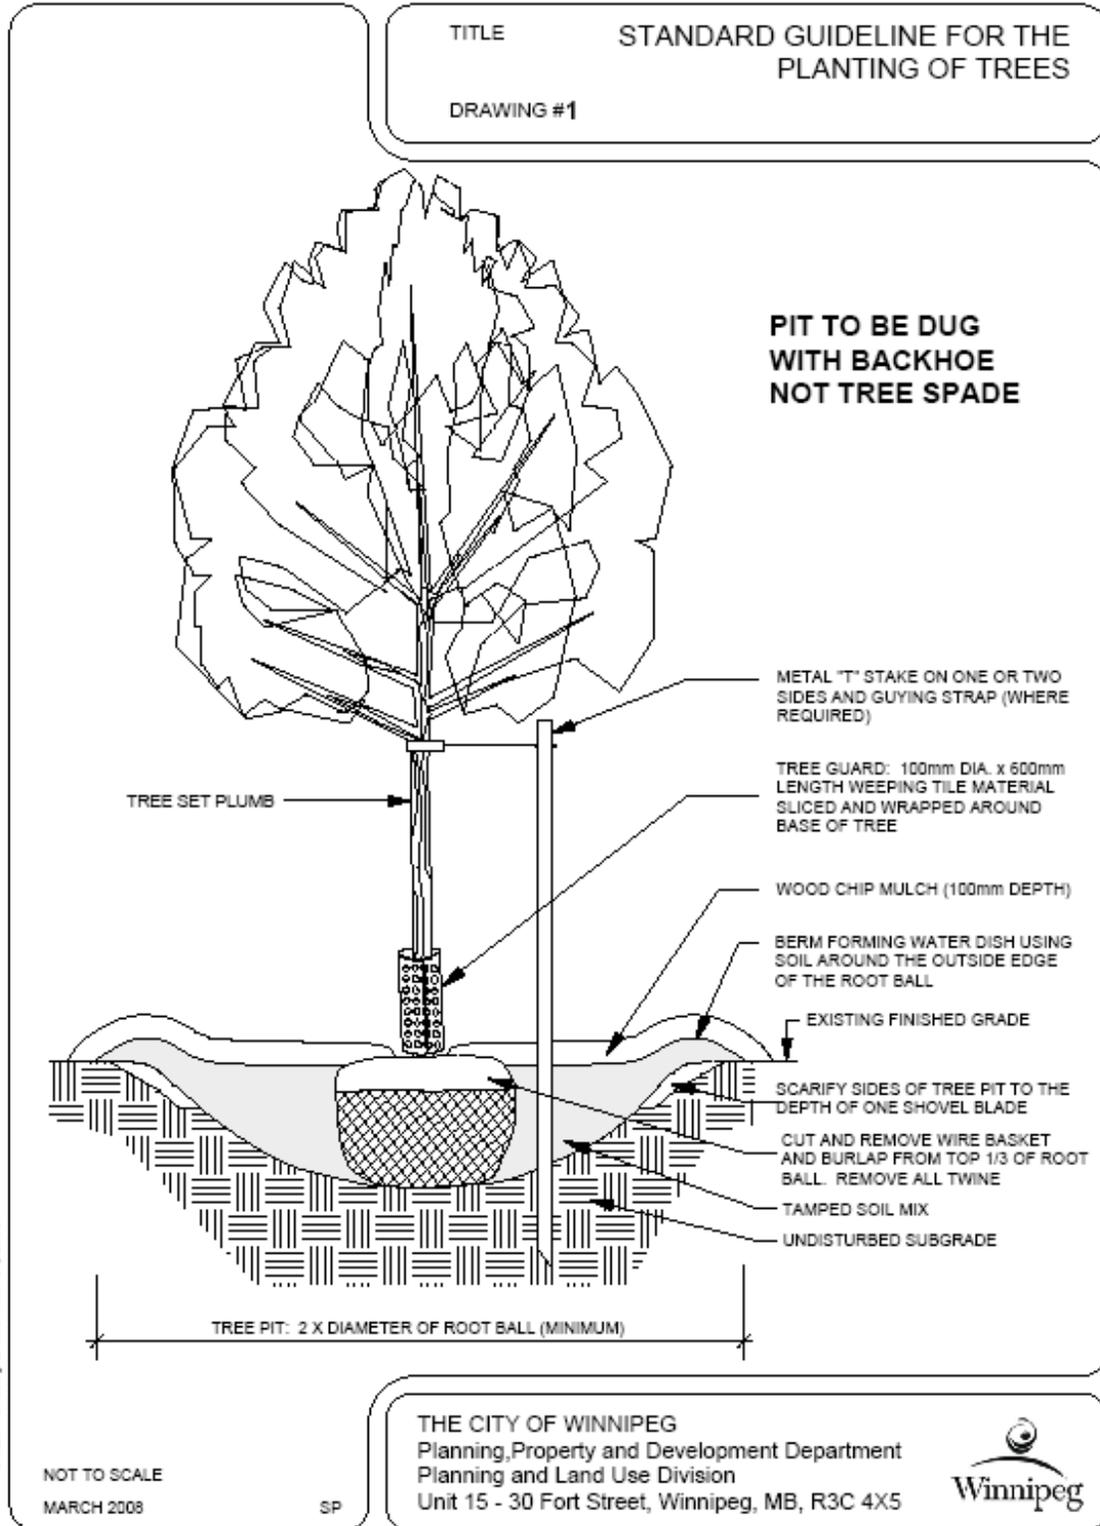

E16. SUPPLY AND INSTALL DETECTABLE WARNING SURFACE TILES

DESCRIPTION

- E16.1 This specification covers the supply and installation of detectable warning surface tiles in sidewalk ramps and multi-use path ramps.

SPECIFICATIONS AND DRAWINGS

- E16.2 Referenced Standard Construction Specifications and Standard Details

- (a) CW 3235 - Renewal of Existing Miscellaneous Concrete Slabs
- (b) CW 3240 - Renewal of Existing Curbs
- (c) CW 3310 - Portland Cement Concrete Pavement Works
- (d) CW 3325 - Portland Cement Concrete Sidewalk
- (e) SD-229C - Curb Ramp for Concrete Pavement
- (f) SD-229D - Curb Ramp for Asphalt Overlay

- E16.3 Attached; SDE Drawings and Installation Manual

- (a) SDE-229A - Curb Ramp Layout for Intersections
- (b) SDE-229AA - Detectable Warning Surface in Curb Ramps for Intersections
- (c) SDE-229AB - Curb Ramp Layout for Offset Intersections
- (d) SDE-229BB - Detectable Warning Surface in Curb Ramps for Medians
- (e) SDE-229E - Curb Ramp Depressed Curb
- (f) Manufacturer's Installation Manual – Armor-Tile Cast in Place Inline Dome Detectable/Tactile Warning Surface Tile.

MATERIALS

- E16.4 Acceptable Detectable Warning Surface Tile product is:

2'x 4' (610 x 1220mm) Armor-Tile Cast in Place (yellow).

Available from:

Engineered Plastics Inc.
1400 Cornwall Road Unit 6
Oakville, Ontario L6J 7W5

Attention: Manny Burgio
Ph: 800-682-2525
Fax: 800-769-4463

or

Alsip's Building Products
1 Cole Avenue
Winnipeg, Manitoba

Attention: Jason Alsip
Ph. 204-667-3330

- E16.4.1 Detectable warning surface tiles shall be Highway Yellow (USA) or Safety Yellow (Canada).
- E16.4.2 Detectable warning surface tiles shall be cast in place type.
- E16.4.3 Truncated domes on detectable warning surface tiles shall be in accordance with ADA Accessibility Guidelines (ADAAG).

CONSTRUCTION METHODS

E16.5 General

- E16.5.1 Construct curb ramps, sidewalk ramps and multi-use path in accordance with referenced Standard Construction Specifications, Standard Details, and SDE drawings (attached).
- E16.5.2 Construct the lip of the depressed curb in accordance with SDE-229E.
- E16.5.3 Construct sidewalk ramp grades in accordance with SD-229C and SD-229D.
- E16.5.4 Install the detectable warning surface tile in accordance with the amended Manufacturer's Installation Manual (attached). Drill additional 6mm air vent holes in ribs under the tile as required and use vibration to help seat the tile, to facilitate the installation process.
- E16.5.5 Trim the corner of the tile at radii in accordance with SDE-229A, SDE-229AA and SDE-228AB
- E16.5.6 Install and orient the detectable warning surface tiles as shown on the referenced drawings or as directed by the Contract Administrator.

E16.6 Medians and Refuge Islands:

- E16.6.1 Where the distance from back of curb to back of curb is 1.32m or greater, install one detectable warning surface tile 50mm from the back of each curb.
- E16.6.2 Where the distance from back of curb to back of curb is less than 1.32m, leaving 50mm between the back of curb and the tile, cut the tile(s) to fill the remaining area between the curbs.

E16.7 Multi-use Paths


- E16.7.1 Construct a curb ramp with a depressed curb to the full width of the multi-use path in accordance with SDE-229E.
- E16.7.2 Construct a concrete ramp the width of the multi-use path and a minimum of 1.50m deep from back of curb in accordance with SD-229C and SD-229D.
- E16.7.3 Install two (2) tiles in each concrete ramp, one (1) on each side for each direction. Place the short edge of each tile 150mm from the edge of the concrete ramp, with both tiles in line with each other transversely across the concrete ramp. The tile(s) nearest the curb must be 50mm from back of curb similar to tile placement in SDE-229A.
- E16.7.4 Saw cut the middle of the concrete slab, perpendicular to the curb and to a depth of D/4. Cut additional sawcuts as directed by the Contract Administrator.

MEASUREMENT AND PAYMENT

- E16.8 Supply and installation of detectable warning surface tiles will be measured on a unit basis and paid for at the Contract Unit Price for "Detectable Warning Surface Tiles". The number of units to be paid for will be the total number of full or trimmed tiles supplied and installed in accordance with this specification, accepted and measured by the Contract Administrator.
- E16.8.1 The area under the detectable warning surface tile is part of the concrete sidewalk ramp and will be paid in accordance with CW 3235 and CW 3325.

- E16.8.2 The concrete sidewalk ramp and the concrete ramp for multi-use paths will be paid as 100mm sidewalk in accordance with CW 3235 or CW 3325.
- E16.8.3 Curb ramp will be paid in accordance with CW 3240 or CW 3310.

DRAWINGS AND INSTALLATION MANUAL

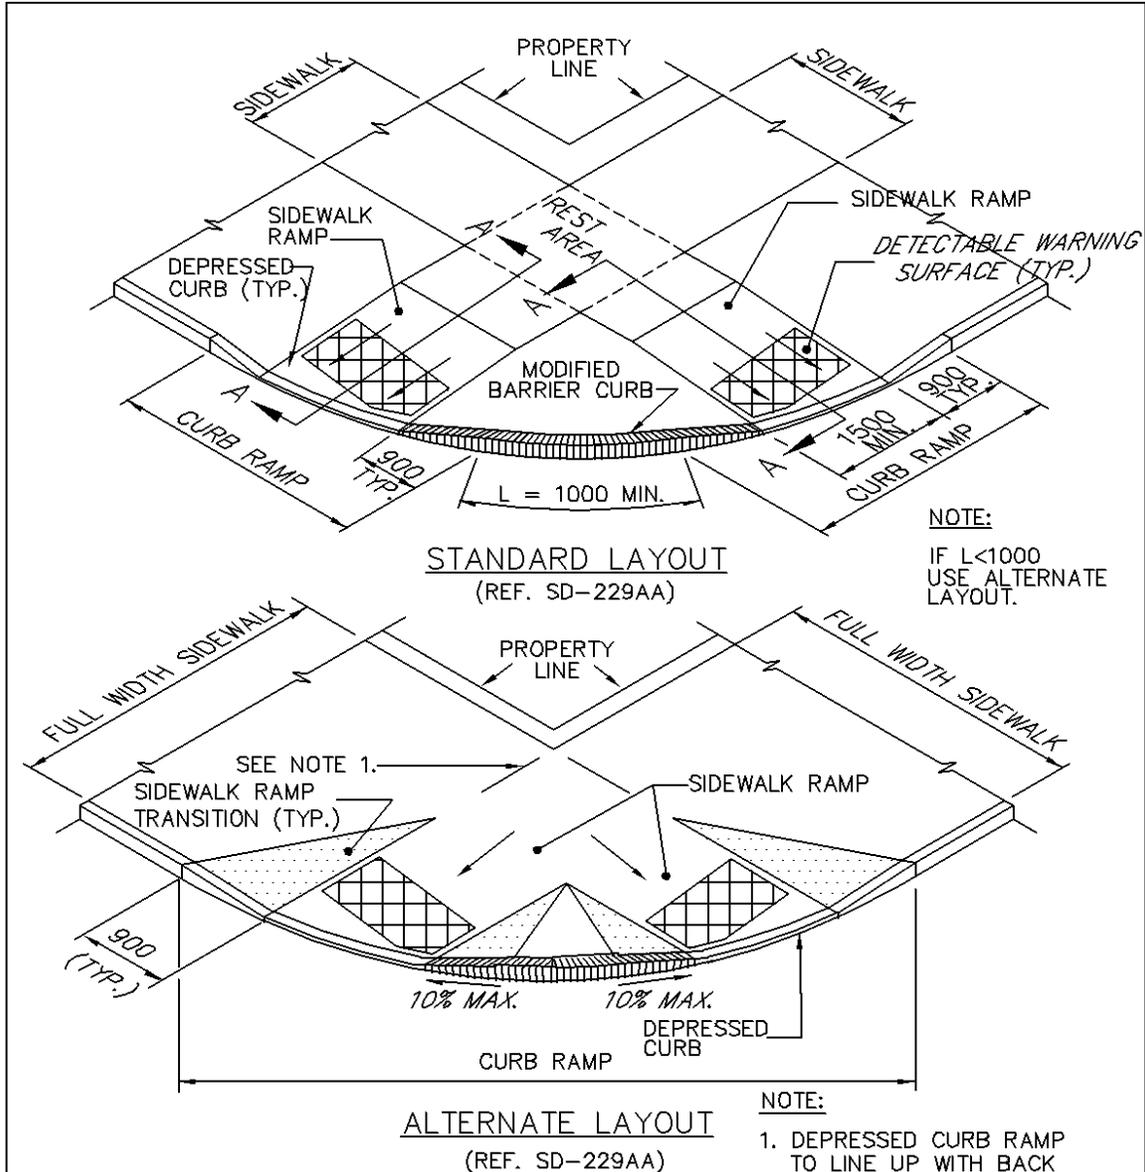


- NOTE:**
1. DEPRESSED CURB RAMP TO LINE UP WITH BACK OF SIDEWALK.
 2. FOR SECTION A-A SEE SD-229C & SD-229D
 3. SEE SDE-229AA, SDE-229BB & SDE-229E FOR DETECTABLE WARNING SURFACES.
- DIMENSIONS ARE IN MILLIMETRES

 **THE CITY OF WINNIPEG**
 PUBLIC WORKS DEPARTMENT

Reference Spec. No.
 CW 3235, CW 3310, CW 3325
 E-SUPPLY & INSTALL DETECTABLE WARNING SURFACE

CURB RAMP LAYOUT FOR INTERSECTIONS

Designed By: B.P.	Drawn By: T.G.A.	Scale: N.T.S.
Checked By: F.W.C.	Date: 10-02-18	Drawing No.
Approved:		SDE-229A

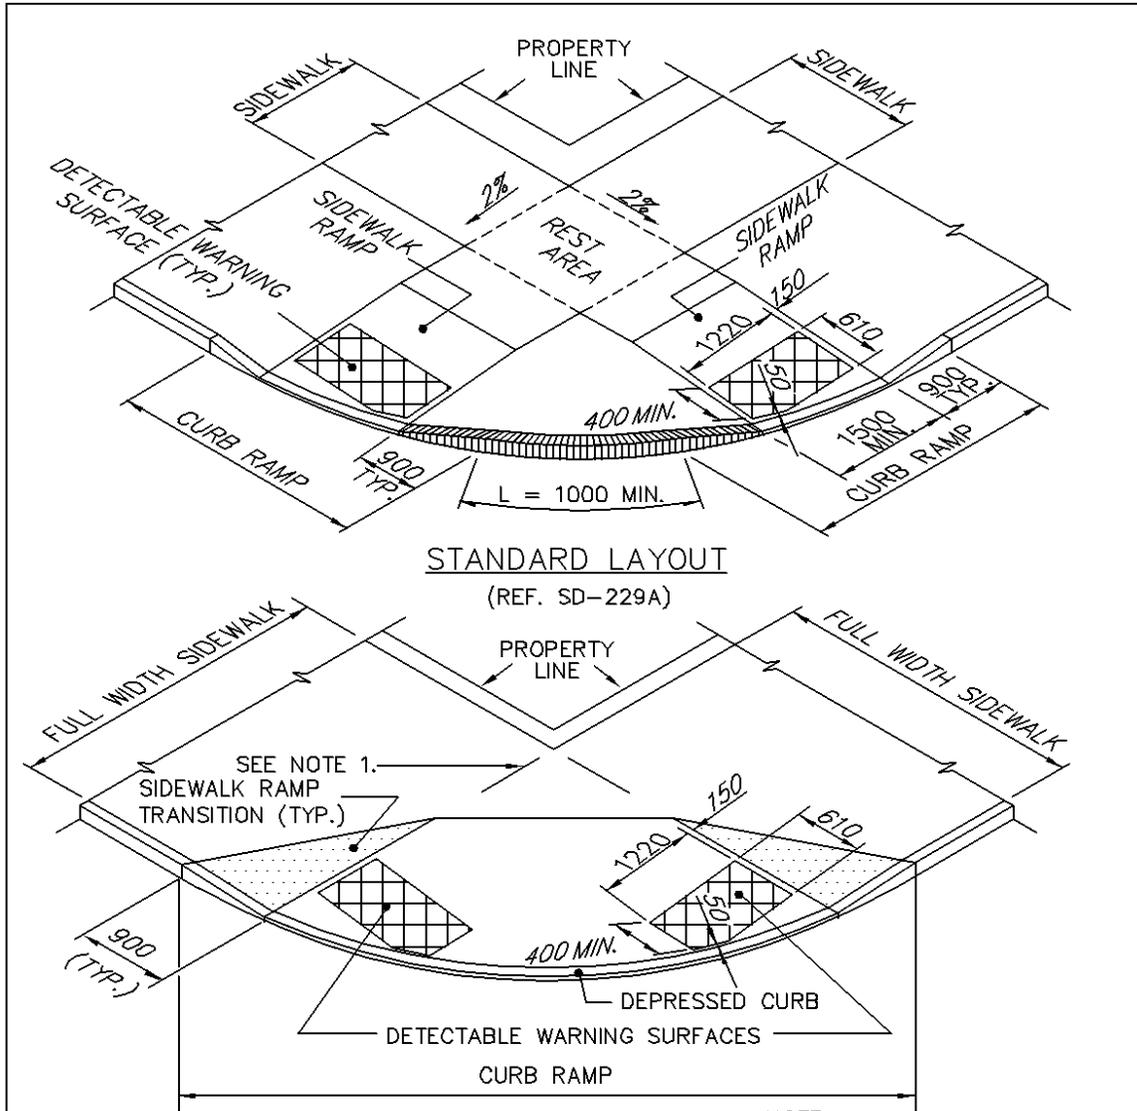

STANDARD LAYOUT

(REF. SD-229A)

ALTERNATE LAYOUT

(REF. SD-229A)


NOTE:

1. DEPRESSED CURB RAMP TO LINE UP WITH BACK OF SIDEWALK.
2. FOR A 1.83m WIDE SIDEWALK USE A DETECTABLE WARNING SURFACE MEASURING 610 X 1520

DIMENSIONS ARE IN MILLIMETRES

THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT
Reference Spec. No. CW 3235, CW 3310, CW 3325 E-SUPPLY & INSTALL DETECTABLE WARNING SURFACE
DETECTABLE WARNING SURFACE IN CURB RAMPS FOR INTERSECTIONS


Designed By: B.P.	Drawn By: T.G.A.	Scale : N.T.S.
Checked By: F.W.C.	Date: 10-02-18	Drawing No.
Approved:		SDE-229AA

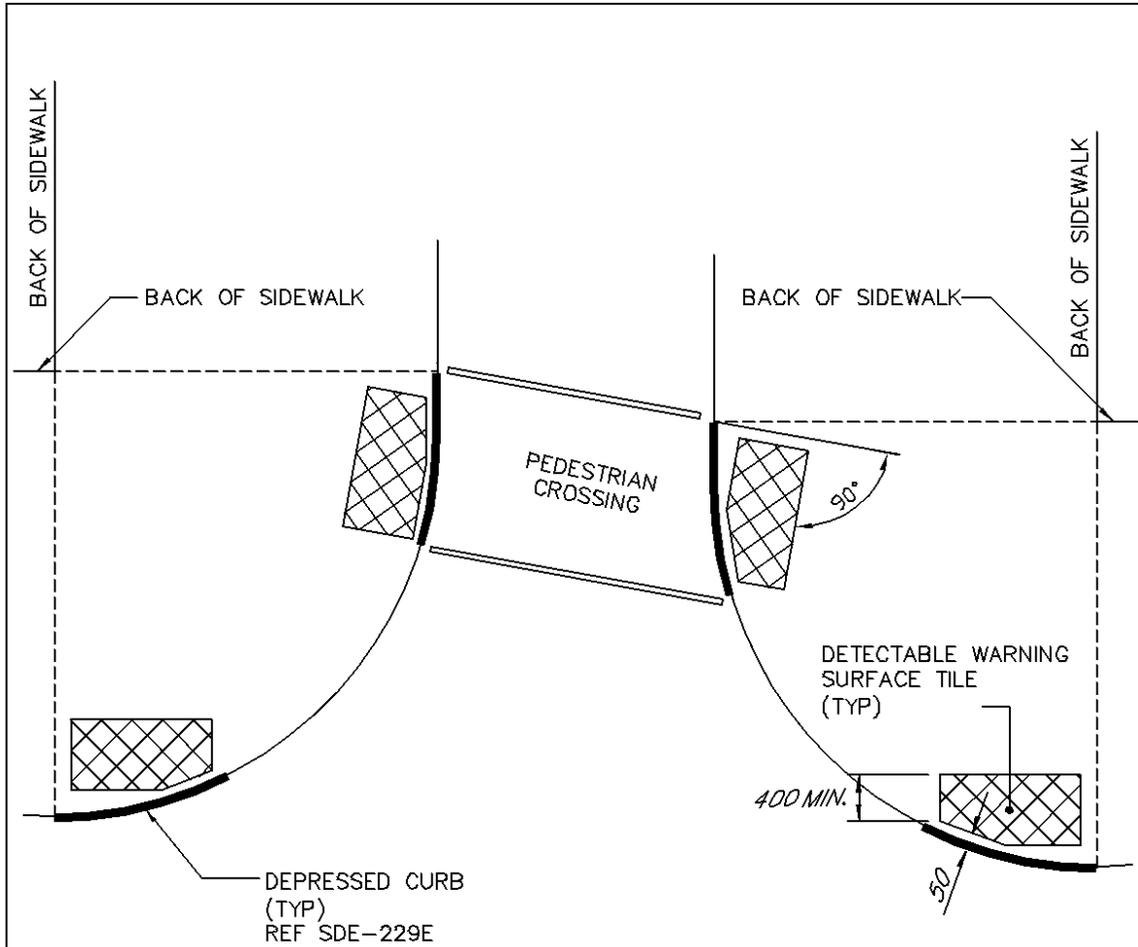

NOTES:

1. LOCATE GRATINGS, ACCESS COVERS AND OTHER APPURTENANCES OUTSIDE OF CURB RAMPS, DEPRESSED CURBS, CLEAR SPACE LANDINGS AND GUTTERS AS DIRECTED BY THE CONTRACT ADMINISTRATOR.
2. LOCATE END OF DEPRESSED CURB IN LINE WITH PROJECTED BACK OF SIDEWALK.

 THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT		DIMENSIONS ARE IN MILLIMETRES	
Reference Spec. No. CW 3235, CW 3310, CW 3325 E-SUPPLY & INSTALL DETECTABLE WARNING SURFACE		Designed By: B.P.	Drawn By: T.G.A.
CURB RAMP LAYOUT FOR OFFSET INTERSECTIONS		Checked By: F.W.C.	Date: 10-02-18
		Scale : N.T.S.	
		Drawing No. SDE-229AB	
		Approved:	

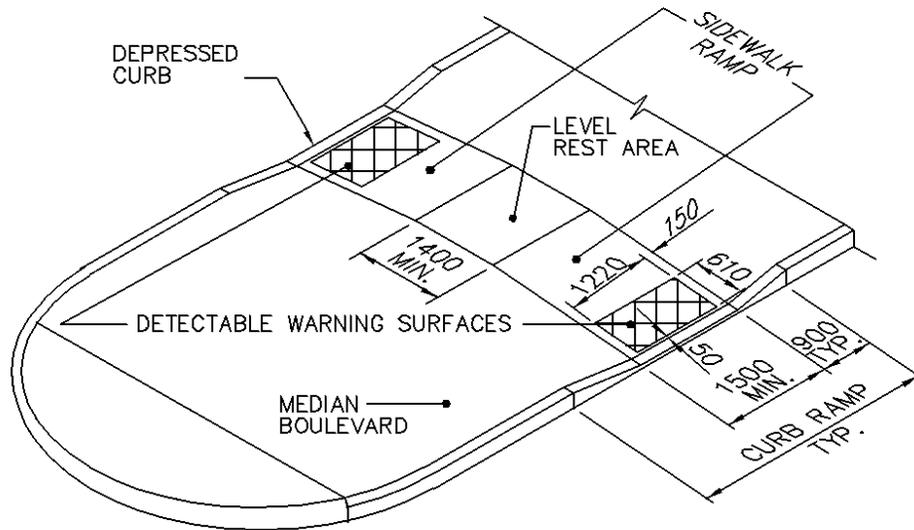


MEDIAN SIDEWALK CROSSING
 (REF. SD-229B)

NOTE:

1. FOR NARROW MEDIANS AND REFUGE ISLANDS < 1.32m IN WIDTH, PLACE DETECTABLE WARNING SURFACE FULL WIDTH, MAINTAINING 50mm SPACING FROM BACK OF CURB.
2. DETECTABLE WARNING SURFACE SHALL NOT BE PLACED AT PRIVATE APPROACHES OR ALLEYS.

 THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT		DIMENSIONS ARE IN MILLIMETRES		
Reference Spec. No. CW 3235, CW 3310, CW 3325 E-SUPPLY & INSTALL DETECTABLE WARNING SURFACE		Designed By: B.P.	Drawn By: T.G.A.	Scale : N.T.S.
DETECTABLE WARNING SURFACE IN CURB RAMPS FOR MEDIANS		Checked By: F.W.C.	Date: 10-12-18	Drawing No. SDE-229BB
		Approved:		

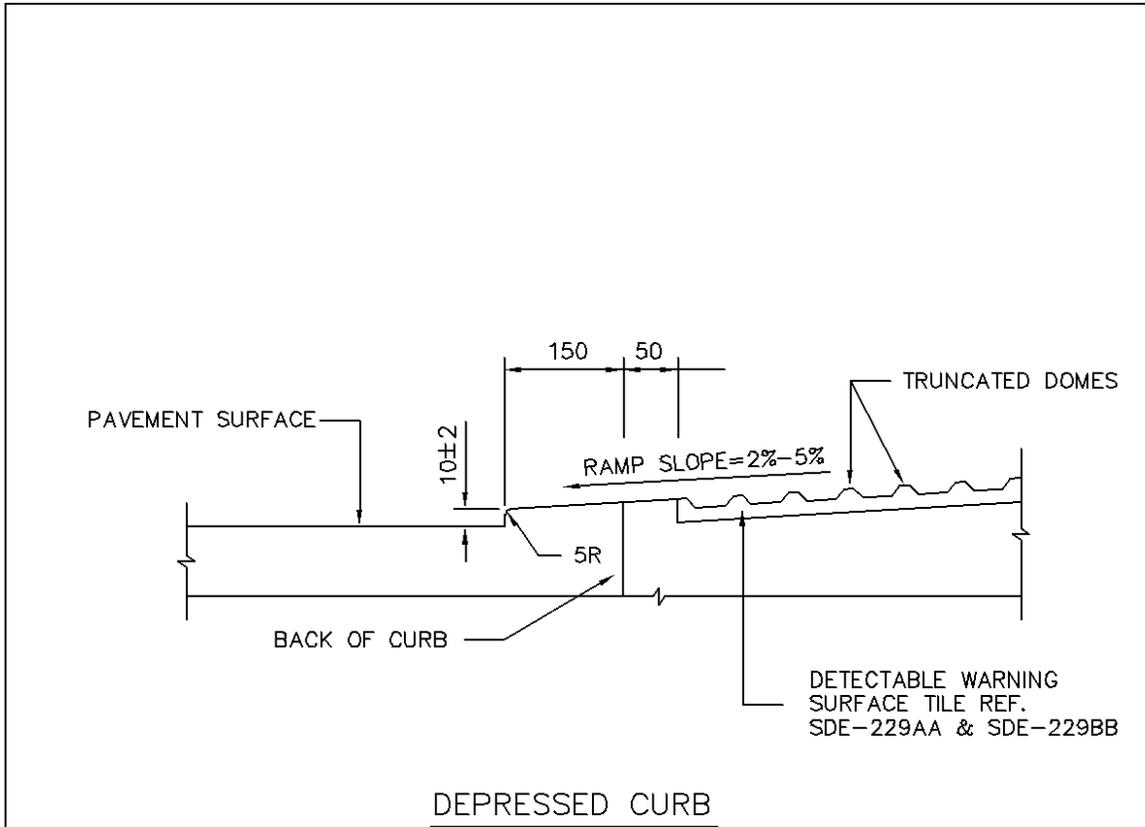

DEPRESSED CURB

NOTES:

- 1) SIDEWALK RAMP SURFACE SHALL BE GIVEN A PARALLEL TEXTURED BROOM FINISH.
- 2) INSTALL DETECTABLE WARNING SURFACE SO THAT THE TOP OF THE TRUNCATED DOMES ARE FLUSH WITH THE SURFACE OF THE ADJACENT SIDEWALK.

 THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT		DIMENSIONS ARE IN MILLIMETRES		
Reference Spec. No. CW 3235, CW 3310, CW 3325 E-SUPPLY & INSTALL DETECTABLE WARNING SURFACE				
CURB RAMP DEPRESSED CURB		Designed By: B.P.	Drawn By: T.G.A.	Scale : N.T.S.
		Checked By: F.W.C.	Date: 10-02-18	Drawing No.
		Approved:		SDE-229E

Manufacturer's Installation Manual Armor-Tile Cast In Place

Inline Dome Detectable/Tactile Warning Surface Tile

- A. During Cast In Place Detectable/Tactile Warning Surface Tile installation procedures, ensure adequate safety guidelines are in place and that they are in accordance with the applicable industry and government standards.
- B. The specifications of the structural embedment flange system and related materials shall be in strict accordance with the contract documents and the guidelines set by their respective manufacturers. Not recommended for asphalt applications.
- C. The physical characteristics of the concrete shall be consistent with the contract specifications while maintaining a slump range of 4 – 7 to permit solid placement of the Cast In Place Detectable/Tactile Warning Surface Tile system. An overly wet mix will cause the tile to float. Under these conditions, suitable weights such as 2 concrete blocks or sandbags (25 lb) shall be placed on each tile.
- D. Prior to placement of the Cast In Place Detectable/Tactile Warning Surface Tile system, the contract drawings shall be reviewed.
- E. The concrete pouring and finishing operations require typical mason's tools, however, a 4' long level with electronic slope readout, 25 lb. weights, and a large non-marring rubber mallet are specific to the installation of the Cast In Place Detectable/Tactile Warning Surface Tile system. A vibrating mechanism such as that manufactured by Vibco can be employed, if desired. The vibrating unit should be fixed to a soft base such as wood, at least 1 foot square.
- F. The factory-installed plastic sheeting must remain in place during the entire installation process to prevent the splashing of concrete onto the finished surface of the tile.
- G. When preparing to set the tile, it is important that NO concrete be removed in the area to accept the tile. It is imperative that the installation technique eliminates any air voids under the tile. Holes in the tile perimeter allow air to escape during the installation process. Concrete will flow through the large holes in each embedment flange on the underside of the tile. This will lock the tile solidly into the cured concrete.
- H. The concrete shall be poured and finished true and smooth to the required dimensions and slope prior to the tile placement. Immediately after finishing concrete, the electronic level should be used to check that the required slope is achieved. The tile shall be placed in accordance with the contract drawings. The Cast In Place Detectable/Tactile Warning Surface Tiles shall be tamped (or vibrated) into the fresh concrete to ensure that the field level of the tile is flush to the adjacent concrete surface. The embedment process should not be accomplished by stepping on the tile as this may cause uneven setting which can result in air voids under the tile surface. The contract drawings indicate that the tile field level (base of truncated dome) is flush to adjacent surfaces to permit proper water drainage and eliminate tripping hazards between adjacent finishes.
- I. In cold weather climates it is recommended that the Cast In Place Detectable/Tactile Warning Surface Tiles be set deeper such that the top of domes are level to the adjacent concrete on the top and sides of ramp and that the base of domes to allow water drainage. This installation will reduce the possibility of damage due to snow clearing operations.
- J. Immediately after placement, the tile elevation is to be checked to adjacent concrete. The elevation and slope should be set consistent with contract drawings to permit water drainage to curb as the design dictates.
- K. While concrete is workable, a 3/8" radius edging tool shall be used to create a finished edge of concrete, then a steel trowel shall be used to finish the concrete around the tile's perimeter, flush to the field level of the tile.
- L. During and after the tile installation and the concrete curing stage, it is imperative that there is no walking, leaning or external force placed on the tile that may rock the tile causing a void between the underside of tile and concrete.
- M. Following tile placement, review installation tolerances to contract drawings and adjust tile before the concrete sets. Two suitable weights of 25 lb each shall be placed on each tile as necessary to ensure solid contact of the underside of tile to concrete.
- N. Following the concrete curing stage, protective plastic wrap is to be removed from the tile surface by cutting the plastic with a sharp knife, tight to the concrete/tile interface. If concrete bled under the plastic, a soft brass wire brush will clean the residue without damage to the tile surface.
- O. If desired, individual tiles can be bolted together using ¼ inch or equivalent hardware. This can help to ensure that adjacent tiles are flush to each other during the installation process. Tape or caulking can be placed on the underside of the bolted butt joint to ensure that concrete does not rise up between the tiles during installation. Any protective plastic wrap which was peeled back to facilitate bolting or cutting, should be replaced and taped to ensure that the tile surface remains free of concrete during the installation process.
- P. Tiles can be cut to custom sizes, or to make a radius, using a continuous rim diamond blade in a circular saw or mini-grinder. Use of a straightedge to guide the cut is advisable where appropriate.
- Q. Any sound-amplifying plates on the underside of the tile, which are dislodged during handling or cutting, should be replaced and secured with construction adhesive. The air gap created between these plates and the bottom of the tile is important in preserving the detectability properties of the Armor-Tile system as required in various jurisdictions.