


WET WELL PARTIAL FLOOR PLAN

SPECIFIC NOTES:

1. INSTALL BEAMS.

- 2. SAWCUT SLAB FOR OPENINGS.
- 3. DO NOT OVER CUT CORNERS.
- 4. CHANNELS AND ANGLE FINISH: SSPC-SP6 SURFACE PREPARATION C/W 2) COATS SELF-PRIMING EPOXY PAINT (10 MILS TOTAL DFT). (INTERNATIONAL P.C. INTERGARD 345 OR EQUIV.) COLOUR: GREY
- 5. BOLTS TO BE ASTM A193/A320 GRADE B8M CLASS 2 (AISI SS316) C/W ASTM A194 GRADE 8M NUTS (AISI SS316) AND AISI SS 316
- 6. CONCRETE ANCHORS HILTI KWIK BOLTS 3, STAINLESS STEEL, EMBED MININUM 95 INTO CONCRETE.
- 7. LOCATE EXISTING REBAR IN CONCRETE BEAMS. SPACE BETWEEN CHANNELS IS ±50 TO ALLOW HILTI ANCHORS TO MISS REBAR.

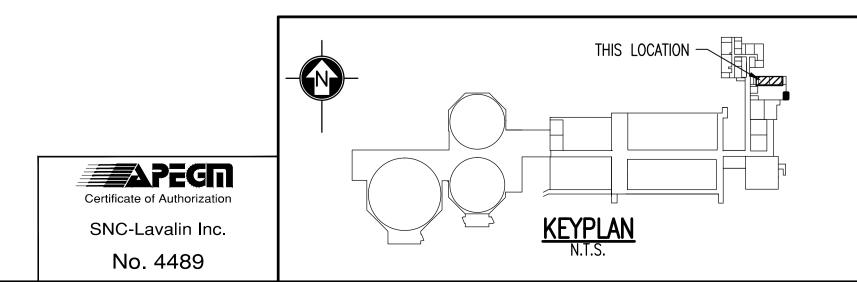

					SNC·LAVALIN	SNC-LAVALIN INC. 148 Nature Park Way Winnipeg, MB, Canada R3P 0X7 204-786-8080	ORIGINAL SEALE K. K. SNC-L MEMBER 2012/ REV.
					DESIGNED BY: K. KOTYK	CHECKED BY: R. BEAN	
					DRAWN BY: M. TUGADE	APPROVED BY: C. REIMER	
					scale: AS NOTED	RELEASED FOR CONSTRUCTION BY: NEIL HARRINGTON	
					DATE: 2012/06/18	DATE: 2012/10/15	
00	ISSUED FOR TENDER, BID OPP. 545-2012	2012/10/15	KK	RB	CONSULTANT NO.:	0440 4000 00045	1
NO.	REVISIONS	DATE	DESIGN	CHECK	112577-0116-42DD-00045		

ORIGINAL DRAWING SEALED BY: K. K. KOTYK SNC-LAVALIN MEMBER #21950 2012/10/18

RÉV. 00

THE CITY OF WINNIPEG Winnipeg WATER AND WASTE DEPARTMENT SOUTH END WATER POLLUTION CONTROL CENTRE

VENTILATION & MISC. UPGRADE MECHANICAL OEPNING & DETAILS GRIT BUILDING WET WELL

CITY DRAWING NUMBER SHEET REV. SIZE 1-0102G-S0018 001 00 A1

1-0102G-S0018-001-00.dwg