


FLOOR PLAN
1:50

DOOR SCHEDULE															
DOOR										FRAME				HARDWARE GROUP	REMARKS
DOOR NUMBER	DOOR TYPE	WIDTH	HEIGHT	THICKNESS	MATERIAL	FINISH	GLAZING	RATING	FRAME TYPE	MATERIAL	FINISH	RATING			
D-06	NL	914	2134	45	HM	PAINT	T		F-1	HM	PAINT		1	INSULATED DOOR AND FRAME	
D-07	NL	914	2134	45	HM	PAINT	T		F-1	HM	PAINT		1	INSULATED DOOR AND FRAME	
D-08	OH	3048	3048	50	STL	PREFN	-		(1)	-	-			INSULATED OVERHEAD DOOR	
D-09	OH	3048	3048	50	STL	PREFN	-		(1)	-	-			INSULATED OVERHEAD DOOR	


ABBREVIATIONS			NOTE	
EXT	EXTERIOR	T	TEMPERED SEALED	(1) SEE 2/A10 AND 2/A10 FOR DOOR FRAMING DETAILS
NL	NARROW LITE		DOUBLE GLAZED UNIT	
HM	HOLLOW METAL	STL	STEEL	
OH	OVERHEAD			

HARDWARE GROUPINGS	
GROUP 1	
SINGLE EXTERIOR DOOR	
PANIC BAR	
KABA E-PLEX KEYLESS LOCK	
MEDICO SECURITY CYLINDER	
CLOSER	
WEATHER STRIPPING	
DOOR SWEEP	
THRESHOLD	
FULL HEIGHT ASTRAGAL	

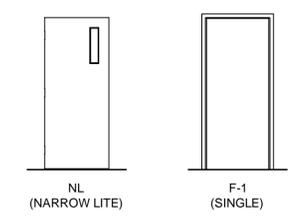

DOOR AND FRAME ELEVATIONS
1:50

CONSTRUCTION ASSEMBLIES	
(F2) FOUNDATION WALL	CONCRETE FACED INSULATED WALL PANEL (8mm CONCRETE ON 50 RIGID INSULATION MANUFACTURER; TECH-CRETE INSULATED PANEL PRODUCTS OR EQUIVALENT) 300 THICK CONCRETE WALL
(W2) EXTERIOR WALL	38 PRE-FINISHED METAL SIDING 16 PLYWOOD SHEATHING 140 WOOD STUDS @ 400 O.C. R20 BATT INSULATION VAPOUR BARRIER 16 PLYWOOD SHEATHING
(R2) ROOF	38 PRE-FINISHED METAL SIDING 38 x 89 WOOD STRAPPING AT 610 O.C. PRE-ENG WOOD TRUSSES @ 600 O.C. R40 BATT INSULATION VAPOUR BARRIER 38x89 STRAPPING @ 610 O.C. TO U/S TRUSSES PRE-FINISHED METAL LINER PANEL

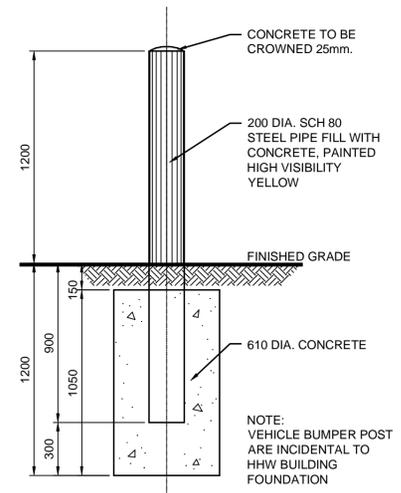

1 VBP DETAIL
1:20



METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

B.M. ELEV.	DESIGNED BY LDP				4R WINNIPEG DEPOT BRADY ROAD RESOURCE MANAGEMENT FACILITY	CITY DRAWING NUMBER 1-0400A-A0006-001
	DRAWN BY PDR					SHEET 4 OF 11
	CHECKED BY LDP					CONSULTANT DRAWING NUMBER A6 (AD-1)
	APPROVED BY ARR					
	HOR. SCALE AS NOTED	RELEASED FOR CONSTRUCTION	CONSULTANT PROJECT NUMBER 13-8224			
	VERTICAL	DATE				
1 ISSUED FOR ADDENDUM #1	14/07/08	ARR				
NO. REVISIONS	DATE	BY	DATE	JULY 2014		