

KENASTON BOULEVARD SOUTHBOUND

BISON DRIVE

INSTALL 53.7m - 300mm PVC LDS TO POND, GR=5.35%

INSTALL 56.6m - 300mm PVC LDS TO POND, GR=5.55%

NATIVE PLANTING


METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES



WARNING
IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:
1. NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
2. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.
3. OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION.

NOTE: POND CONSTRUCTION AND NATURALIZED PLANTING BY OTHERS.

NOTE: SEE SHEET 58 FOR OUTFALL DETAILS.

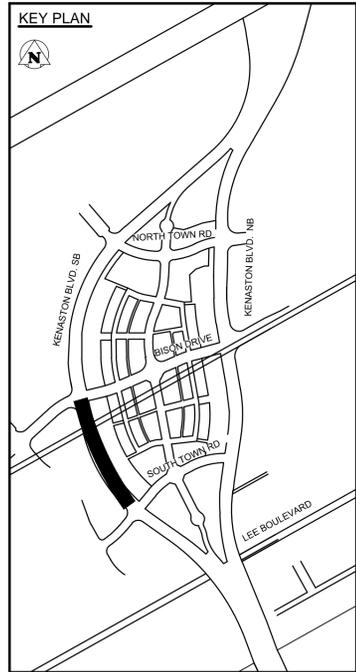

150 WM	WATERMAIN	150 WM	MTS	M.T.S.	150 mm W.M.	WATERMAIN	150 mm W.M.	UNDERGROUND STRUCTURES	B.M. ELEV.	DESIGNED BY	D.J.M., D.P.M.	DESIGN TEAM	ENGINEER'S SEAL	<p>THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT</p>	<p>WWARP PART 3 - CONTRACT 1 STA 2+922.4 TO STA 5+935</p>	<p>CITY DRAWING NUMBER LD-7079</p>
300 LDS	LAND DRAINAGE SEWER	300 LDS		CONCRETE	300 mm L.D.S.	HYDRANT VALVE	300 mm L.D.S.	DATE	DRAWN BY	T.G.			<p>SHEET 59 OF 64</p>			
250 WWS	WASTE WATER SEWER	250 WWS		ASPHALT	250 mm W.W.S.	VALVE	250 mm W.W.S.	DATE	CHECKED BY	D.P.M.					<p>CONSULTANT PROJECT NUMBER 113705751</p>	<p>CONSULTANT DRAWING NUMBER C-403</p>
○	MANHOLE	●		PLANING		LAND DRAINAGE SEWER		NOTE:	APPROVED BY	D.P.M.	<p>RELEASED FOR CONSTRUCTION</p>	<p>DATE</p>				
○	CATCH BASIN	■		SIDEWALK		WASTE WATER SEWER		LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE, BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	HOR. SCALE	1:500			<p>DATE</p>			
○	TEST HOLES	⊕		PAVING STONES		Q PROFILE		NO.	VERTICAL		<p>DATE</p>					
○	CULVERT	▭		PROPERTY LINE		NORTH/WEST GUTTER		1	ISSUED FOR REVIEW	3/03/27		<p>DATE</p>				
○	GAS	○		SURVEY BAR		SOUTH/EAST GUTTER		2	ISSUED FOR TENDER	3/04/08	<p>DATE</p>					
○	HYDRO	○		CURB RAMP		NORTH/WEST T/LANE		0	ISSUED FOR 90% REVIEW	3/02/22		<p>DATE</p>				
○	LEGEND-PLAN	○	PROPOSED	DITCH		SOUTH/EAST T/LANE					<p>DATE</p>					
○	LEGEND-PROFILE	○	EXISTING	SWALE								<p>DATE</p>				

VA:113705751\drawing\404_working\sheet_files\05751c-402-outfalls.dwg