


PAVING DETAIL (TYP)
N.T.S.

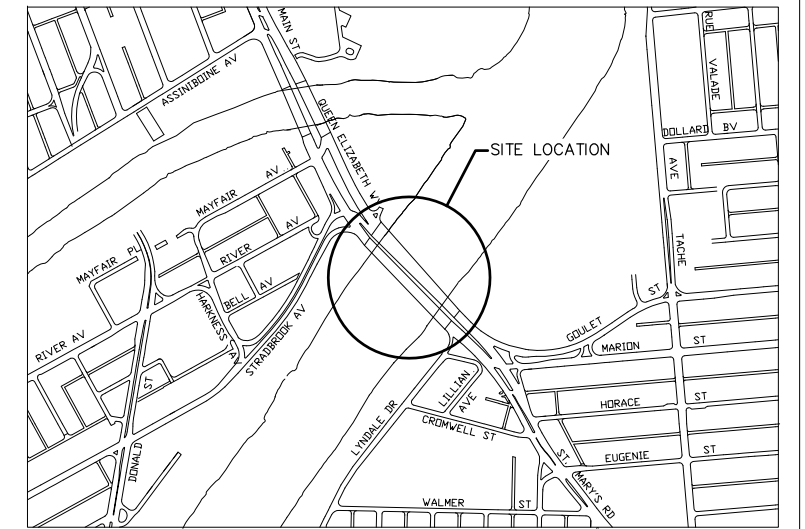

LOCATION PLAN

NORWOOD BRIDGE
N.T.S.

- ① SOUTHWEST CORNER APPROACH SLAB = 160 m² ±
- ② SOUTHEAST CORNER APPROACH SLAB = 200 m² ±
- ③ NORTHWEST CORNER APPROACH SLAB = 70 m² ±
- ④ NORTHEAST CORNER APPROACH SLAB = 55 m² ±
- ⑤ NORTHBOUND STRUCTURE – REMOVE PAVERS IN A 2 m X 2 m AREA AND EXPOSE DECK FOR INSPECTION IN TWO (2) LOCATIONS. AFTER INSPECTION REINSTALL SAND AND PAVERS.

***NOTE:**

- PLANTERS ARE MARKED WITH CHALK LINES TO INDICATE CORRECT HEIGHT OF PAVERS.
- SEE SECTION E2 OF SPECIFICATION FOR PAVER TYPES.

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

NOTE:

B.M. ELEV.	DESIGNED BY:	ENGINEER'S SEAL
	B.A.N.	
	DRAWN BY: J.G.W.	
	CHECKED BY: B.A.N.	
	APPROVED BY: B.A.N.	
	AUTHORIZED BY:	
0 ISSUED FOR TENDER	27/06/13	J.G.W.
NO. REVISION	DATE	BY

BID OPPORTUNITY NO.: 477-2013

CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

NORWOOD BRIDGE AND ISLAND LAKES
STONE PAVER RE-LEVELING

GENERAL ARRANGEMENTS AND
TYPICAL PAVER REPAIRS

SHEET 1 OF 1
HORIZONTAL: N.T.S.
VERTICAL: N.T.S.
CITY DRAWING NUMBER:
B103-2013-01