



MAN DOOR FRAME

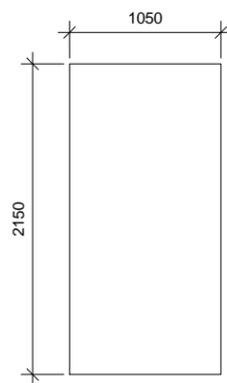

MAN DOOR

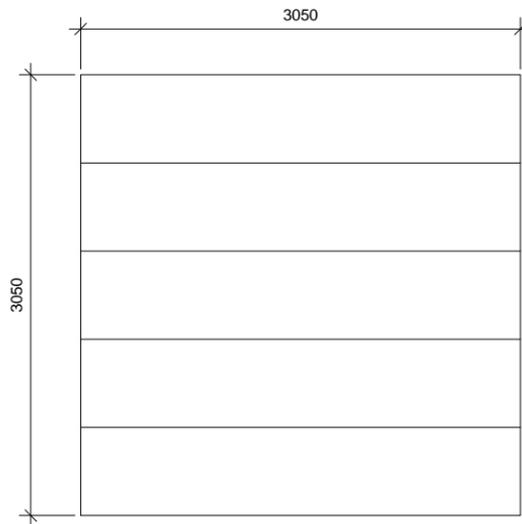

OVERHEAD DOOR

DOOR FRAME TYPES

1 : 50

DOOR TYPES

1 : 50

DOOR SCHEDULE

DOOR TYPE:	D1 - MAN DOOR
HARDWARE SET:	1
WIDTH:	1050
HEIGHT:	2150
THICKNESS:	44
DOOR MATERIAL:	16 GA. STEEL
DOOR FINISH:	GALVANIZED & PAINTED
DOOR FIRE RATING:	NO
INSULATED:	NO
FRAME TYPE:	MAN DOOR FRAME
FRAME MATERIAL:	14 GA. STEEL
FRAME FIRE RATING:	NO
FRAME FINISH:	GALVANIZED & PAINTED
GLAZING TYPE:	N/A
COMMENTS:	PAINT DOOR AND FRAME; COLOUR TO BE SELECTED BY CONTRACT ADMINISTRATOR

HARDWARE SET 1:

1 Continuous Hinge	FM300	US32D	MA
1 Storeroom Lock	28 70 10G04 LL	US26D	SA
2 Deadbolts	70 485	US26D	SA
3 BEST cores	By City of Winnipeg		
1 Overhead Stop	690S	US26D	SA
1 Door Closer	351 P10	EN	SA
1 Threshold	2746 x 6A		PE
1 Gasketing	2891AS (Head)		PE
2 Gasketing	290AS		PE
1 Sweep	315CN		PE
1 Astragal	3572SP		PE

NOTE: Cut astragal to fit around the storeroom lock strike. Mount closer shoe to gasketing. Deadbolts to be located top and bottom as directed by CONTRACT ADMINISTRATOR.

DOOR TYPE:	D2 - OVERHEAD DOOR
HARDWARE SET:	N/A
WIDTH:	3050
HEIGHT:	3050 (610 PANELS)
THICKNESS:	51
DOOR MATERIAL:	20 GA. STEEL
DOOR FINISH:	PREFINISHED; WHITE (MATCH CLADDING)
DOOR FIRE RATING:	NO
INSULATED:	NO
FRAME TYPE:	STEEL TRACK; BY MANUFACTURER
FRAME MATERIAL:	STEEL
FRAME FIRE RATING:	NO
FRAME FINISH:	GALVANIZED
GLAZING TYPE:	N/A
COMMENTS:	HEAVY-DUTY WEATHERSTRIPPING; MEDIUM-DUTY ELECTRIC OPERATOR; KEYED LOCK WITH INTERLOCK TO ELECTRIC OPERATOR; OVERHEAD DOOR TO BE MODEL 3250 RIBBED STEEL COMMERCIAL DOOR SERIES DOORS BY C.H.I. OVERHEAD DOORS OR APPROVED EQUAL; OPERATOR TO BE MODEL MT-50 MEDIUM DUTY TROLLEY OPERATOR BY LIFTMASTER OR APPROVED EQUAL

EXTERIOR WALL TYPES

EW1	METAL CLADDING ON WOOD STUD FRAMING (45 MIN FRR) •22MM PREFINISHED 22 GA. CORRUGATED METAL CLADDING (2 COLOURS; AS NOTED) •SPUN POLYOLEFIN WATER RESISTIVE BARRIER MEMBRANE •16MM TYPE-X GLASS FIBRE REINFORCED EXTERIOR SHEATHING •140MM WOOD STUD FRAMING @ 406MM O.C. •16MM TYPE-X GLASS FIBRE REINFORCED EXTERIOR SHEATHING; PAINTED •19MM G1S PLYWOOD INTERIOR SHEATHING (WHERE NOTED); PAINTED
EW2	POLYCARBONATE CLADDING ON WOOD STUD FRAMING •22MM CORRUGATED POLYCARBONATE CLADDING •16MM X 38MM (OR AS NOTED) PLWD PT PLWD FURRING •WOOD TRUSS FRAMING
EW3	GRADE BEAM •CEMENT PARGING ON GALVANIZED METAL LATH •BITUMINOUS DAMPROOFING •REINFORCED CONCRETE GRADE BEAM (REFER TO STRUCTURAL)

ROOF TYPES

R1	METAL ROOFING ON WOOD STUD FRAMING •22MM PREFINISHED 22 GA. STANDING SEAM METAL ROOFING •ADHERED WATERPROOF MEMBRANE •16MM PLYWOOD SHEATHING •WOOD TRUSS FRAMING
-----------	--

FLOOR TYPES

F1	SLAB ON GRADE •REINFORCED CONCRETE SLAB ON GRADE (REFER TO STRUCTURAL) •UNDERSLAB VAPOUR BARRIER MEMBRANE •COMPACTED SAND •COMPACTED BASE (REFER TO STRUCTURAL) •COMPACTED SUB-BASE (REFER TO STRUCTURAL)
-----------	--

ASSEMBLY NOTES:

- METAL CLADDING TO BE VICWEST 7/8" (22mm) CORRUGATED, 22 GAUGE THICKNESS OR APPROVED EQUAL
- METAL CLADDING COLOURS TO BE WHITE WHITE (COLOUR 1) & BONE WHITE (COLOUR 2)
- METAL ROOFING TO BE VICWEST TRADITION 100 STANDING SEAM ROOFING C/W SNAP CAP OR APPROVED EQUAL
- METAL ROOFING COLOUR TO BE WHITE WHITE
- ALL FASCIA AND TRIMS BY MANUFACTURER, COLOUR TO BE WHITE WHITE
- CORRUGATED POLYCARBONATE CLADDING TO BE SUNSKY 7/8" (22mm) PREMIUM CORRUGATED POLYCARBONATE CLADDING, SOFT WHITE, 85% LIGHT TRANSMISSION OR APPROVED EQUAL
- PRIME AND PAINT INTERIOR FACE OF EW1 INTERIOR SHEATHING TYP
- PRIME AND PAINT INTERIOR FACE OF EW1 INTERIOR PANELLING TYP
- PAINT TO BE EXTERIOR GRADE LATEX, SEMIGLOSS FINISH, OVER ALKYD PRIMER; COLOURS TO BE SELECTED BY CONTRACT ADMINISTRATOR

SYMBOL LEGEND

	SECTION DETAILS & BUILDING SECTION TAG
	CALLOUT TAG
	ELEVATION TAG
	LEVEL TAG
	SPOT ELEVATION
	WALL TAG
	FLOOR TAG
	ROOF TAG
	DOOR TAG
	KEYNOTE TAG
	GRID LINE
	ROOM TAG
	INDICATES GLAZING
	BREAK LINE
	CENTRE LINE
	DRAWING TITLE
	NORTH ARROW

