


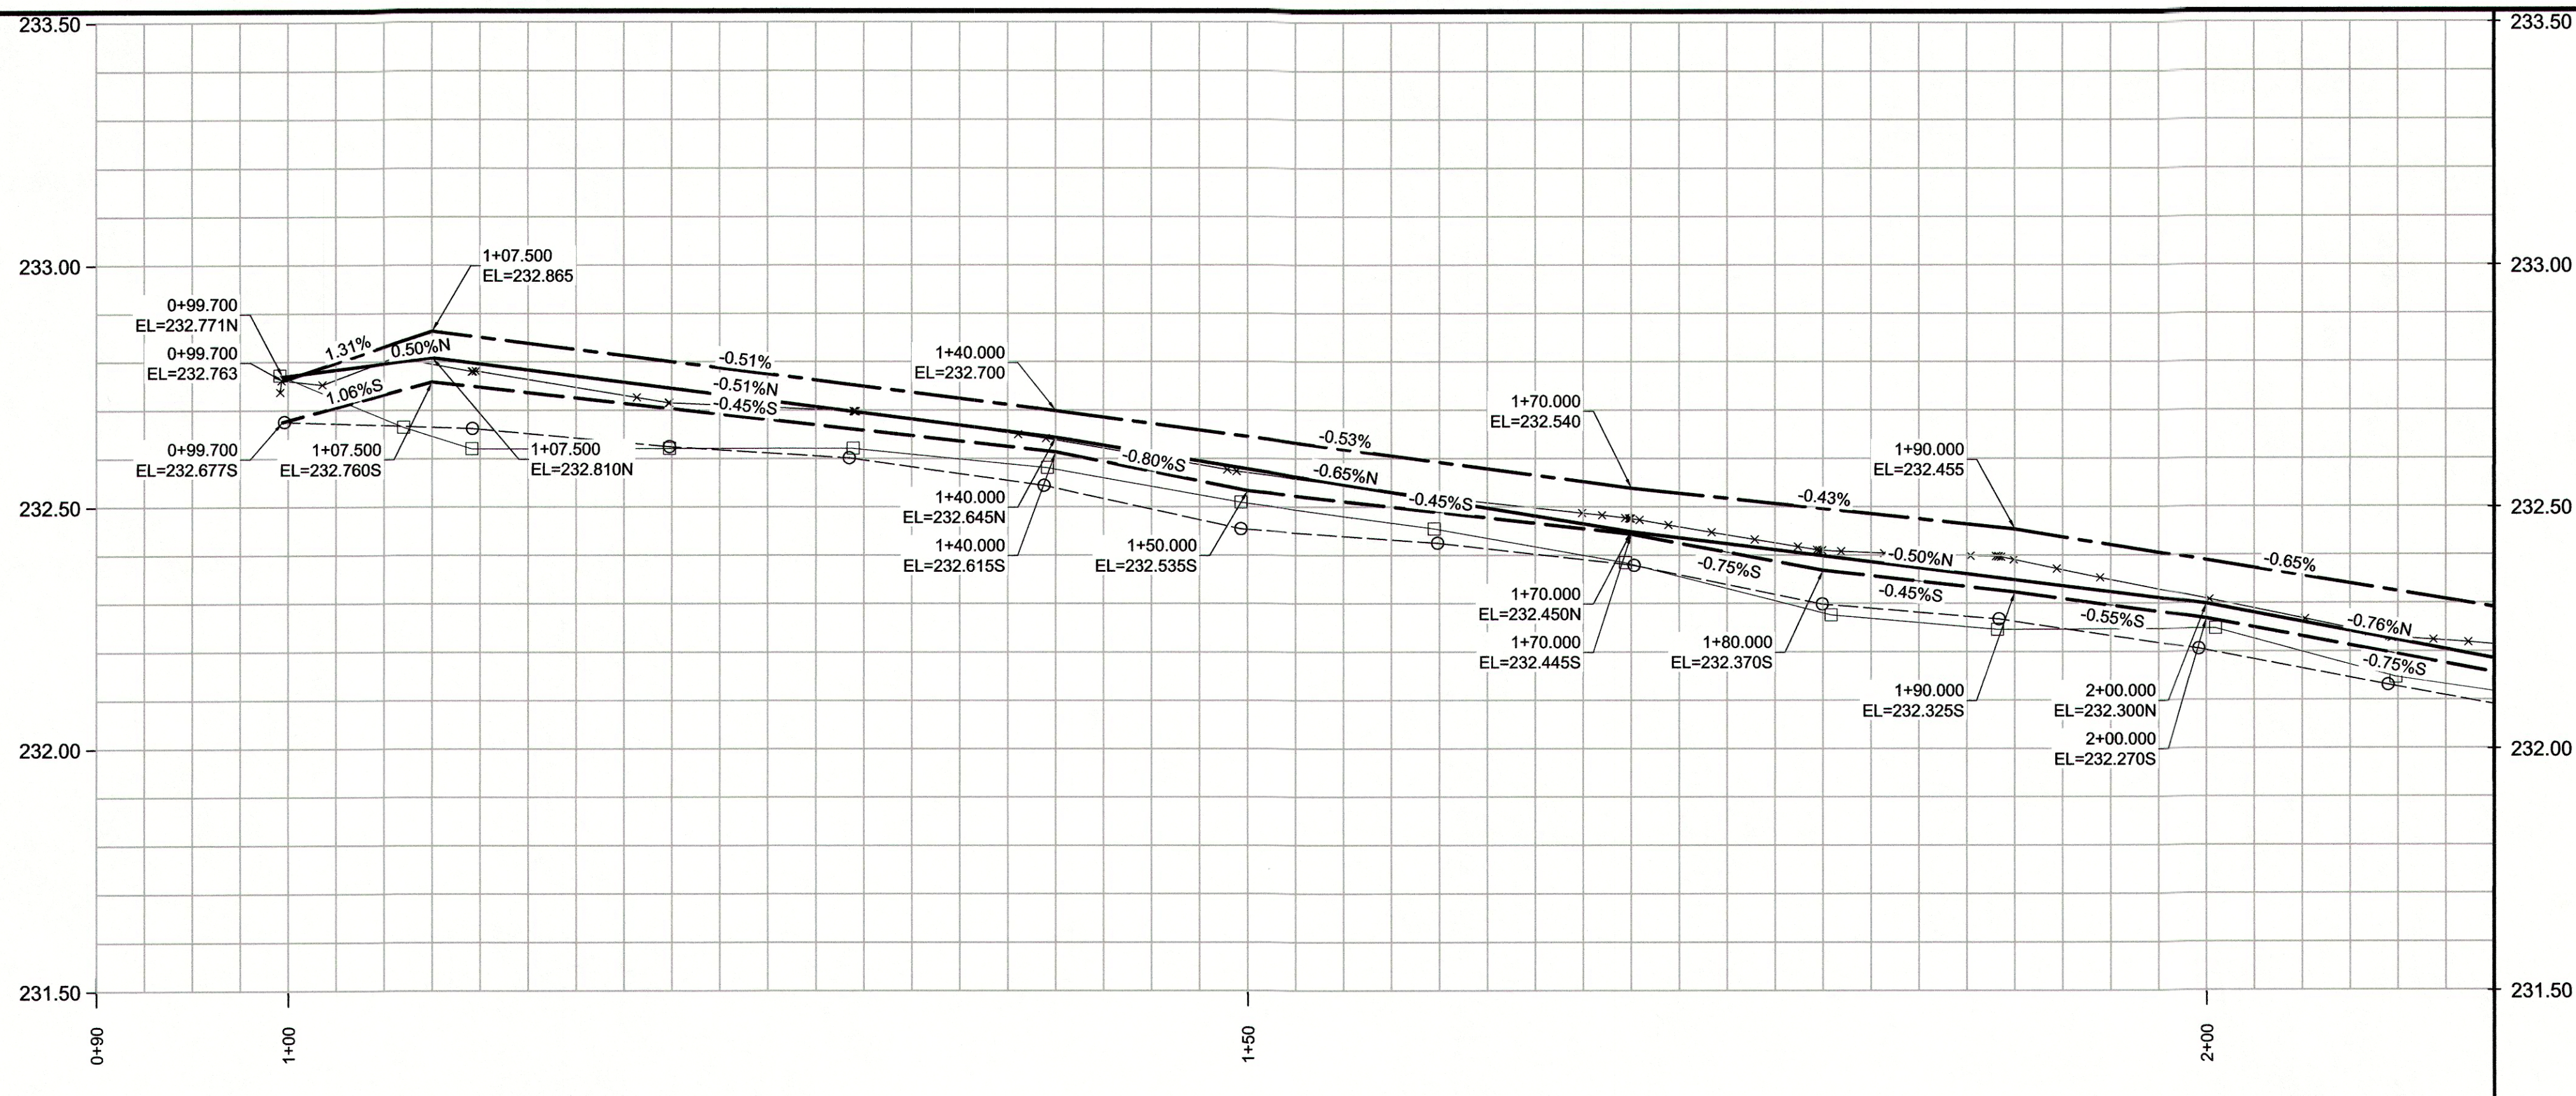

#### REFERENCE NOTES

- PAVEMENT DIMENSIONS ARE TO BACK OF CURB
- BASELINE IS CENTRE LINE RIGHT-OF-WAY
- PROPERTY LINES OBTAINED FROM CITY OF WINNIPEG L.B.I.S., AND NO SCALE FACTOR WAS APPLIED
- REFER TO AECOM FIELD BOOK NO. 4817

#### CONSTRUCTION NOTES

- PLACE NEW ASPHALTIC PAVEMENT TYPE1A (AVG. THICKNESS 75mm)
- REMOVE EXISTING CONCRETE PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT c/w 75mm ASPHALT OVERLAY
- REMOVE EXISTING CONCRETE PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT
- CONSTRUCT NEW BARRIER CURB (100mm REVEAL HT. SEPARATE)
- REMOVE EXISTING MOUNTABLE CURB AND CONSTRUCT NEW BARRIER CURB (100mm REVEAL HT. DOWELLED)
- REMOVE EXISTING CURB AND CONSTRUCT NEW MODIFIED BARRIER CURB (100mm REVEAL HT. DOWELLED)
- CONSTRUCT NEW LIP CURB (40mm HT. INTEGRAL)
- REMOVE EXISTING ASPHALTIC PAVEMENT
- REMOVE AND REINSTALL EXISTING PAVERS
- ADJUST EXISTING WATER VALVE TO GRADE
- ADJUST EXISTING MANHOLE/CATCHBASIN TO GRADE
- REMOVE EXISTING FRAME AND COVER AND INSTALL NEW FRAME AND COVER (AP-005 AND AP-004)

