

**GENERAL NOTES:** 


IF NEED BE.

- PATCH ALL HOLES IN FLOOR, WALLS, ROOF, AND OTHER SURFACES (WATER AND AIR TIGHT AS REQUIRED) CREATED BY REMOVAL OF EXISTING EQUIPMENT AND PIPING, MATCH EXISTING. TYPICAL THROUGHOUT CONTRACT. MAINTAIN INTEGRITY OF FIRE SEPARATIONS. TYPICAL OF ALL WORK.
- CONTRACTOR TO CONFIRM ALL DIMENSIONS ON SITE PRIOR TO FABRICATING OR ORDERING COMPONENTS. TYPICAL OF
- CONTRACTOR TO CONFIRM EXACT LOCATIONS OF ALL NEW
   EXISTING EQUIPMENT ON SITE. TYPICAL OF ALL WORK.
- 4. ALL BUILDING DIMENSIONS ARE APPROXIMATE. FIELD VERIFY

## **DEMOLITION NOTES:**

(1) EXISTING ROOM EXHAUST FAN TO BE REMOVED.


- (2) 400 x 225 EXHAUST GOOSENECKS TO BE REMOVED AND REPLACED WITH NEW EXHAUST GOOSENECKS. NEW EXHAUST TO BE WEATHERPROOF AND WATERTIGHT WITH THE ROOF'S CONNECTION.
- 3 EXISTING FURNACE AIR DUCT WORK IS EXPOSED AT THE CEILING LEVEL. DUCTWORK TO REMAIN.
- (4) EXISTING COMBUSTION AIR INTAKE TO REMAIN.
- (5) EXISTING SUPPLY DUCTWORK TO BE REMOVED. IN THIS LOCATION DRYWALL CEILING IS TO BE PATCHED, PAINTED AND CONSTRUCTED TO MATCH THE EXISTING CEILING.
- 6 REMOVE GOOSENECK AND CAP EXHAUST WITH A WEATHERPROOF AND WATERTIGHT SEAL.
- 7 EXISTING EXHAUST GOOSENECK TO REMAIN.

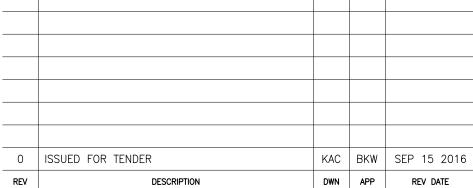



1349 Dugald Road, Winnipeg, Manitoba, Canada R2J 0H3 phone 204.944.1555 fax 204.944.1444 www.accutecheng.ca

PERMIT TO PRACTICE



Certificate of Authorization

Accutech Engineering Inc.

No. 1660 Date: SEP 15 2016

THE CITY OF WINNIPEG GREENDELL PARK C.C.

HVAC ELECTRICAL UPGRADES

MAIN FLOOR DEMOLITION PLAN
ROOF DEMOLITION PLAN

DRAWN BY	CHECKED BY	SCALE AS NOTED	SHEET NO M 100
LCS	18558	SEP 15 2016	0