


Product specification




Brigade Model Number: MDR-508-1000 / MDR-508GW-1000 / MDR-508G-1000 / MDR-508W-1000

Brigade Part Number: 5126 / 5127 / 5128 / 5129

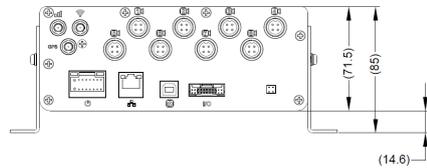

Dimensions: mm

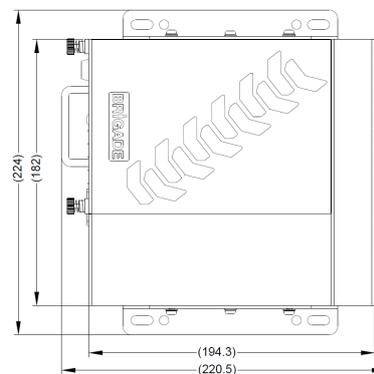

Environmental Specifications:

- Shock Rating: 51G
- Vibration Rating: 1G
- Operating Relative Humidity: 10% to 90%
- IP Rating: IP30
- Operating Temperature: -40° to +70°C
- Storage Temperature: -40° to +85°C

Approved Standards:

- CE - (EN 61000-6-3:2007 + A1:2011 + AC:2012; EN 61000-6-2:2005)
- FCC - (47 CFR Part 15 Subpart B)
- 'E' Mark - (ECE Regulation 10 Rev 05)
- IC - (ICES-003:2016 (Issue 6))
- RoHS2
- WEEE

Technical Specifications:

- Operating Voltage: 8.5 - 32 Vdc
- Max Current Consumption: ≤6.6A @ 12Vdc
- Max Inrush Current: 6.4A @ 12Vdc and 2.8A @ 24Vdc
- Power Consumption: ≤80 Watts @ 12Vdc
- TV System: PAL/NTSC/AHD
- Video Input: 8x Select Connectors (Male)
4 Channels for IP cameras via Ethernet Connector, requires POE switch
- Audio Input: 8x Camera Microphones
- Video Output: 1x Select Connector (Female)
- Audio Output: 1x Channel
- Video Input/Output: 1.0 Vp-p / 75Ω
- Video Compression: H.264
- Audio Compression: ADPCM
- Installation Direction: Internal HDD anti-vibration mount allows any mounting direction.
- Housing Material: Extruded Aluminium, Gunmetal Grey
- Weight (Control Unit Only): 2.8kg
- Dimensions (Without cables): 224mm (W) x 220.5mm (D) x 85mm (H)
- Power-up Time to Rec.: 50 seconds
- Display Split: Single, Quad or 9-Split
- Image Frame Rates: 1-25 FPS (PAL); 1-30 FPS (NTSC); 1-30 FPS (AHD)
- Image Resolution: PAL: WD1 (960x576), D1 (704x576), WHD1 (960x288), HD1 (704x288), WCIF (480x288), CIF (352x288)
NTSC: WD1 (960x480), D1 (704x480), WHD1 (960x240), HD1 (704x240), WCIF (480x240), CIF (352x240)
AHD: HD (1280x720), FULL HD (1920x1080)
- Recording Quality Setting: 1 to 8 (1 is the highest)
- Recording Duration: Minimum 142 hours (Quality 1; Res. D1; 25/30fps)
Typical 211 hours (Quality 2; Res HD1; 25/30fps)
Maximum 1862 hours (Quality 8; Res CIF; 1fps)
- Storage: 1TB 2.5" SATA HDD, 64GB SD card
- Mobile Standards: 2G / 3G / 4G (G and GW models)
- SIM Card: Standard size and Data Enabled

- Mobile Operating Bands: FDD LTE, WCDMA/HSDPA/HSUPA/HSPA+ and GSM/GPRS/EDGE (G and GW models)
- Wireless Standards: 802.11n/g/b (W and GW models)
- Wireless Security Standards: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (W and GW models)

Features:

- Remotely Access MDR units using Wireless Connectivity and/or Mobile Network Connectivity for Evidence upload to Servers. Real-time alerts of HDD malfunctions and video loss. See MDR-Dashboard features below (G, W, or GW models only)
- MDR-Dashboard 5.0 (full-featured software) has the following functions: Real-time preview, Multi-vehicle monitoring, playback of server and local video data, downloading data, evidence management, auto-download scheduling, user data management and an alarm centre. (Features are model dependant).
- Mobile applications for remote live view and snapshots on iOS and Android systems (G, W, or GW models only)
- On-screen Display Graphical User Interface
- MDR control using USB Mouse, IR Remote Control and PC via browser (Ethernet)
- MDR-Player 5.0 (portable) is able to view clippings and directories
- MDR Server 5.0 enables Windows PC to become Wi-Fi Servers and/or 4G/3G servers (G, W, or GW models only)
- Internal G-Sensor and Built-in Buzzer
- GPS for location, monitoring and tracking on playback
- Mirror Recording onto SD card
- Lockable and removable Mobile Caddy Unit (MCU) with 1TB HDD, upgradeable to 2TB
- Mobile Caddy Unit directly pluggable to PC via USB-B port (USB 3.0)
- Various Pre and Post Recording Settings
- Recording Modes: Normal, Alarm and Timer (all watermarked)
- Multi-level password protected access (Administrator; User)
- 8x Trigger Inputs, 2x Trigger Outputs and 1x 12V Power Output
- Built-in HDD Heater and Diagnostic LED Status Panel
- USB-A port on front panel for upgrades, configuration and exporting data

Package Contents:

- 1 x MDR-508XX-1000-CU Mobile Digital Recorder
- 1 x MDR-MOUSE-01 MDR Wired Mouse
- 1 x MDR-IO-01 Input / Output Cable
- 1 x MDR-PWR-01 Power Cable
- 1 x MDR-ANT-GPS-01 GPS Antenna
- 1 x MDR-ANT-MOB-01 Mobile Network Antenna (G and GW models)
- 1 x MDR-ANT-Wi-Fi-01 Wi-Fi Antenna (W and GW models)
- 1 x MDR-USB-B-02 USB A to B Cable (3.0)
- 1 x MDR-KEY-01 Security Key
- 1 x MDR-BKT-01 Brackets and 1 x MDR-BKT-FIX-01 Bracket Fixings
- 1 x MDR-EXP-FIX-01 Expansion Module Fixings
- 1 x MDR-500-IG Installation Guide
- 1 x MDR-500-CD Installation CD

Optional Accessories:

- 1 x MDR-RP-0X Remote Status & Interface Panel with Panic Button
- 1 x MDR-GS-0X External G-Sensor
- 1 x MDR-FPB-0X Fireproof box with 32GB SD card

Brigade House The Mills Station Road South Darenth Kent DA4 9BD

Technical +44 (0) 1322 420347 marketing@brigade-electronics.com www.brigade-electronics.com

Specifications Subject To Change Without Notice

PS(Various)01 - MDR-508XX-1000