

Base course timber :

- Base course timbers shall be pinned with a minimum of two (2) 19mm dia. by 500mm rebar at maximum 1200mm o.c.
- All rows of timber above base course shall be securely spiked with a minimum of two (2 x12mm dia. by 250mm spikes at maximum 1200mm o.c.
- Preservative must be applied to all end cuts.

Cap:


- shall be pre-drilled and screwed down using 1/4" structural screws treated for ACQ use and sized to suit. Screws to extend into timber base at min. 75mm and to be countersunk into cap. Two parallel screws every 600mm O.C. along length and at ends. Only use butt joints for straight sections of cap. Min. length of cap boards to be 1200mm. Install longest lengths possible.
- Shall include continuous 25mm wide bead of construction adhesive along all bottom edges of cap.

Drawing Title:

Double Timber Edging with Cap

Drawing No:

SCD-651A

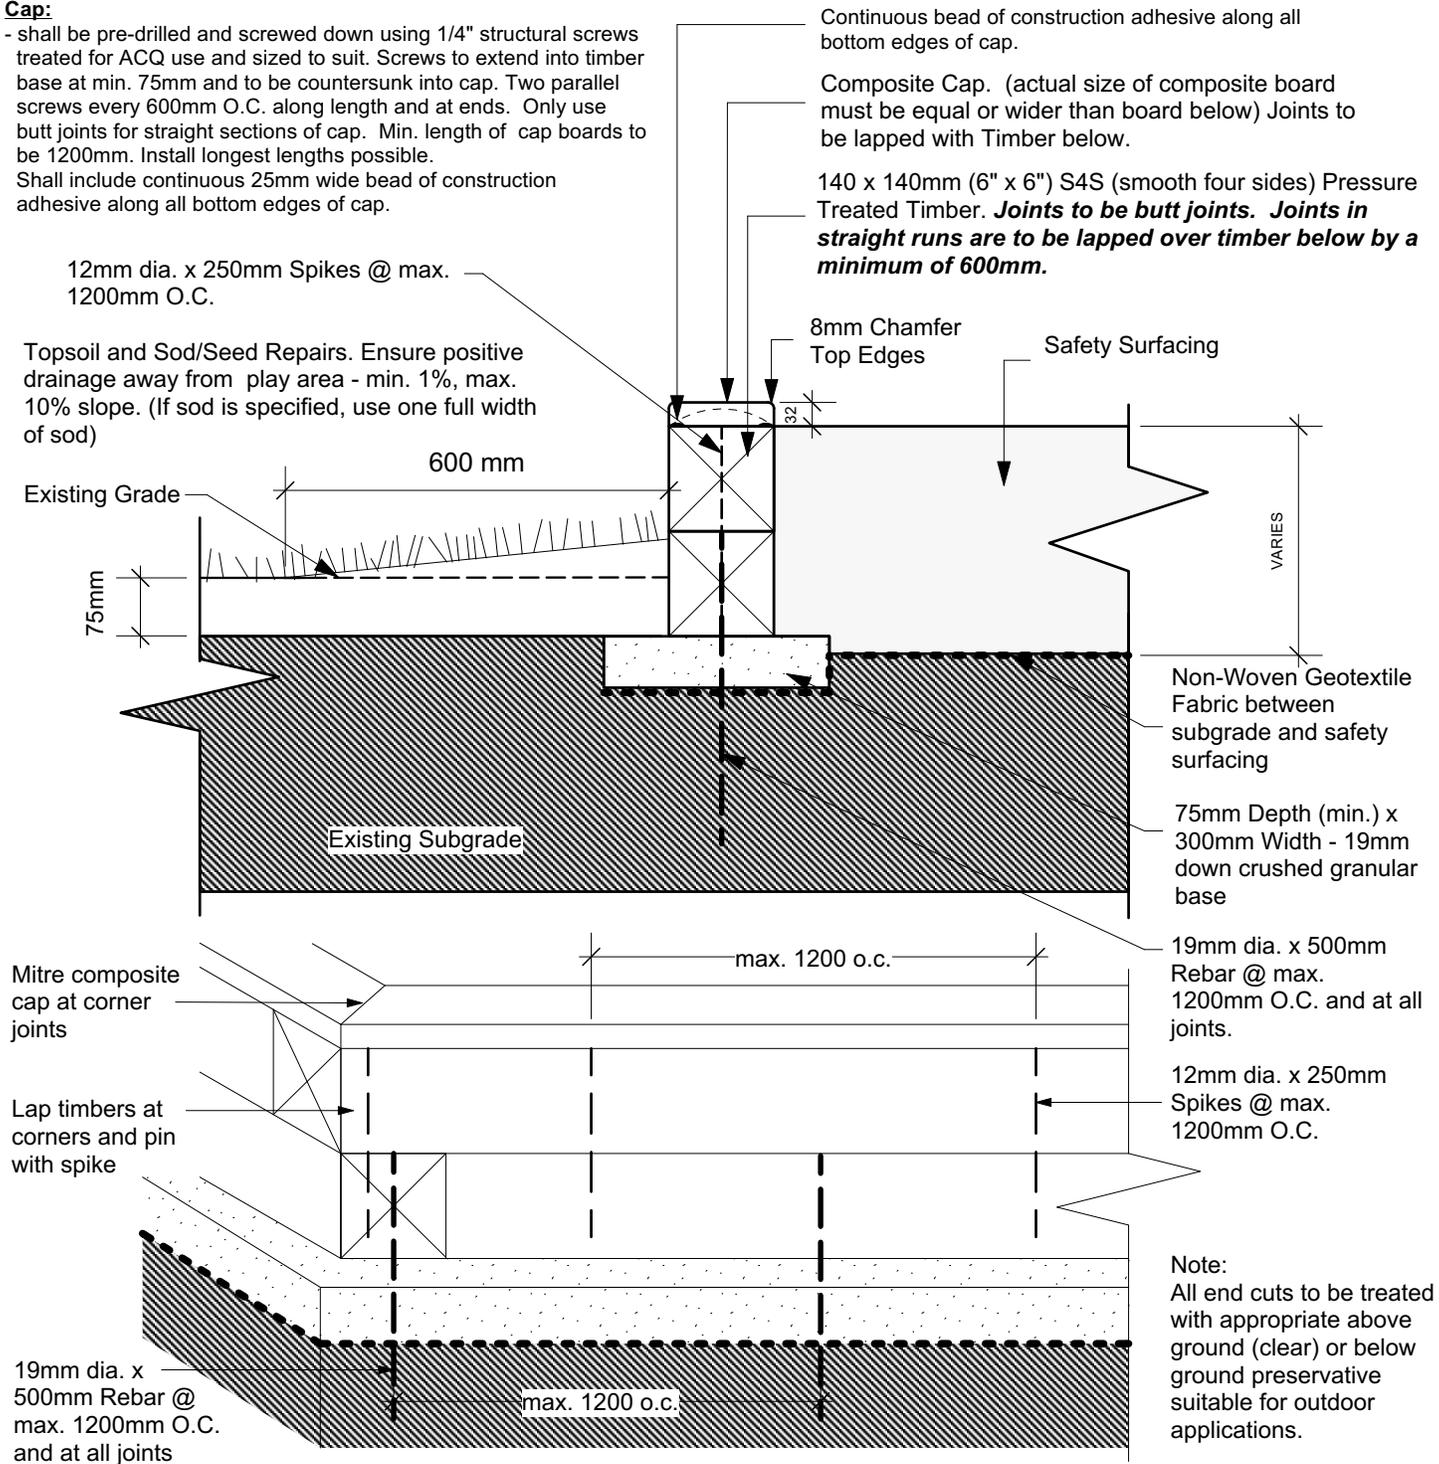

DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED

REVISION: 6
 DATE: November 8, 2022
 SCALE: NTS
 DRAWN BY: MG

The City of Winnipeg
 Planning, Property and Development Department
 Planning and Land Use Division
 Unit 15 - 30 Fort Street, Winnipeg, MB, R3C 4X5

