



Sheet Size: 24" x 36" (metric) Scale: 1:1 (metric) CAD File Name: 705-2016-bonnycastle\_park-2017-06-22.dwg

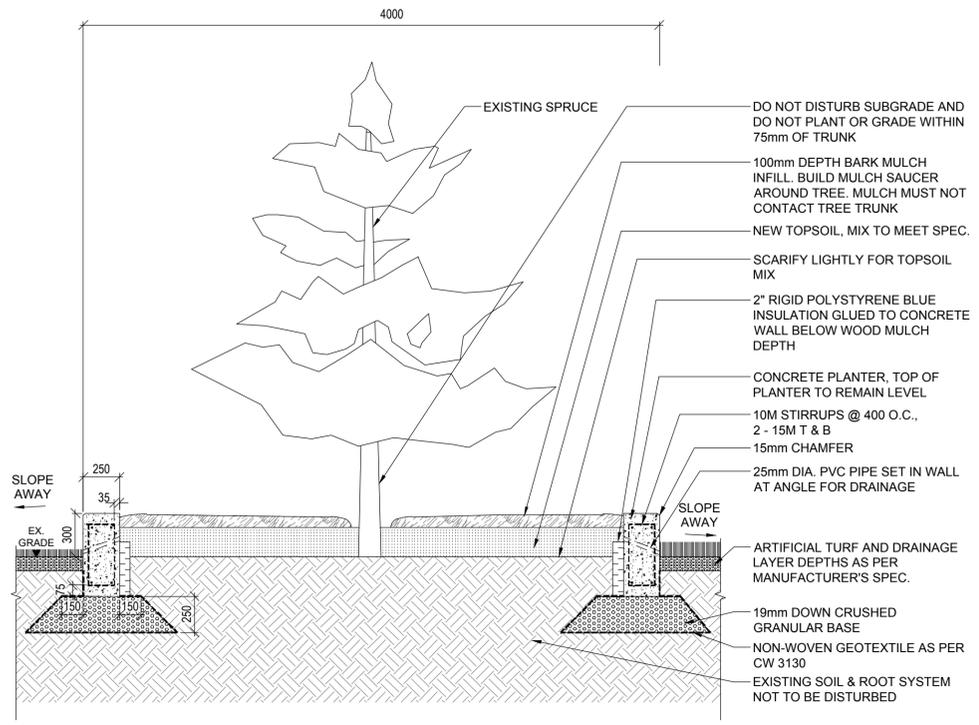

**1**  
**L6** CONCRETE SEATING WALL / PLANTER DETAILS  
SCALE - 1 : 25

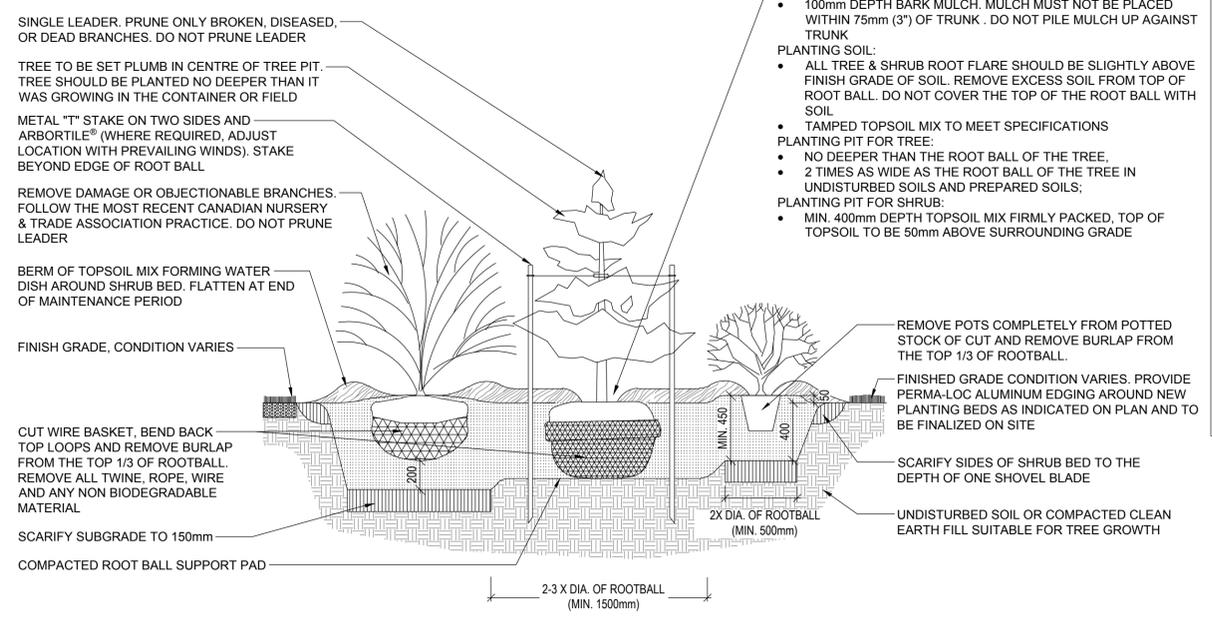

**2**  
**L6** PLANTING BED DETAILS  
SCALE - 1 : 25

- MULCH:**
- 100mm DEPTH BARK MULCH. MULCH MUST NOT BE PLACED WITHIN 75mm (3") OF TRUNK. DO NOT PILE MULCH UP AGAINST TRUNK
- PLANTING SOIL:**
- ALL TREE & SHRUB ROOT FLARE SHOULD BE SLIGHTLY ABOVE FINISH GRADE OF SOIL. REMOVE EXCESS SOIL FROM TOP OF ROOT BALL. DO NOT COVER THE TOP OF THE ROOT BALL WITH SOIL.
  - TAMPED TOPSOIL MIX TO MEET SPECIFICATIONS
  - PLANTING PIT FOR TREE:
    - NO DEEPER THAN THE ROOT BALL OF THE TREE,
    - 2 TIMES AS WIDE AS THE ROOT BALL OF THE TREE IN UNDISTURBED SOILS AND PREPARED SOILS;
  - PLANTING PIT FOR SHRUB:
    - MIN. 400mm DEPTH TOPSOIL MIX FIRMLY PACKED, TOP OF TOPSOIL TO BE 50mm ABOVE SURROUNDING GRADE
- NOTES:**
- LAYOUT OF PLANT MATERIAL TO BE APPROVED BY L.A. PRIOR TO INSTALLATION.
  - PIT TO BE DUG WITH BACK HOE NOT TREE SPADE.**
  - CONTRACTOR TO ENSURE "T-BARS DO NOT PENETRATE ROOT BALL.
  - SECURE "T-BARS TO TREE @ APPROX. 2/3 TOTAL TREE HEIGHT ABOVE FIN. GRADE.
  - TREE SHALL BE PRUNED IMMEDIATELY AFTER PLANTING TO REMOVE DEAD, BROKEN, DISEASED, DYING OR RUBBING BRANCHES. CO-DOMINANT STEMS LESS THAN 100mm (4") DIA. AT THE FORKS SHALL BE PRUNED OFF AND ONE MAIN STEM SHOULD REMAIN. TREE TOPPING OR HEADING IS NOT PERMITTED AT ANY TIME.
  - STAKES & TIES TO BE REMOVED BY CONTRACTOR AT END OF MAINTENANCE PERIOD AND UPON ACCEPTANCE BY L.A.
  - ALSO REFER TO CITY OF WINNIPEG TREE PLANTING AND MAINTENANCE SPECIFICATION.

- DETAIL NOTES**
- SUB-GRADE, SUB-BASE AND BASE COURSE CONSTRUCTION AS PER CW 3110-R18
  - GEOTEXTILE FABRIC AS PER CW 3130-R4
  - TOPSOIL AND SOD AS PER CW 3510-R9
  - ALL NOTES IN GREY INDICATE FUTURE WORK OR WORK TO BE COMPLETED BY OTHERS UNDER SEPARATE CONTRACT
  - REFER ALSO TO WRITTEN SPECIFICATIONS
  - FOR CUSTOM FENCE & BENCH - CONTRACTOR TO SUBMIT SHOP DRAWINGS WITH ENGINEER STAMPS FOR ALL STRUCTURES AND FABRICATION FOR REVIEW AND APPROVAL BY CONTRACT ADMINISTRATOR PRIOR TO CONSTRUCTION**

0	17 / 06 / 22	ISSUED FOR TENDER	DM
REV	YY / MM / DD	DESCRIPTION	BY

A. SECTION LETTER OR DETAIL NUMBER.	SEAL				
B. DRAWING WHERE SECTION OR DETAIL IS DRAWN,					
OR					
DRAWING WHERE SECTION OR DETAIL IS INDICATED.					
--- SECTION OR DETAIL SHOWN ON SAME DRAWING.					
<table border="1"> <tr> <td style="border: none;">A</td> <td style="border: none;">A</td> </tr> <tr> <td style="border: none;">B</td> <td style="border: none;">---</td> </tr> </table>	A	A	B	---	
A	A				
B	---				

**SCATLIFF + MILLER + MURRAY**  
visionary urban design + landscapes

CLIENT  
**CITY OF WINNIPEG**

PROJECT  
**BONNYCASTLE PARK IMPROVEMENT**

TITLE  
**LANDSCAPE DETAILS 1**

DESIGN	DRAWN	DATE - Y / M / D	SCALE
DM	WF	2017/05/17	11X17 - 1:200 22X34 - 1:100
CHECKED	APPROVED	JOB NO.	DRAWING NO.
DM	DM	705-2016	<b>L6</b>