90 SINCLAIR ST.
BUILDING SIGNAGE
UPGRADES
90 SINCLAIR STREET
WINNIPEG, MANITOBA

Project Number: 1709

Drawing Title:

SIGNAGE LETTERING
DETAILS


Issue/Revision Date


Issue/Revision Do


1 ISSUED FOR 16 OCT


Sheet No:


his drawing is property of the Architect and can be reproduced or used without the consent of the vachitect. The contractor is responsible for check and verifying all levels and dimensions and shall export all discrepancies to the Architect and obtained the contract of the contract of

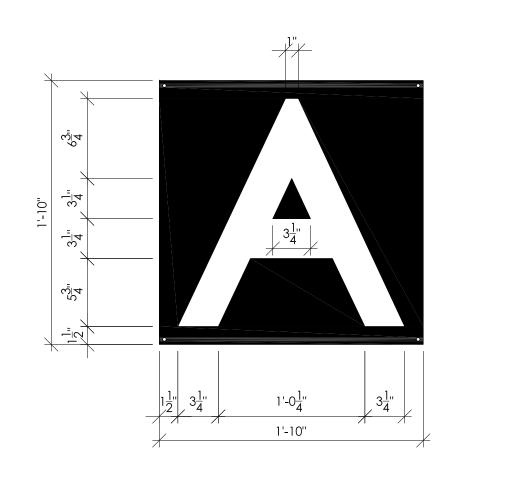


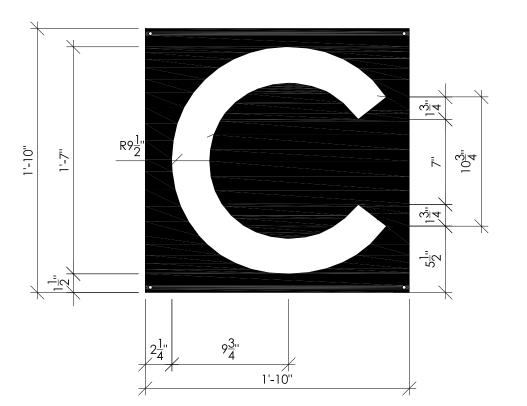


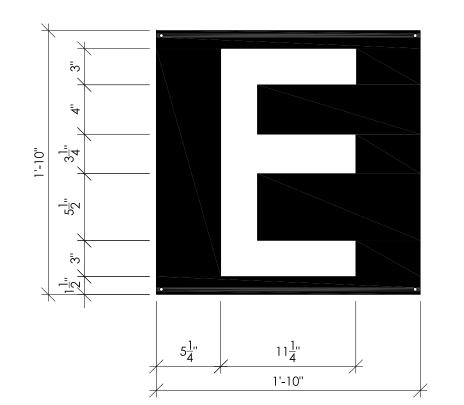


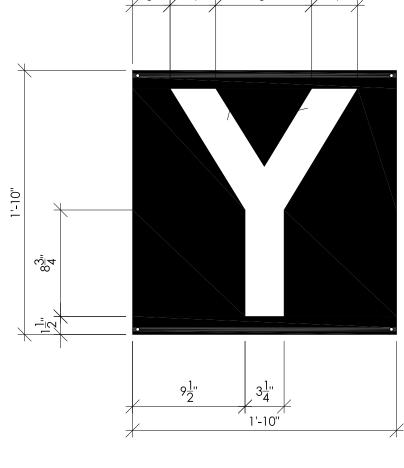


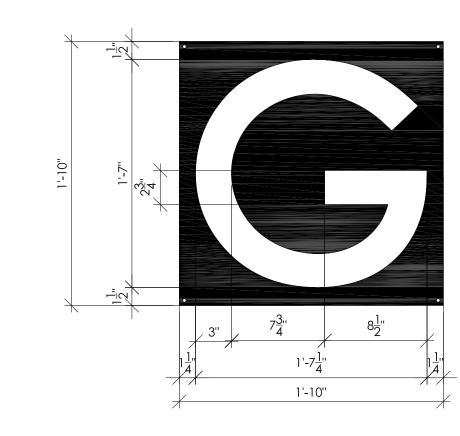


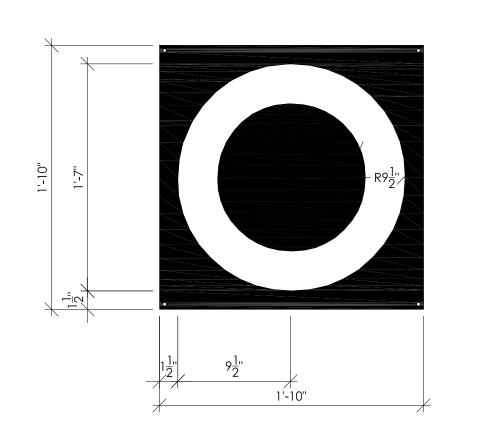


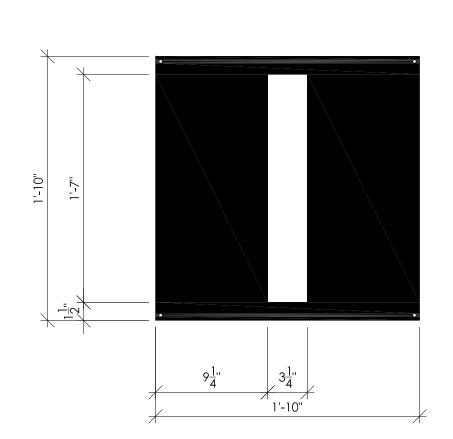


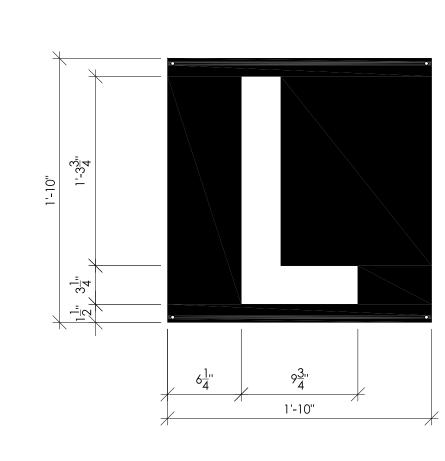


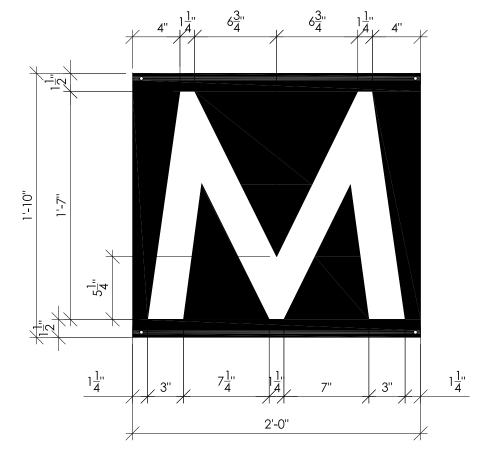


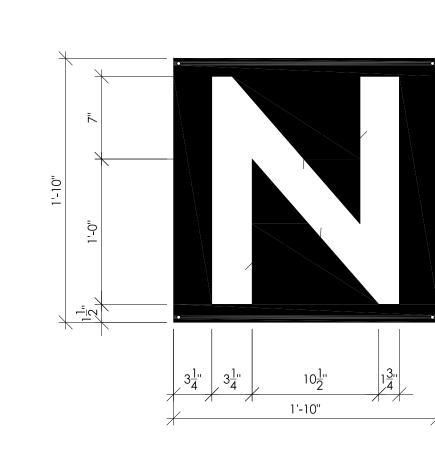

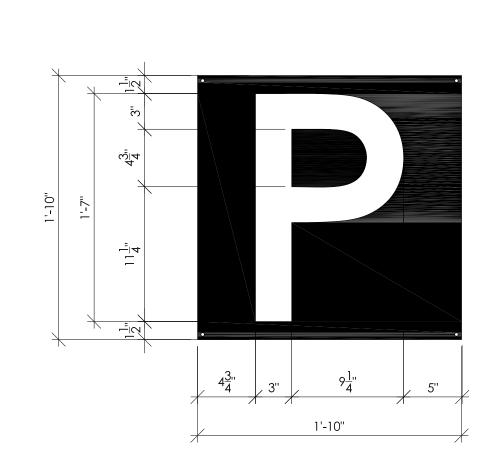

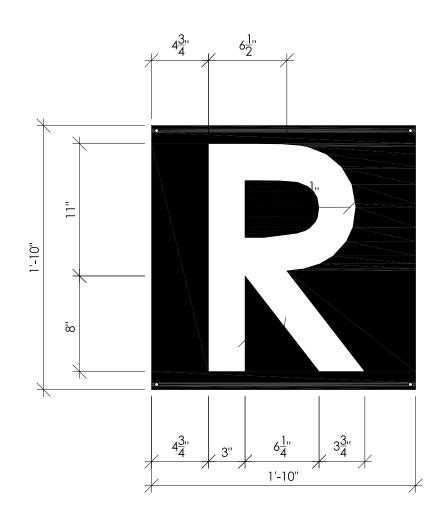

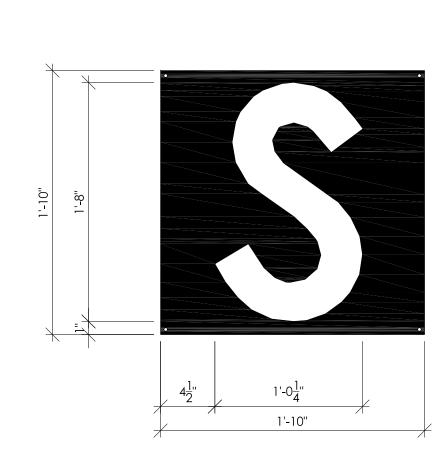

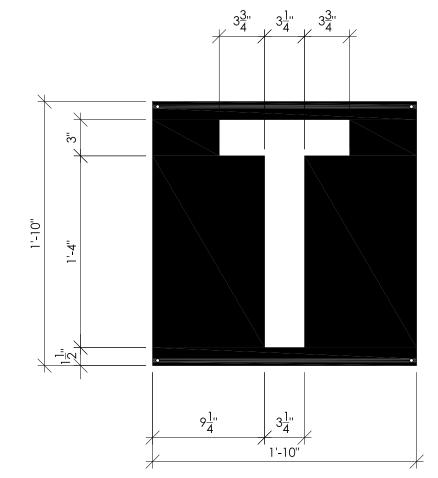

SIGNAGE LETTERING NOTES:

- CNC CUT ALUMINUM LETTERS, 1/4" THICK
- FONT: GIL SANS MT
- FINISH: POWDER-COATED, SATIN; ENSURE ALL EXPOSED SIDES ARE FINISHED. COLOUR TO MATCH EXISTING DARK GREY STUCCO (CONTRACT ADMINISTRATOR TO SELECT FINAL COLOUR)
- MOUNT: LETTERING TO BE FASTENED DIRECTLY TO EXISTING GALVANIZED GUARDRAIL USING
 GALVANIZED MECHANICAL FASTENERS TO MATCH EXISTING.
 EACH ALUMINUM CUT-OUT "POSITIVE" LETTER TO BE C/W 4 PRE-DRILLED HOLES AT OUTER COR

EACH ALUMINUM CUT-OUT "POSITIVE" LETTER TO BE C/W 4 PRE-DRILLED HOLES AT OUTER CORNERS (LETTER 'I' TO HAVE 2 PRE-DRILLED HOLES). ENSURE FASTENER LOCATIONS ALIGN W/ GUARDRAIL LOCATION.

EACH ALUMINUM SQUARE "NEGATIVE" LETTER TO BE C/W 4 PRE-DRILLED HOLES (1 AT EACH CORNER). ENSURE FASTENER LOCATIONS ALIGN W/ GUARDRAIL LOCATION.

*REFER TO PAGE A2 FOR MOUNTING LOCATION