

EMERGENCY SIGN AND LIGHTING SCHEDULE						
TAG	DESCRIPTION	MANUFACTURER	CATALOG No.	VOLTS	BRANCH CIRCUIT	
EBB-1	INTEGRAL ZONE SENSING CONTROL PANEL,BATTERY UNIT W/ 2-LAMP, SHELF	AIMLITE	EBST-ZNSC-12V-200-2MB- LED-120-AT-ZTS-ZPL	120V - 12V	EXISTING	
E-1	RUNNING MAN SIGN	AIMLITE	RPST-U-M-WHT	120/347VAC		
₩	DOUBLE REMOTE LAMP	AIMLITE	RMMB-2-12-3.7L-WHT	12V		

ELECTRICAL RENOVATION NOTES: "["x"]"

ALSO SEE NOTES & SPECIFICATIONS.
ALL WIRING & CABLING IN CEILING SPACE SHALL BE PLENUM RATED AS PER LATEST CEC.
IF REQUIRED, PROVIDE WIRE, CONDUIT, END-OF-LINE RESISTORS & BOOSTER POWER

1. REPLACE EXISTING EMERGENCY BATTERY BANK 2-HEAD UNIT WITH NEW INTEGRAL ZONE SENSING CONTROL PANEL/BATTERY/2-LAMP UNIT (EBB-1). WIRE TO MONITOR LIGHTING CIRCUIT EM3-1. WIRE TO NEW EXIT SIGNS & 2-HEAD REMOTE EMERGENCY LAMPS IN EOC.

2. REINSTALL & RECONNECT (IF DISCONNECTED) EXISTING CEILING SMOKE DETECTORS TO EXISTING CIRCUIT.


3. PROVIDE NEW SMOKE DETECTORS & COMPONENTS IF REQUIRED TO CONNECT TO EXISTING CIRCUIT.

4. PROVIDE NEW COMBINATION HORN STROBE (MATCH EXISTING) & CONNECT TO EXISTING CIRCUIT. MOUNT 96"AFF.

NOTES:

REFER TO DRAWING E1.

INSTALLATION SHALL BE IN CONFORMANCE WITH CAN/ULC-S524-M, STANDARD FOR INSTALLATION OF FIRE ALARM SYSTEMS. PERFORM A FIRE ALARM VERIFICATION WITH REPORT IN CONFORMANCE WITH CAN/ULC-S537, STANDARD FOR VERIFICATION OF FIRE ALARM SYSTEMS FOR ZONES AFFECTED.

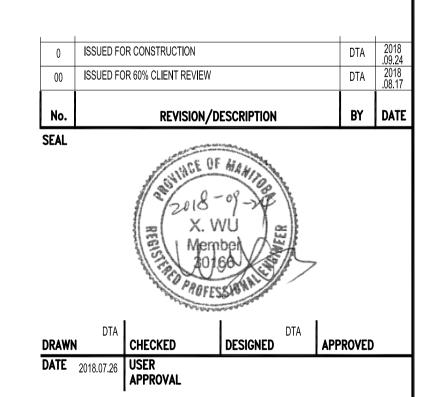



THE CITY OF WINNIPEG
PLANNING, PROPERTY AND
DEVELOPMENT DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION
3-65 GARRY STREET, R3C 4K4

PROJECT
COUNCIL BUILDING

EMERGENCY OPERATIONS CENTRE RENOVATIONS

510 MAIN STREET

BID OPPORTUNITY: 870-2018

SHEET TITLE

PARTIAL BASEMENT REFLECTED CEILING PLAN RENOVATION

FIRE ALARM AND EMERGENCY LIGHTING

AS SHOWN 2018-010 SHEET No: