
SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION		
SEWER ID S-MA50004097		
DISTANCE FROM MH50003560		
DISTANCE	DIAMETER	CLOCK
8.5	150	10:00
12.9	150	2:00
18.6	150	10:00
27.6	150	10:00
28.6	150	2:00
37.1	150	2:00
38.7	200	10:00
43.3	150	2:00
49.0	150	11:00
58.9	150	11:00
58.9	150	1:00
68.8	150	10:00
73.7	150	2:00
76.1	150	12:00

ST. MARY'S ROAD



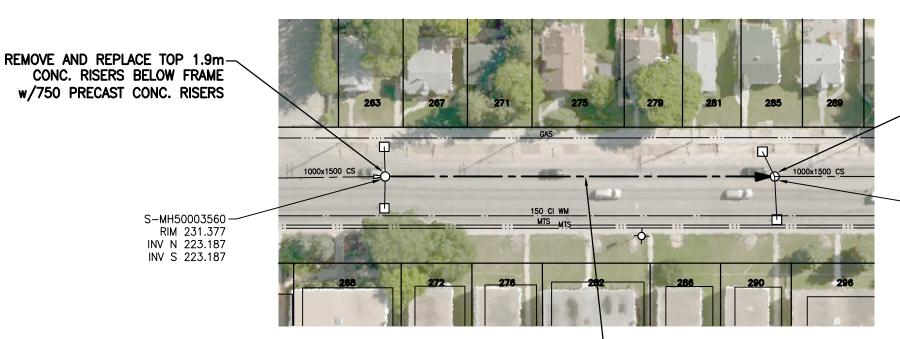

REMOVE AND REPLACE TOP 0.35m CONC. RISERS BELOW FRAME w/750 PRECAST CONC. RISERS

S-MH50003561 RIM 231.357 INV N 223.097 INV S 223.097

-77.5 OF 1000×1500 CONC CS TO BE LINED S-MA50004097 (FULLY DETERIORATED)

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

- 1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
- 2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.
- SEE PROVINCIAL REGULATION 140/92 FOR DETAILS



Certificate of Authorization Stantec Consulting Ltd.

No. 1301

METRIC WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES

TENDER NO. 212-2022

FOR INDEX SEE 13042



THE CITY OF WINNIPEG WATER AND WASTE DEPARTMENT

2022 SEWER RENEWALS BY CIPP LINING (LARGE DIAMETER) CONTRACT 3

ST. MARY'S ROAD

Ist MH S OF CONISTON ST


09 12 CAD FILE DRAWING NUMBER 20592c-101.dwg CITY DRAWING NUMBER

13049 TO 2nd MH S OF CONISTON ST

LOCATION A	APPROVED
UNDERGROUND	STRUCTURES

SUPV. U/G STRUCTURES DATE COMMITTEE

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

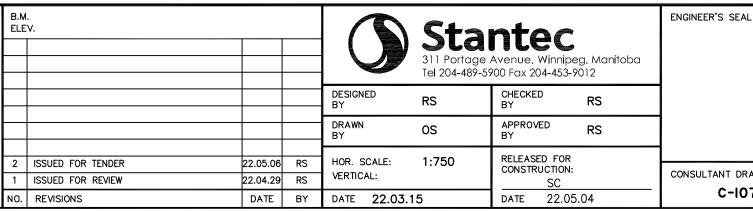

CONSULTANT DRAWING NO. C-107