




1 SECTION
SCALE: 1" = 1'-0"

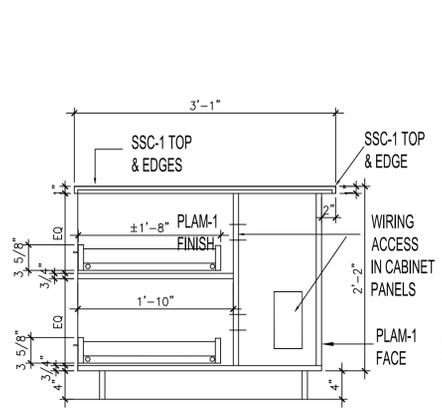


2 SECTION
SCALE: 1" = 1'-0"

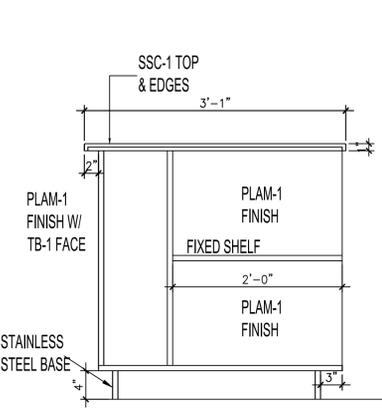


3 SECTION
SCALE: 1" = 1'-0"

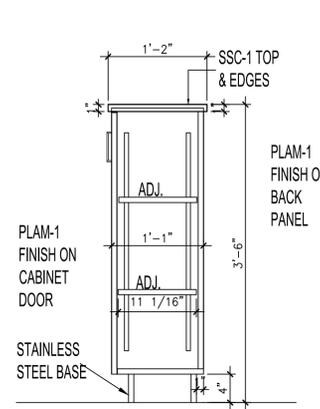


4 SECTION
SCALE: 1" = 1'-0"

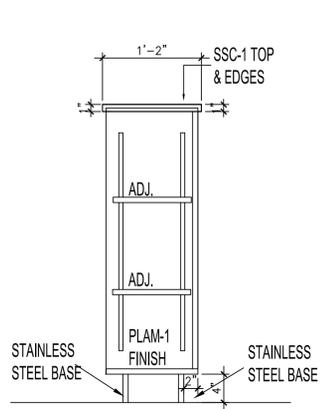


5 SECTION
SCALE: 1" = 1'-0"

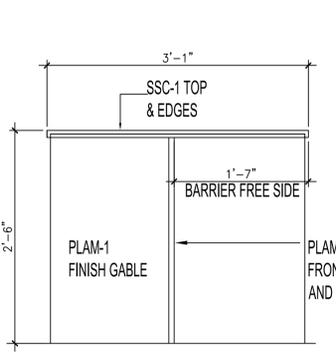


6 SECTION-
SCALE: 1" = 1'-0"

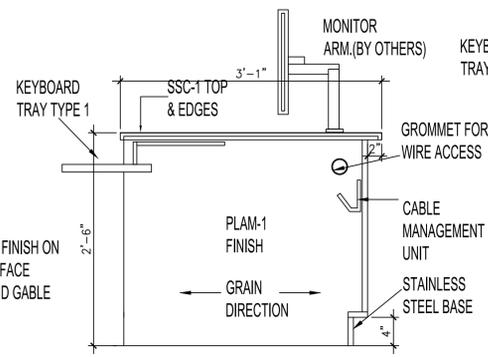

7 SECTION
SCALE: 1" = 1'-0"

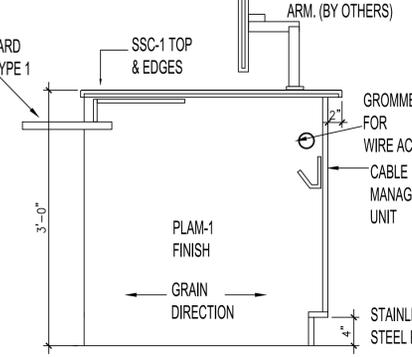

8 SECTION
SCALE: 1" = 1'-0"

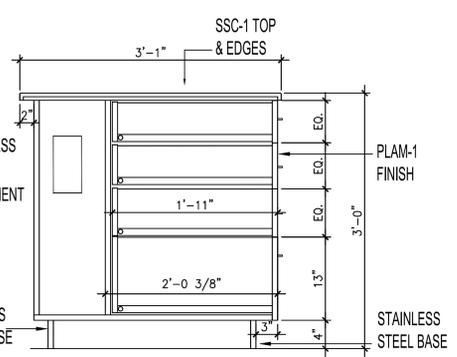

9 SECTION
SCALE: 1" = 1'-0"

MILLWORK HARDWARE SPECIFICATIONS:

DRAWER SLIDES:

MODEL: BLUM MOVENTO 760H -40KG
EXTENSION SLOW CLOSE SLIDE TO MATCH CABINET SIZE;
INSTALL TYPE: CONCEALED UNDERMOUNT

DRAWER/DOOR HANDLES:

MODEL: HAFELE # 117.05.610 VERANDA COLLECTION
SIZE: 192 mm (7 INCHES)
FINISH: 304 STAINLESS STEEL

DOOR HINGES:

MODEL: BLUM CLIPTOP BLUMOTION SOFT CLOSE HINGE 110 DEGREE
PRODUCT: KNOCK IN # 71 B 3580
FINISH: NICKEL PLATED FINISH

DRAWER/DOOR LOCKS: (AS REQUIRED)

HAFELE CYLINDER MODULE
MODEL: 235.08.358

SHELF SUPPORTS: (TO SUIT CABINET)

HAFELE 255 SERIES PILASTER STANDARDS; KV; 5/8" X 3/16" 23 GA
MODEL: 255 AL 18

- REFER TO N.M.S SECTIONS : 06 02 00 ROUGH CARPENTRY; 06 04 00 ARCHITECTURAL WOODWORK AND 12 36 61 SOLID SURFACING FOR STANDARD OF CONSTRUCTION FOR ALL MILLWORK. MILLWORK CONTRACTOR TO HAVE MINIMUM 5-7 YEARS OF EXPERIENCE.
- SHOP DRAWINGS AND SAMPLES TO BE SUBMITTED TO CONTRACT ADMINISTRATOR FOR APPROVAL PRIOR TO CONSTRUCTION.
- SITE MEASUREMENTS REQUIRED PRIOR TO CONSTRUCTION.
- CONFIRM ALL GROMMET LOCATIONS PRIOR TO CUTTING. GROMMET COLOR- GREY OR BLACK FOR SOLID SURFACE COUNTERTOPS.
- ALL MILLWORK CONSTRUCTION IS TO BE 3/4" THICK REGULAR GRADE PLYWOOD WITH PLAM-1 FINISH.
- SAMPLES TO BE SUBMITTED TO CONTRACT ADMINISTRATOR FOR APPROVAL PRIOR TO CONSTRUCTION.

FINISHES:

PLAM-1: HPL PLASTIC LAMINATE
MANUFACTURER: FORMICA
PRODUCT: HPL LAMINATE-VERTICAL INSTALL;
COLOR: AGED ASH # 8844-WR
GRAIN DIRECTION: HORIZONTAL INSTALL
LOCATION: REFERENCE DESK FRONT CURVED FACE, DRAWERS, ADJUSTABLE SHELVES AND BODY GABLE CONSTRUCTION
DESK BODY CONSTRUCTION: 3/4" THICK REGULAR GRADE PLYWOOD

CPT-1: CARPET TILE (INSTALL ONLY - PRODUCT ON SITE)
SHAW CONTRACT
STYLE: REPARTEE 59387
COLOR: EVENING SATIRE 87505
SIZE: 24"X24" (61 cm x 61 cm)
INSTALLATION: QUARTER TURN, LOW-VOC ADHESIVE
NOTE: PRODUCT ON SITE FOR REPAIRS ONLY AS REQUIRED

RF-1: RUBBER FLOORING (SUPPLY & INSTALL)
ROPPE
STYLE: RECOIL FITNESS FLOORING
COLOUR: SUNFLOWER 603
SIZE: 36"X36" (914.4 mm x 914.4 mm)
GAUGE: 1/4"
EDGE: SQUARE EDGE PROFILE
10% CHIP CONTENT
INSTALLATION: GLUE-DOWN, LOW-VOC ADHESIVE
INSTALL PATTERN: ASHLAR

SSC-1: SOLID SURFACE COUNTERTOP
MANUFACTURER: CORIAN
COLOR: LAVA ROCK
THICKNESS: 1/2" THICK (12.7mm)
SHEEN: MATTE FINISH-POLISHED
EDGE PROFILE: EASED EDGE
LOCATION: REFERENCE DESK COUNTERTOPS
REFER TO DRAWINGS

S.S-1: STAINLESS STEEL TOE BASE
18 GAUGE S.S TYPE 304 #4 POLISHED
LOCATION: CABINET BASE AS INDICATED ON DRAWINGS.

TB-1: TACKBOARD
MANUFACTURER: FORBO FLOORING SYSTEMS
COLOR: TO BE SELECTED BY CITY OF WINNIPEG
LOCATION: CURVED FRONT ON DESK AS INDICATED

TR-1: TRANSITION STRIP
MANUFACTURER: TARKETT-WHEELED TRAFFIC TRANSITION
COLOR: BLACK
PROFILE: TO SUIT FLOORING PRODUCTS. SITE CONFIRM WITH CITY OF WINNIPEG CONTRACT ADMINISTRATOR.
LOCATION: REFER TO DRAWINGS AS INDICATED

GENERAL NOTES

- THESE DRAWINGS SHALL NOT BE SCALED.
- THE CONTRACTOR SHALL VISIT THE SITE AND SATISFY ONESELF ALL DIMENSIONS, DATUM AND DETAILED INFORMATION SHOWN ARE CORRECT.
- THE CONTRACTOR IS TO REVIEW AND COORDINATE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL AND STRUCTURAL DRAWINGS FOR ADDITIONAL OPENINGS THROUGH FLOORS, WALLS, AND CEILINGS FOR DUCT, PIPE & ELECTRICAL RISERS AND ALL OPENINGS NOT SHOWN ON DRAWINGS.
- ALL OPENINGS THROUGH FIRE ASSEMBLIES ARE TO BE FIRE STOPPED AND SEALED WITH ULC APPROVED FIRE STOPPING TO MAINTAIN THE INTEGRITY OF THE FIRE SEPARATION, AND PROVIDE A SMOKE-TIGHT BARRIER.
- ALL PRODUCTS AND MATERIALS TO BE USED AND INSTALLED SHALL CONFORM WITH MANUFACTURER'S SPECIFICATIONS & APPLICABLE CODES.
- THE CONTRACTOR SHALL BE RESPONSIBLE TO PATCH AND MAKE GOOD ALL EXISTING CONSTRUCTION AFFECTED BY THE REMOVAL OF ALL ITEMS FORMING THE PART OF THE RENOVATION WORK.
- WHERE NEW FLOORING AND BASE IS TO BE INSTALLED IN EXISTING AREAS (REFER TO FLOOR PLAN AND ROOM SCHEDULE) THE EXISTING FLOORING SURFACE AND BASE MUST BE REMOVED, UNLESS OTHERWISE NOTED. ALL FLOOR SURFACES SHALL BE PREPARED IN ACCORDANCE TO MANUFACTURER'S RECOMMENDATIONS FOR INSTALLATION OF NEW FLOOR.
- WHERE PAINTING OF EXISTING WALLS IS INDICATED ON THE ROOM SCHEDULE, THESE WALLS MUST BE CLEANED OF ANY EXISTING WALL COVERING, PATCHED & PREPARED TO ACCEPT NEW MATERIAL, UNLESS OTHERWISE NOTED.

ASBESTOS

ASBESTOS MAYBE PRESENT BEHIND WALLS, CEILING SPACES & FLOORS. IF ASBESTOS OR ANY HAZARDOUS MATERIAL IS FOUND, STOP WORK IMMEDIATELY AND CONTACT CITY OF WINNIPEG CENTRAL CONTROLS @ 204 986-2351.

No.	REVISION/DESCRIPTION	BY	DATE
0	CONSTRUCTION	KJN	01-10 2024

TENDER # 1080-2023

DRAWN	CHECKED	DESIGNED	APPROVED
DATE: 2024.01.10	USER APPROVAL		

THE CITY OF WINNIPEG
ASSETS & PROJECT MANAGEMENT
DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION
3-65 GARRY STREET, R3C 4K4

PROJECT
MILLENNIUM LIBRARY
NEW READER SERVICES DESK

251 DONALD STREET

SHEET TITLE
MILLWORK SECTIONS

SCALE	PROJECT No:	SHEET No:
AS SHOWN	2023-067	A4