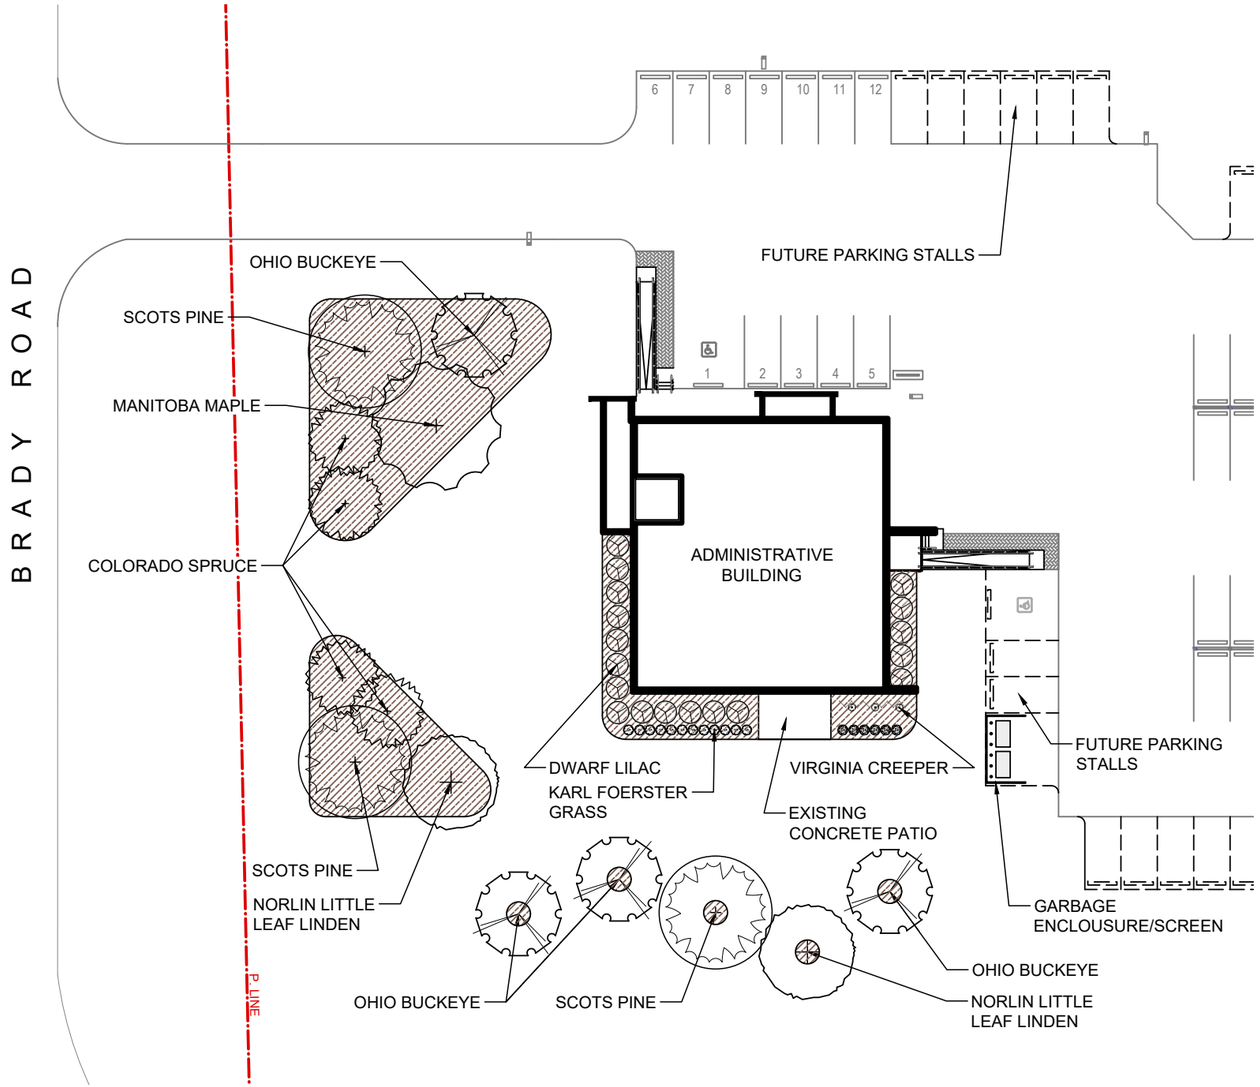

1 ADMIN BUILDING PLANTING PLAN

SCALE - 1 : 500

0 5 10 25m

N

LEGEND:

SURFACING WOOD MULCH

PROPERTY LINE

PROPOSED PLANTING

PLANT SCHEDULE - ADMIN BUILDING

SYMBOL	QTY	COMMON NAME	BOTANICAL NAME	SIZE AND REMARKS (shown are minimum specifications)	SPACING
TREES					
	1	Manitoba Maple	*Acer negundo*	65mm Caliper, 3500-4000mm Ht., min. 700mmØ rootball, Straight sturdy trunks, well-branched and balanced, min. 10 major branches 2000mm above grade, B & B or tree mover, wire basket.	7500mm or As Shown
	2	Norlin Littleleaf Linden	*Tilia cordata 'Ronald'*	65mm Caliper, 3500-4000mm Ht., min. 700mmØ rootball. Straight sturdy trunks, well-branched and balanced head, min. 10 major branches 2000mm above grade. B & B or tree mover, wire basket.	As Shown
	4	Ohio Buckeye	*Aesculus glabra*	50mm Caliper, 2400-3000mm Ht., min. 600mmØ rootball. Well-branched and balanced, min. 10 major branches. B & B or tree mover, wire basket.	5,000mm O.C. or As Shown
CONIFEROUS TREES					
	3	Scots Pine	*Pinus sylvestris*	2400mm Ht., 900mm base width,min. 900mm wide rootball. Single upright (no broken) leader, well-branched, full form 360° to grade. Machine dug. Root flare to be visible	12'-0"
	4	Colorado Spruce	*Picea pungens*	Evenly branched, full bushy trees, no broken leaders, well branched to grade B & B or tree mover, wire basket. Guy wire	As Shown
SHRUBS					
	18	Dwarf Lilac	*Syringa Meyeri*	400 mm Height. MIN. 4 major basal branches. Well formed, bushy plants, even form	As Shown
GRASSES					
	18	Karl Foerster Feather Reed Grass	*Calamagrostis acutiflora 'Karl Foerster'*	#1 Container. 2 year old plants. Well developed root system	As Shown
VINES					
	3	Virginia Creeper	*Parthenocissus quinquefolia*	#1 Container. Well developed root system. Min. 3 runners	As Shown

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE (YYYY/MM/DD)	BY
0	ISSUED FOR TENDER	2023/08/22	IY

SCATLIFF + MILLER + MURRAY
visionary urban design + landscapes

DESIGNED BY	AJ	CHECKED BY	IY
DRAWN BY	AJ/DT	APPROVED BY	CO
SCALE: HORIZONTAL	1:500	RELEASED FOR CONSTRUCTION	
VERTICAL			
DATE	2023 08 22	DATE	

PLOT DATE: 2023 08 22

SEAL
the manitoba association of landscape architects
ANDREW JOHNSON
Member No. 149

CONSULTANT DRAWING NUMBER
–

BID OPPORTUNITY: ###-20##
CONTRACT NUMBER: #

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
SOLID WASTE DIVISION

2023 BRRMF LANDSCAPING
AND TREE PLANTING PROJECT
LANDSCAPE SITE PLAN
ADMINISTRATION BUILDING
PLANTING PLAN

SHEET 2 OF 5

CITY DRAWING NUMBER
1-0400C-B0001-001