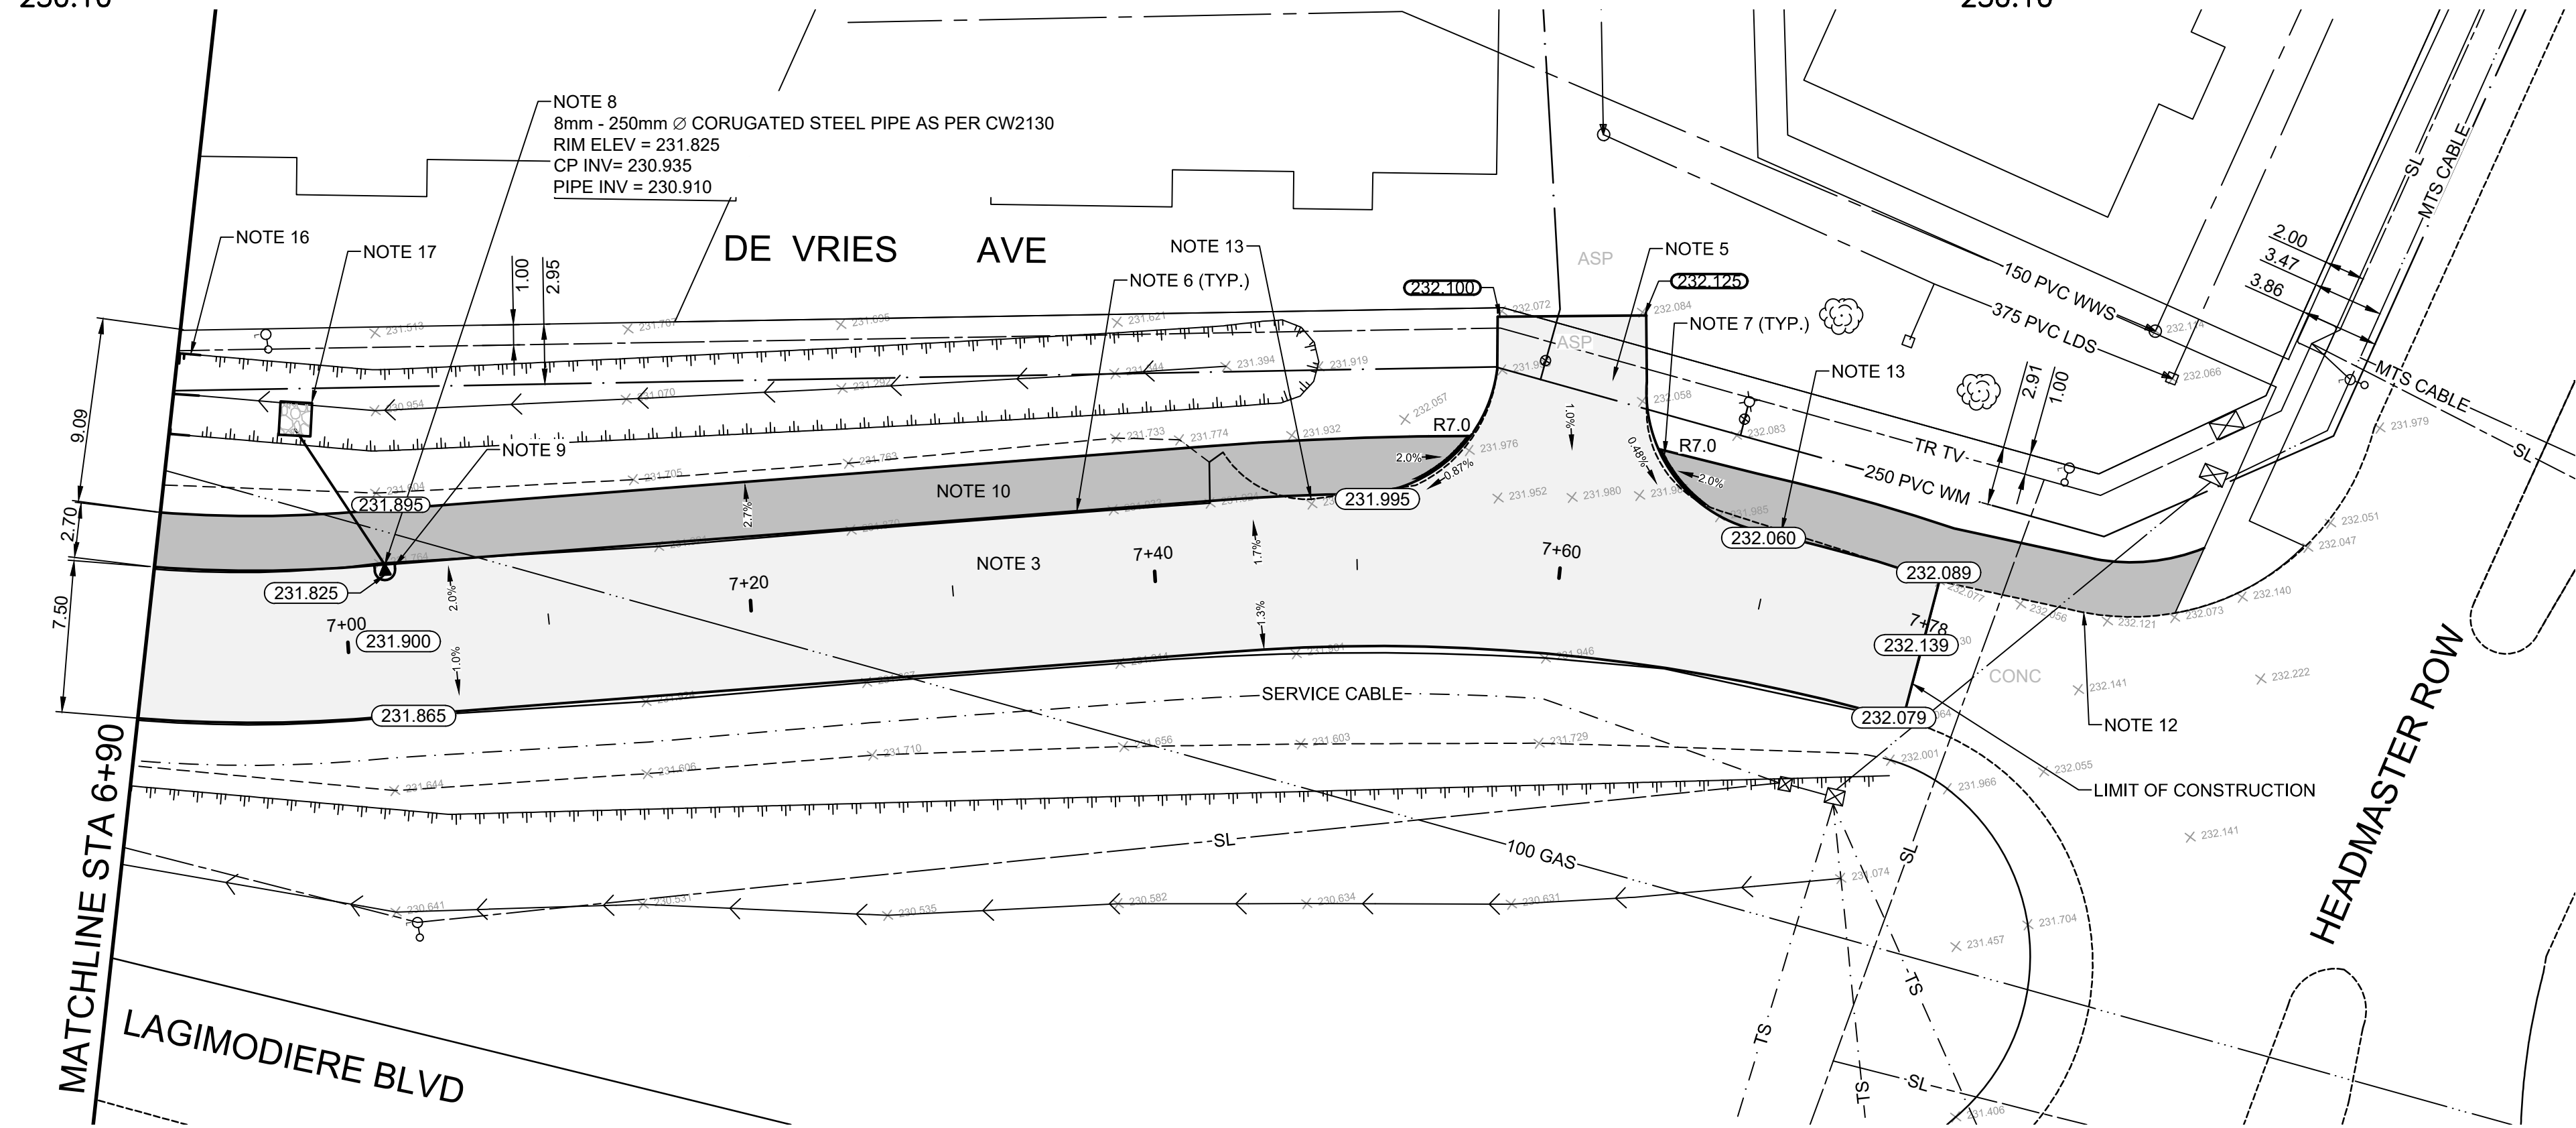
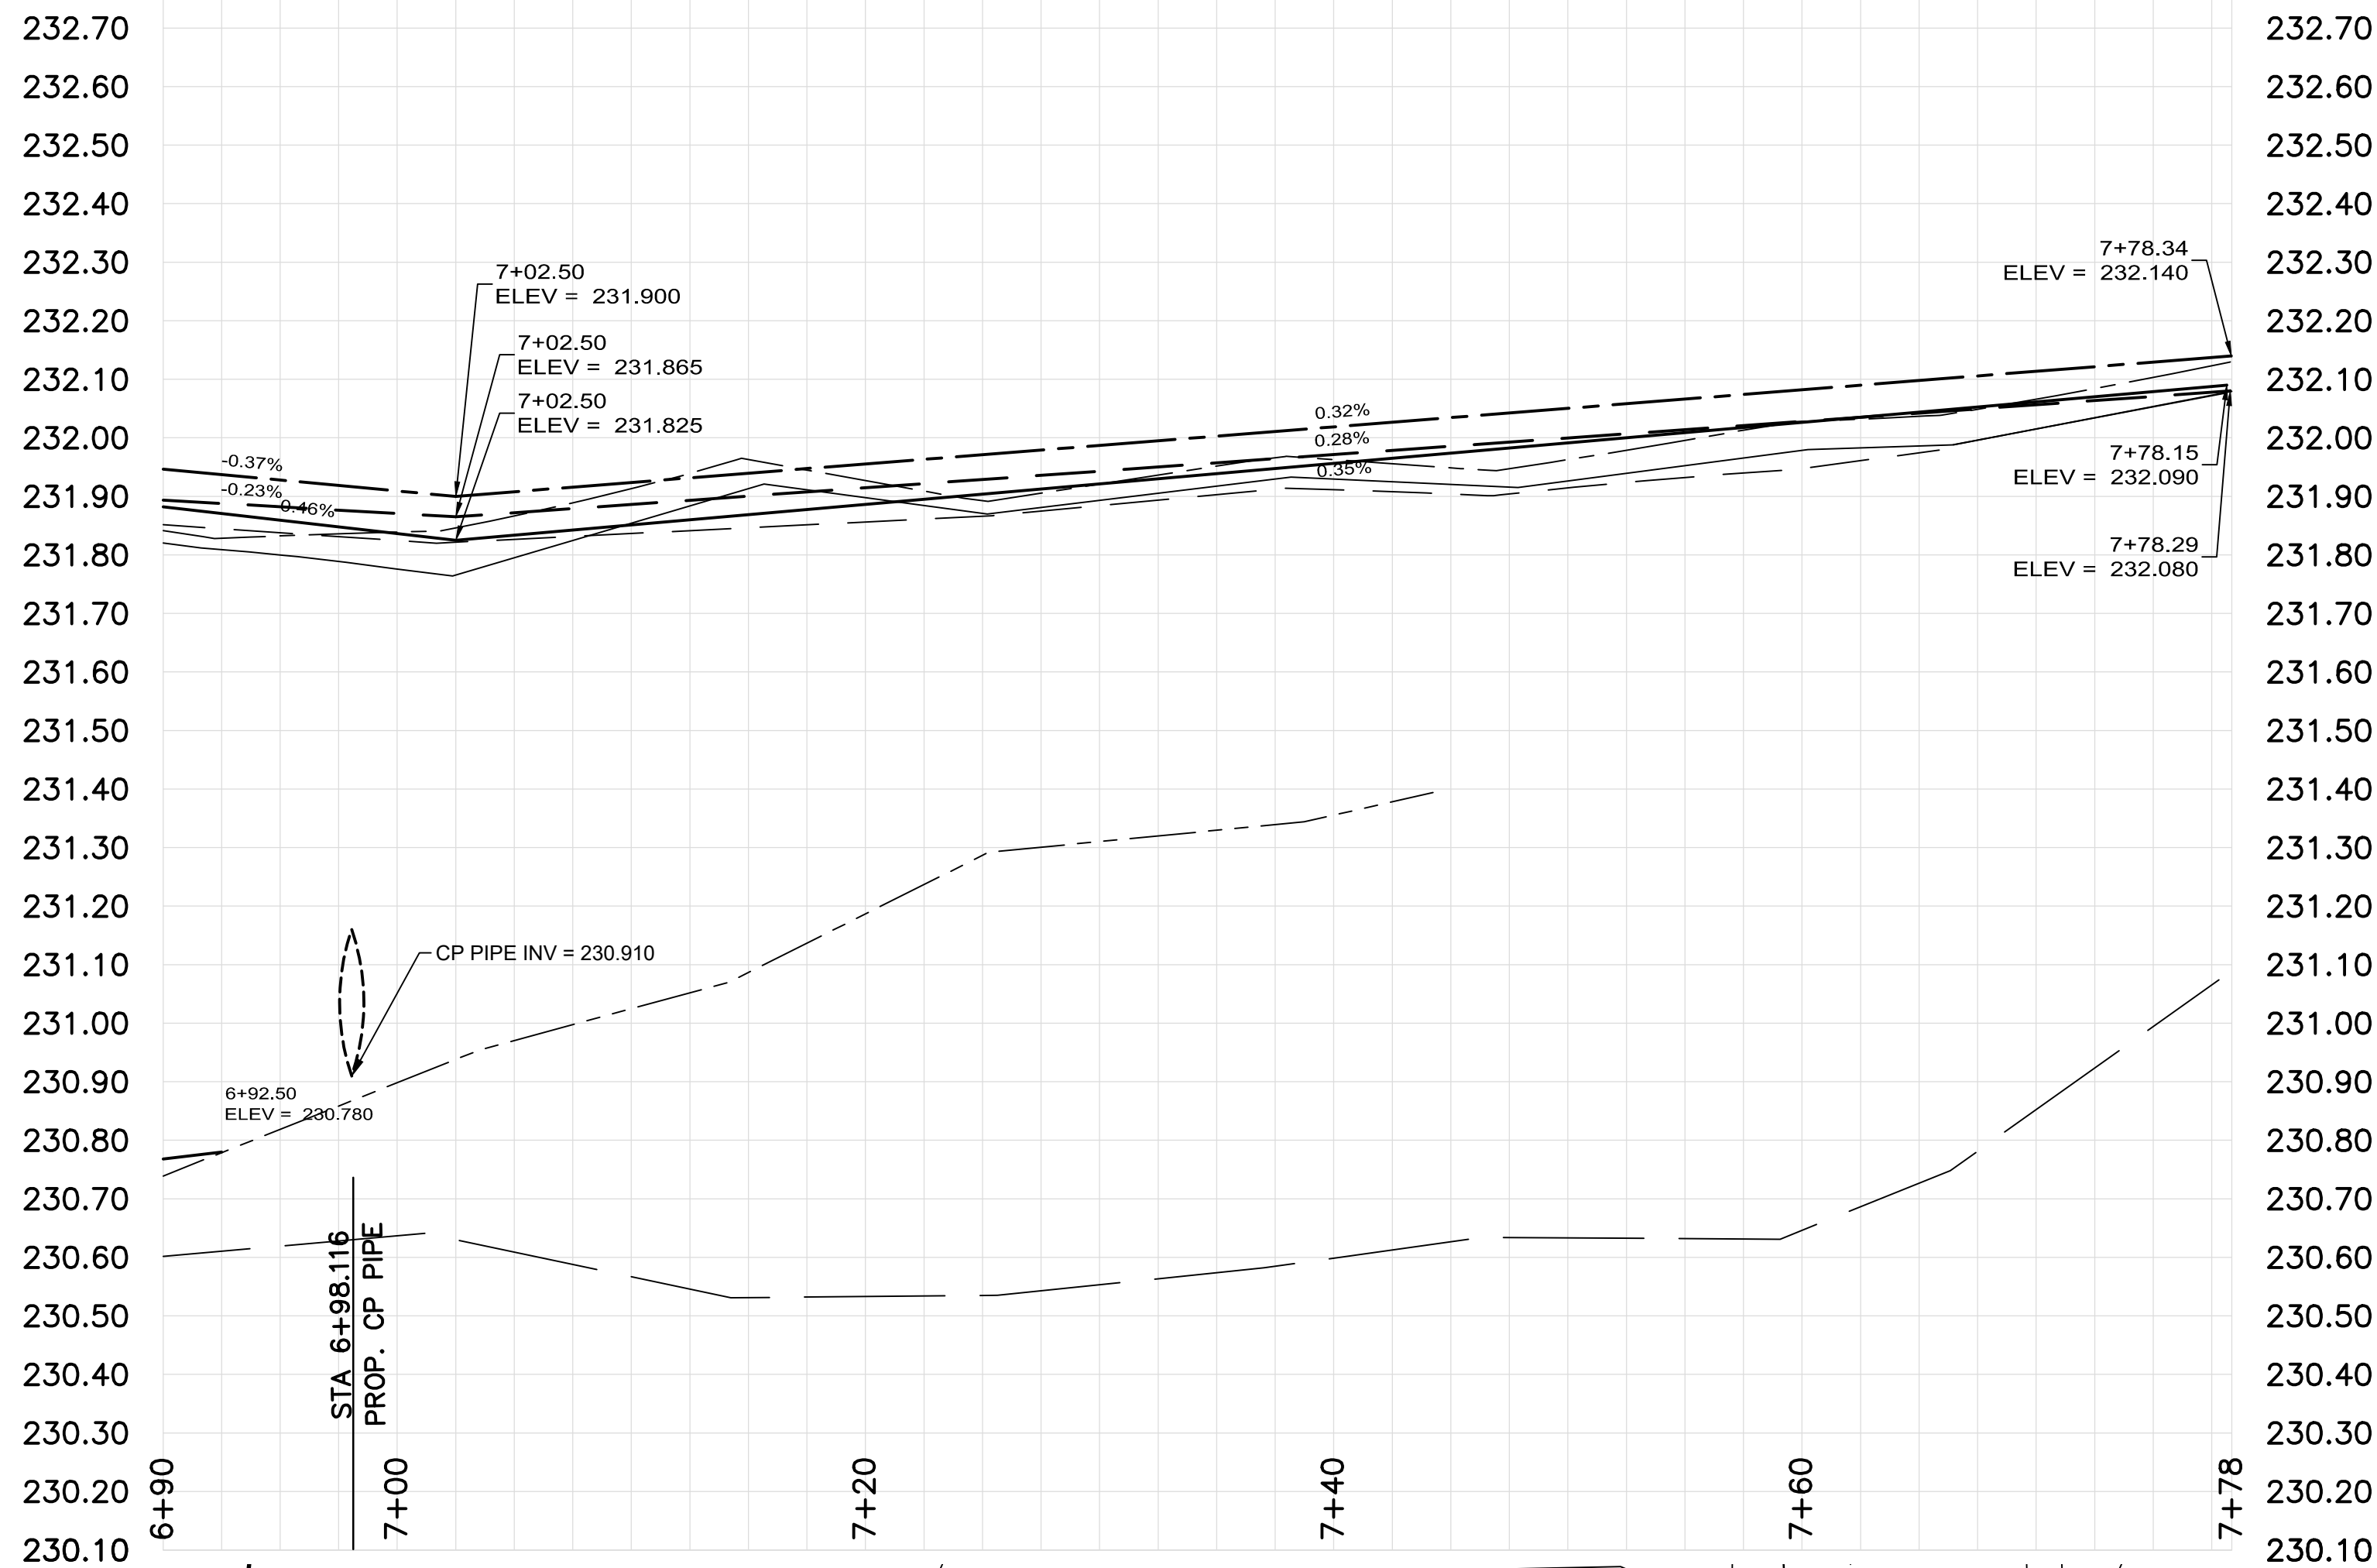


- CONSTRUCTION NOTES**
- MILL 1-50mm OF EXISTING ASPHALT. CONSTRUCT SHOULDER WIDENING AND OVERLAY WITH 80mm (TYP.) MS1 ASPHALT PAVEMENT AS PER CROSS SECTION A (E14)
 - REMOVE EXISTING PAVEMENT AND CONSTRUCT NEW 125mm ASPHALT PAVEMENT AS PER CROSS SECTION B (E14)
 - MILL 1-50mm OF EXISTING ASPHALT AND OVERLAY WITH 80mm ASPHALT PAVEMENT AS PER CROSS SECTION C (E14)
 - RE-GRADE EXISTING GRANULAR APPROACH AS DIRECTED BY CONTRACT ADMINISTRATOR
 - MILL 50mm OF EXISTING ASPHALT
 - CONSTRUCT NEW CONCRETE BARRIER CURB FOR ASPHALT PAVEMENT WITH 125mm CURB REVEAL (SD-200A, E13)
 - CONSTRUCT NEW CURB RAMP (SD-229D)
 - INSTALL NEW CATCH PIT WITH CURB & GUTTER INLET FRAME (SD-023, E17), AND DRAIN TO DITCH WITH 250mm Ø CORRUGATED STEEL PIPE AS PER CW 2130
 - CONSTRUCT 150mm CONCRETE ISOLATION (SD-220D)
 - CONSTRUCT NEW ASPHALT PATHWAY AS PER CROSS SECTION C (E14)
 - SUPPLY AND INSTALL TYPE "A" PAVEMENT REPAIR FABRIC
 - RENEW EXISTING MODIFIED BARRIER CURB (SD-205)
 - REMOVE CONCRETE CURB AND GUTTER
 - INSTALL LIFTER RING TO GRADE
 - INSTALL NEW CULVERT AS PER CW 3610
 - RE-GRADE EXISTING DITCH
 - CONSTRUCT GROUTED STONE RIPRAP AS PER CW 3615
 - CONSTRUCT NEW 100mm CONCRETE SIDEWALK (SD-228A, E19)
 - REMOVE EXISTING ASPHALT PAVEMENT
 - REMOVE AND DISPOSE EXISTING CULVERT
 - REMOVE EXISTING APPROACH AND CONSTRUCT DITCH
 - REMOVE EXISTING CONCRETE SIDEWALK
 - CONSTRUCT NEW 100mm CONCRETE SIDEWALK (SD-228B, E19), NEW CURB RAMP (SD-229D), AND INSTALL DETECTABLE SURFACE WARNING TILES (SD-229E)
 - CONSTRUCT NEW HYDRANT BOULEVARD ACCESS, CAP WITH TOP SOIL AND SOD
 - CONSTRUCT NEW MONOLITHIC CURB AND SIDEWALK (SD-228B, E19)

- GENERAL NOTES**
- PAVEMENT DIMENSIONS ARE TO BACK OF CURB
 - ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED
 - CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
 - ALL WATER SERVICES WITHIN THE LIMITS OF THE RECONSTRUCTION SHALL BE INSULATED AS PER SD-018
 - CONTRACTOR TO CONFIRM LOCATION OF ALL UTILITIES/SERVICES PRIOR TO CONSTRUCTION
 - ADJUST ALL CURB STOPS AND WATER VALVES TO GRADE

ISSUED FOR TENDER
NOT TO BE USED FOR
CONSTRUCTION

METRIC
WHOLE NUMBERS INDICATE MILLIMETERS
DECIMALIZED NUMBERS INDICATE METERS

TENDER NO. 27-2025

HYDRANT	BOULEVARD	CONCRETE
VALVE	EDGE OF GRAVEL/SHOULDER	CONCRETE SIDEWALK
CURB STOP	LDS/WWS	ASPHALT RECONSTRUCTION
MANHOLE	WATERMAIN	ASPHALT REHABILITATION
CATCH BASIN	GAS	REPAIR FABRIC
CATCH PIT/CURB INLET	TRAFFIC SIGNALS	RIP RAP
HYDRO POLE	HYDRO/STREET LIGHT	TOP OF DITCH
LIGHT STANDARD	MTS/SHAW	CENTER LINE
TRAFFIC SIGNAL POLE	CURB RENEWAL	WEST EDGE OF ASPHALT
SURVEY BAR	PROPERTY LINE	EAST EDGE OF ASPHALT
TREE	RAMP CURB	WEST CL DITCH
ELEVATIONS	CL DITCH	EAST CL DITCH
EXISTING	LEGEND - PLAN	LEGEND - PROFILE

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPR. LIG STRUCTURES
COMMITTEE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 1X1 IB @ NW CORNER OF BONNER/DE VRIES
ELEV. 231.593

2.	ISSUED FOR TENDER	05/03/2025	DPEN
1.	SUBMIT FOR PLAN APPROVAL	04/02/2025	DPEN
NO.	REVISIONS	DATE	BY

ENGINEERING DIVISION
TECHNOLOGY SERVICES BRANCH
106 - 1155 PACIFIC AVE

DESIGNED BY	D.PEN	CHECKED BY	T.G. E.H. R.W. J.S.
DRAWN BY	D.PEN	APPROVED BY	J.T.S.
HOR. SCALE:	1 : 250		
VERTICAL:	1 : 10		
DATE	2025/02/28		



THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

DE VRIES AVENUE
FROM MCIVOR AVENUE TO HEADMASTER ROW
ASPHALT REHABILITATION AND ASSOCIATED WORKS
FROM STA. 6+90 TO STA. 7+78

CITY DRAWING NUMBER
SE-25-311

SHEET 12 OF 23

6