


CONSTRUCTION NOTES:

- 1. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH LATEST REVISION OF THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS.
- 2. LEGAL PLAN AND UNDERGROUND INFORMATION FROM CITY OF WINNIPEG LBIS. CONTRACTOR TO VERIFY ALL UNDERGROUNDS IN THE FIELD.
- 3. CONTRACTOR TO TAKE PRECAUTIONARY STEPS TO AVOID DAMAGE FROM CONSTRUCTION ACTIVITIES TO TREES WITHIN THE LIMITS OF CONSTRUCTION AS OUTLINED IN THE SPECIFICATIONS.
- 4. LOCATION OF EXISTING SERVICES TO BE CONFIRMED IN THE FIELD BY THE CONTRACTOR.
- 5. ALL DIMENSIONS ARE TO BACK OF CURB.
- 6. LIMITS OF CURB AND SIDEWALK RECONSTRUCTION TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
- 7. ADJUST ALL WATER VALVES, MANHOLES, CATCH BASINS, CATCH PITS AND WATER SHUT OFF VALVES TO GRADE.

- 8. ALL PRIVATE WALKWAYS TO BE ADJUSTED TO NEW SIDEWALK OR TOP OF CURB ELEVATION, AS REQUIRED.
- 9. STREET LIGHT STANDARDS, HYDRO POLES AND ANCHORS THAT REQUIRE TEMPORARY SUPPORT, REMOVAL OR REPLACEMENT, ARE TO BE DONE AT THE

EXPENSE OF THE CONTRACTOR, AS NECESSARY.

- 10. FOR ROAD RECONSTRUCTIONS, ALL WATER MAIN SERVICES NEED TO BE INSULATED UNLESS NOTED OTHERWISE. ADDITIONALLY, ALL CATCH BASINS, MANHOLES AND LEAD PIPES LOCATED WITHIN 2.0 m OF A RESIDENTIAL SERVICE MUST BE INSULATED TO PROTECT THE SERVICE FROM POTENTIAL FUTURE FREEZING.
- 11. CONSTRUCT MODIFIED BARRIER CURB (SD-203B) AT ALL INTERSECTION RADII AND ALLEY RADII.
- 12. CONTRACTOR TO OVERLAY DRIVEWAYS TO ENSURE POSITIVE DRAINAGE TO NEW STREET GRADES. FINAL LIMITS TO BE DETERMINED IN THE FIELD BY CONTRACT ADMINISTRATOR.
- 13. REFER TO TENDER FOR DETAILS REGARDING TRAFFIC MANAGEMENT.

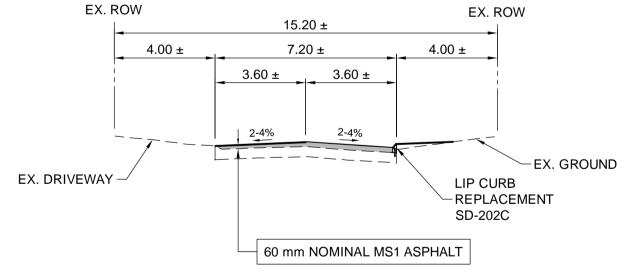

TYPICAL WESTMOUNT SECTION

SCALE: H=1:150, V=1:75

ENGINEERS GEOSCIENTISTS **MANITOBA** Certificate of Authorization Dillon Consulting Limited (MB)

No. 1789 Date: 2025/03/25

p ∕t	- \$-	HYDRANT		150 <u>WM</u>	WATERMAIN	150 _. <u>WM</u>		CONCRETE ROAD	
202	\otimes	VALVE	8	300 LDS	LAND DRAINAGE SEWER	300 LDS		ASPHALT ROAD	
S:		CURB STOP	<i>></i>	250 WWS	WASTE WATER SEWER	250 WWS		CONC ROAD W/ASP OVERLAY	
king directory\project	•	LIGHT STANDARD	•••	HYDRO	HYDRO	HYDRO		CONCRETE SIDEWALK	
	● H	HYDRO POLE	● H	BELLMTS	BELLMTS	BELLMTS		ASPHALT PATH	
		TREE		100 GAS	GAS	100 GAS		PAVEMENT REPAIR FABRIC	
		GEODETIC BENCH MARK		T.S.	TRAFFIC SIGNALS	T.S		GRASS/SOD	+ + +
	+	SURVEY BAR		S.L	STREET LIGHTS	S.L	232.000	ELEVATION	232.000
	\circ	MANHOLE	•	•	TRAFFIC SIGNAL POLE	•		PROPERTY LINE	
wor		CATCH BASIN			PAVING STONE			CURB RAMP	
×	∇	CATCH PIT	▼		CURB RENEWAL			DETECTABLE TILE	<u> </u>
Z;	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED

WHOLE NUMBERS INDICATE MILLIMETRES

DECIMALIZED NUMBERS INDICATE METRES

UNDERGROUND STRUCTURES			B.M. ELEV.			BY	TJH	'\.	El
						DRAWN BY	TJH	, or the state of	
	SUPV. U/G STRUCTURES DATE					CHECKED BY	LAS	DILLON	
	LOCATION OF UNDERGROUND STRUCTURES AS					APPROVED BY	TJP	CONSULTING	1
	SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT					HOR. SCALE	1:250	RELEASED FOR CONSTRUCTION	<u></u>
	LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES	0	ISSUED FOR TENDER	25/03/25	LAS	VERTICAL	1:10		
	BEFORE PROCEEDING WITH CONSTRUCTION.	NO.	REVISIONS	DATE	BY	DATE		DATE	

L.A. STOFFEL Member 40132
CONSULTANT PROJECT NUMBER

24-9227

	NEER'S SEAL
TX7 :	SHOULDE OF MANIFOLD
Wi	STOFFEL
20	Member 40132

Winnipeg	
2025 RESIDENTIAL STREETS RE	NEW

2025 RESIDENTIAL STREETS RENEWAL PROGRAM
CROMWELL STREET AND VARIOUS OTHER LOCATIONS
SKOWWELL STREET AND VARIOUS OTTER LOCATIONS

1+230 TO 1+345)

	CITY DRAWING NUMBER		
SIDENTIAL STREETS RENEWAL PROGRAM			
STREET AND VARIOUS OTHER LOCATIONS	SHEET	OF	
	26	33	
WESTMOUNT BAY (STA.	CONSULTANT	DRAWING NUMBER	

THE CITY OF WINNIPEG

PUBLIC WORKS DEPARTMENT