


CLIENT



COPYRIGHT NOTICE
THIS DRAWING AND DESIGN IS COPYRIGHT PROTECTED.
DO NOT REPRODUCE OR REVISE WITHOUT WRITTEN
PERMISSION BY ARCHITECTURE49 INC.

SEAL:

THIS BAR IS 25mm LONG WHEN PLOTTED AT
CORRECT SCALE. DO NOT SCALE DRAWINGS.

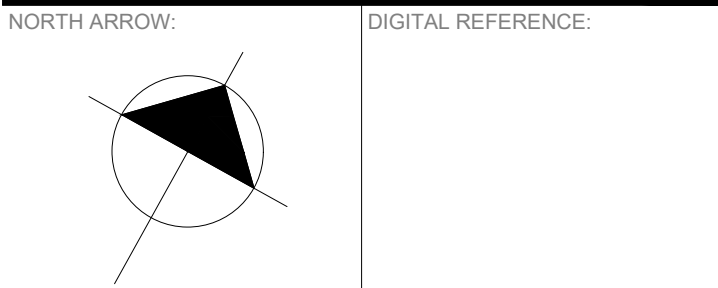

PROJECT NO.: CA0051966.1097 CONTRACT NO.
DRAWN BY: SM CHECKED BY: BB APPROVED BY: --
KEYPLAN:

1 2025/09/05 ISSUED FOR ADDENDUM #1
0 2025/08/18 ISSUED FOR TENDER
NO. DATE ISSUED


SWCC RICHMOND SPRAY
PAD

DRAWING TITLE

PLANTING PLAN

DRAWING NO. L201

PRINT DATE: 2025-09-05

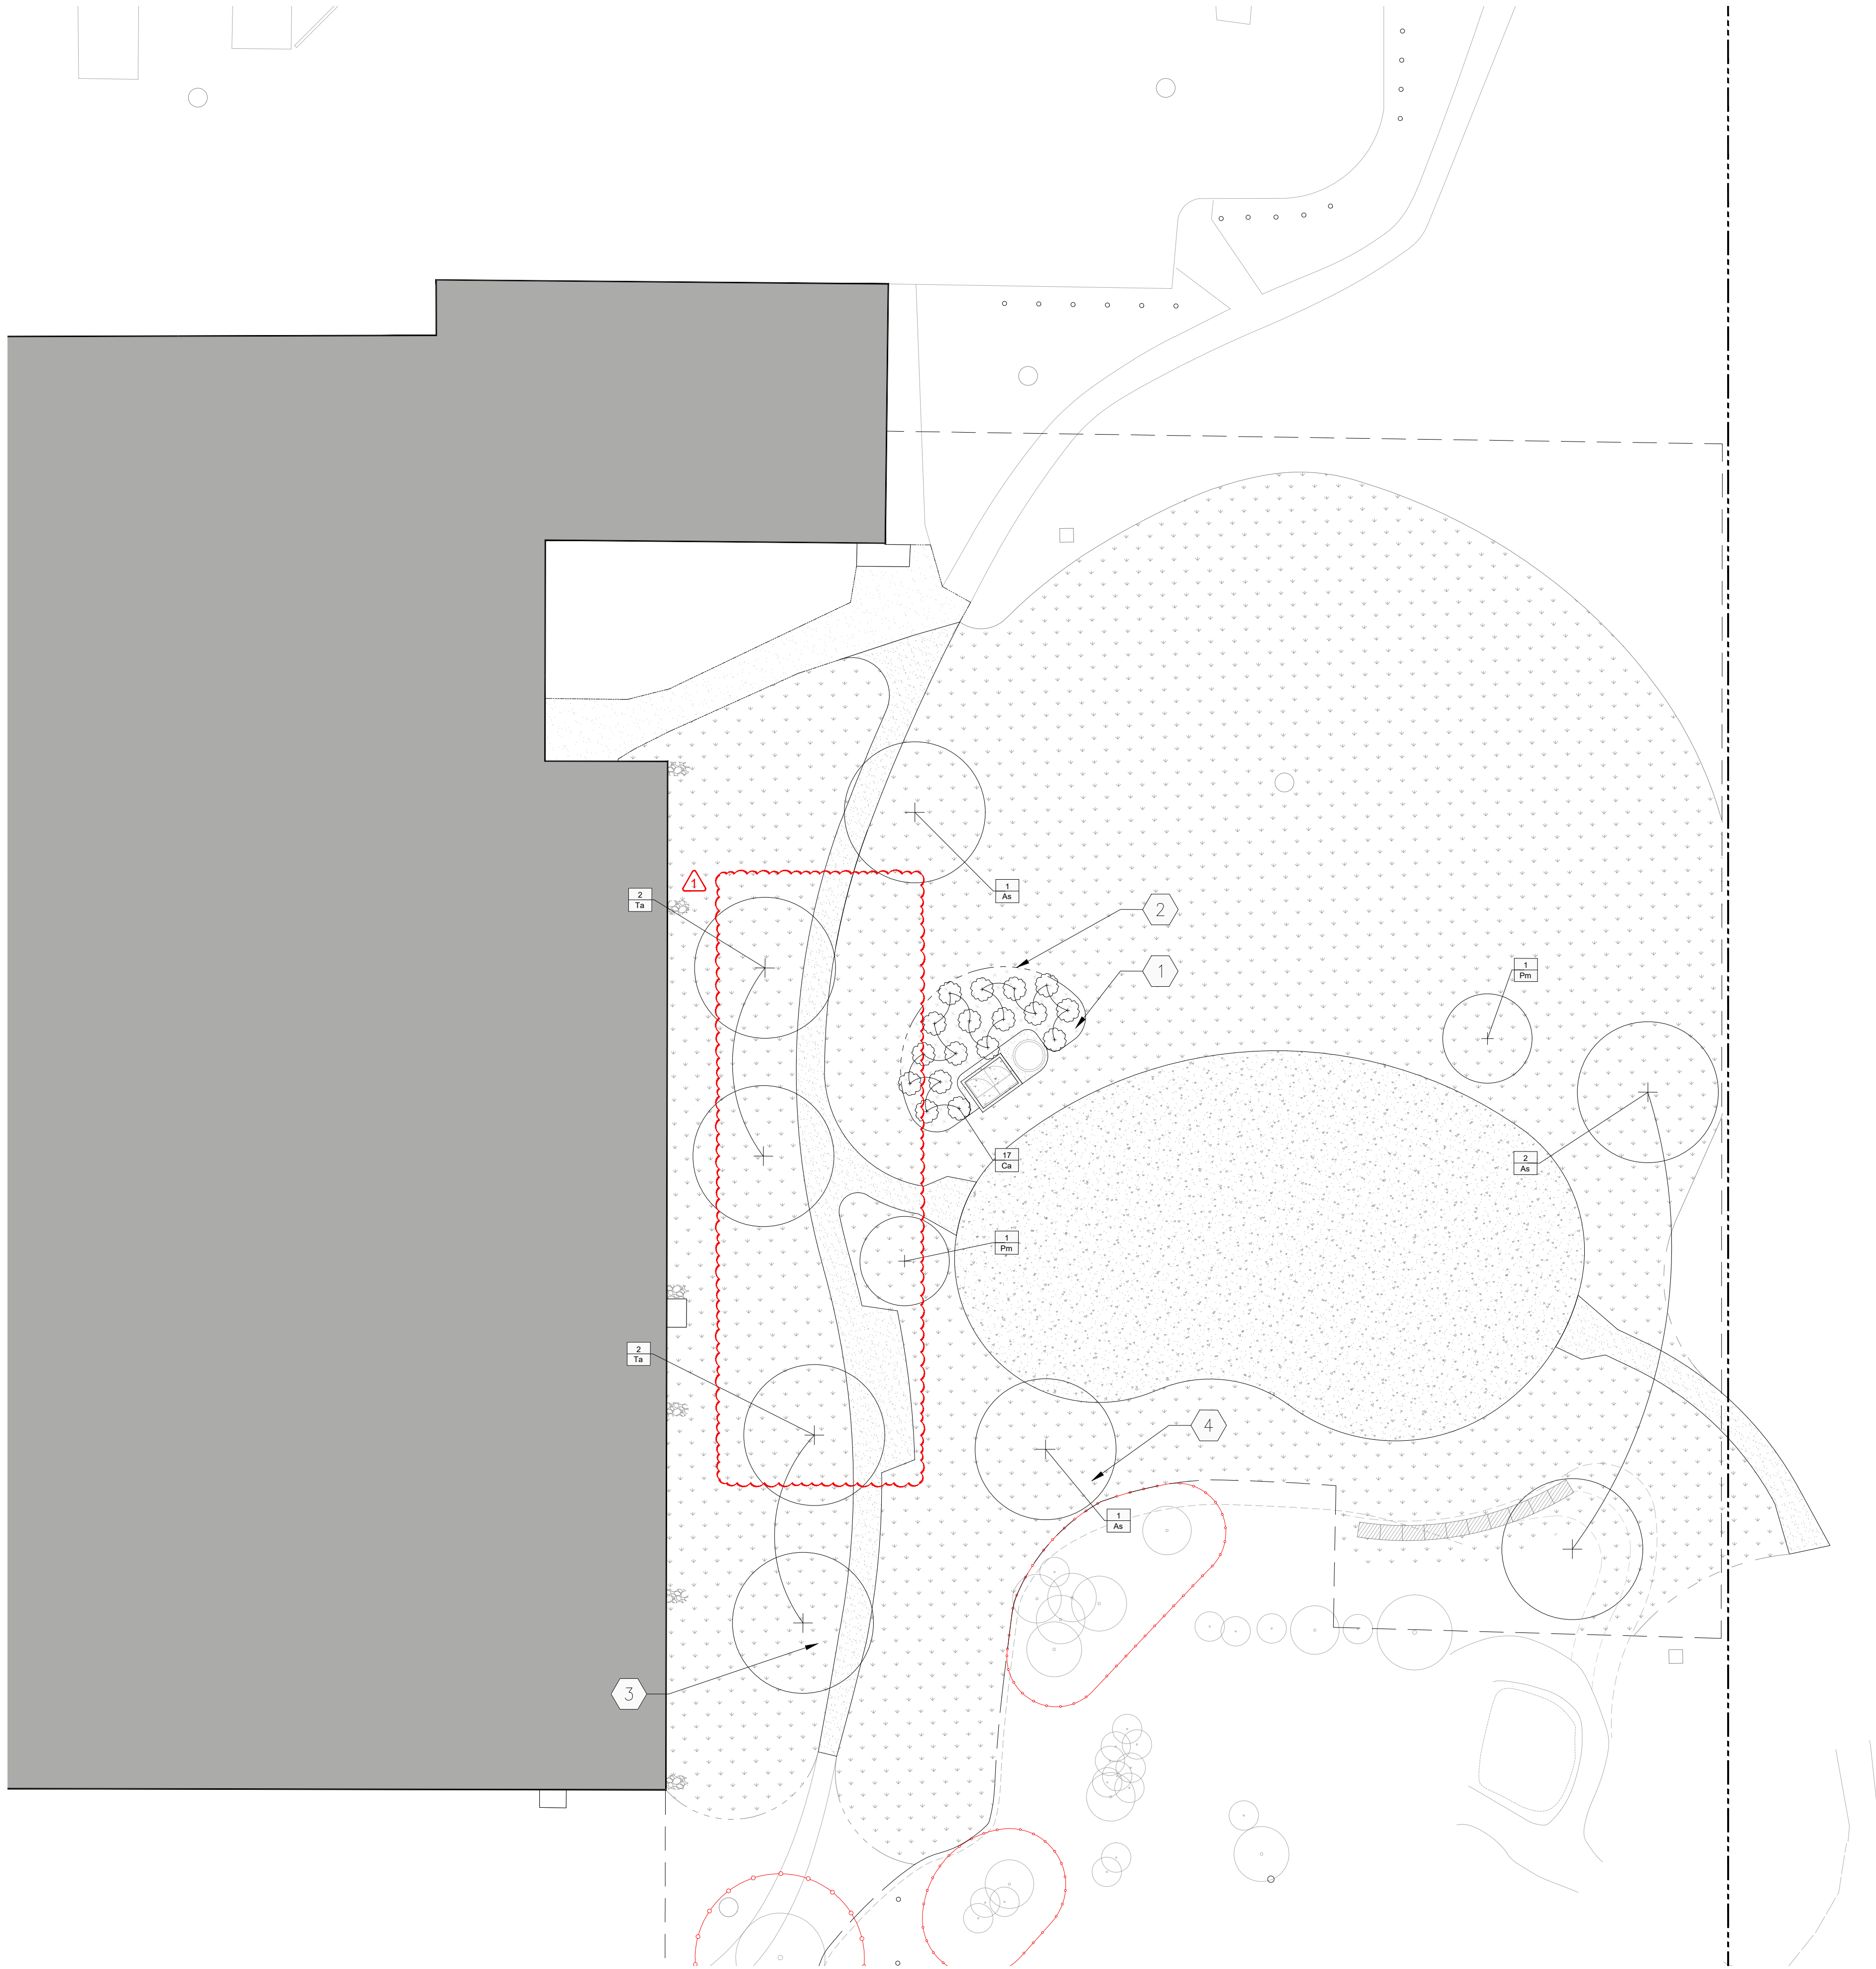

LEGEND:

- PROPERTY LINE
- LIMIT OF WORK
- EXISTING BUILDING(S)
- EXISTING TREE TO REMAIN
- THICKENED EDGE CONCRETE PAD
- GRANULAR PATH
- PLANTING BED
- SOD
- TREE PROTECTION FENCING (REFER TO SPECIFICATIONS)
- PROPOSED SHRUB
- PROPOSED DECIDUOUS TREE
- PLANT KEY:
QUANTITY
SPECIES CODE

KEYNOTES:

- SHRUBS TO BE MIN. 600mm INSET FROM EDGE OF PLANTING BED
- PLANTING BED EXTENTS TO BE DETERMINED IN FIELD
- TREES TO BE SITED MIN. 2000mm FROM CL OF SWALES
- TREES TO BE SITED MIN. 1000MM FROM TOE OF BERM

PLANTING NOTES:

- LOCATION OF ALL PLANT MATERIAL TO BE MARKED OUT ON SITE AND APPROVED BY CONTRACT ADMINISTRATOR PRIOR TO PLANTING.
- TREE SPACING, UNLESS OTHERWISE NOTED:
 - DECIDUOUS TREES: 6.0m MIN.
 - MAINTAIN MIN. 2000mm OFFSET FROM ALL HARD SURFACING
- ALL PLANT MATERIAL TO BE BEST QUALITY PER CANADIAN LANDSCAPE STANDARDS (2ND EDITION), REVIEWED ON SITE BY LANDSCAPE ARCHITECT PRIOR TO PLANTING. UNACCEPTABLE PLANTS TO BE REPLACED AND NEW PLANTS APPROVED PRIOR TO PLANTING. REPLACEMENTS ARE AT CONTRACTOR'S OWN COST.
- ALL PLANTING EXCAVATIONS ARE TO BE REVIEWED AND APPROVED BY LANDSCAPE ARCHITECT PRIOR TO PLACEMENT OF DRAINAGE COURSE, FILTER FABRIC AND/OR SOIL.
1. TREES TO BE INSTALLED AND APPROVED PRIOR TO SODDING
- PLANTING BED AROUND VALVE CABINET/WATER METER PAD TO BE OFFSET MIN. 300mm. MAINTAIN GRANULAR MAINTENANCE STRIP. SIZE OF PLANTING BED TO BE DETERMINED BY PROPONENT'S DESIGN OF CABINET, MIN. 2800mm DEPTH ON ALL SIDES AS SHOWN.
- CONTRACTOR TO CONFIRM ON SITE THAT SLOPES OF PLANTED AREAS DO NOT EXCEED 30%. COORDINATE WITH LANDSCAPE ARCHITECT IF SLOPES EXCEED 30% PRIOR TO INSTALLING ANY PLANT MATERIAL.
- LANDSCAPE ARCHITECT IN ALL REFERENCES REFERS TO PROJECT LANDSCAPE ARCHITECT (ARCHITECTURE 49)

CODE	QTY.	BOTANICAL NAME	COMMON NAME	SPACING (mm)	SIZE	NOTES
TREES						
Ta	4	<i>Tilia americana</i> 'McKsentry'	American Sentry Linden	AS SHOWN	50mm cal. B&B	TREES TO BE BALL & BURLAP. SOURCED IN GROWING ZONE 4 OR HIGHER. ALL TREES SHOULD HAVE 5 TO 7 MAIN BRANCHES WITH DOMINANT LEADER BRANCH AND WITHOUT DEFECT.
As	4	<i>Acer saccharinum</i> 'Silver Cloud'	Silver Cloud Maple	AS SHOWN	50mm cal. B&B	
Pm	2	<i>Prunus maackii</i> 'Ming'	Ming Cherry	AS SHOWN	25mm cal. B&B	
SHRUBS						
Ca	17	<i>Cornus alba</i> 'Bud's Yellow'	Bud's Yellow Dogwood	1750	5 gal.	SHRUBS TO BE IN POTS. SOURCED IN GROWING ZONE 4 OR HIGHER. ALL SHRUBS SHOULD HAVE DENSE GROWTH, WELL-FORMED ROOTS AND WITHOUT DEFECT.

0 1 5 10 20 METRES

BID OPP. NO. 663-2025

1 PLANTING PLAN
L201 1:200