
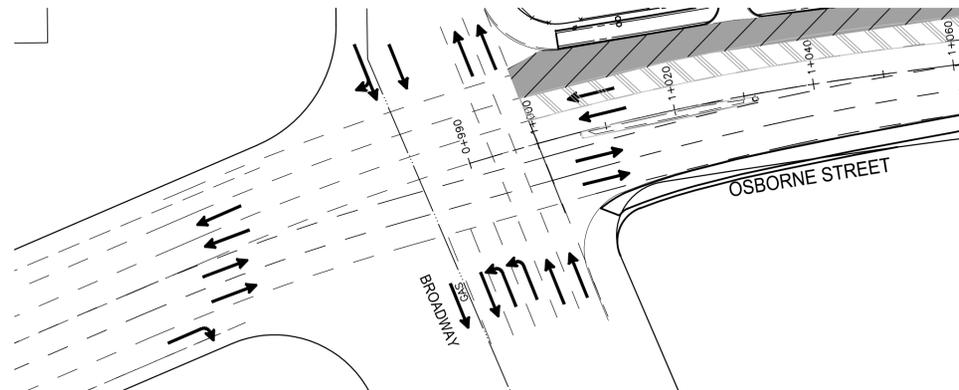


STAGE 1 - CONSTRUCTION

- WEST SIDEWALK RENEWAL

NOTES:

1. MAINTAIN TWO SOUTHBOUND LANES OF TRAFFIC DURING PM PEAK HOURS (3:30 - 5:30)
2. MAINTAIN TWO LANES OF TRAFFIC ON YORK AVE & ST MARY AVE AT ALL TIMES
3. MAINTAIN PEDESTRIAN CORRIDOR IN CLOSED SOUTHBOUND GUTTER LANE AND PROVIDE PEDESTRIAN ACCESS TO BUILDINGS AT ALL TIMES
4. COORDINATE WITH HYDRO WORKS AND STREET LIGHT RELOCATIONS


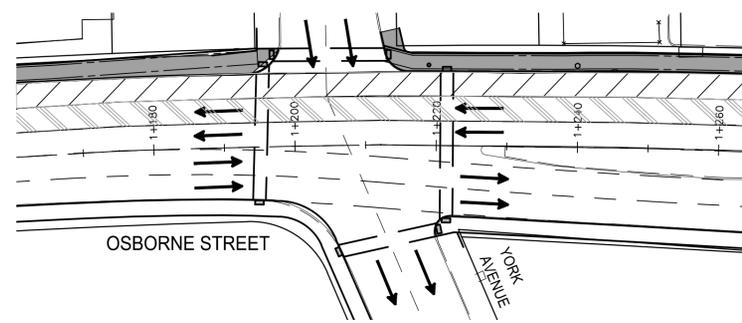


STAGE 2 - CONSTRUCTION

- SOUTHBOUND GUTTER LANE
 - PLANING
 - CONCRETE PAVEMENT RENEWAL
 - CURB RENEWAL
 - ASPHALT OVERLAY BOTTOM LIFT

NOTES:

1. MAINTAIN TWO SOUTHBOUND LANES OF TRAFFIC DURING PM PEAK HOURS (3:30 - 5:30)
2. MAINTAIN TWO LANES OF TRAFFIC ON YORK AVE AT ALL TIMES

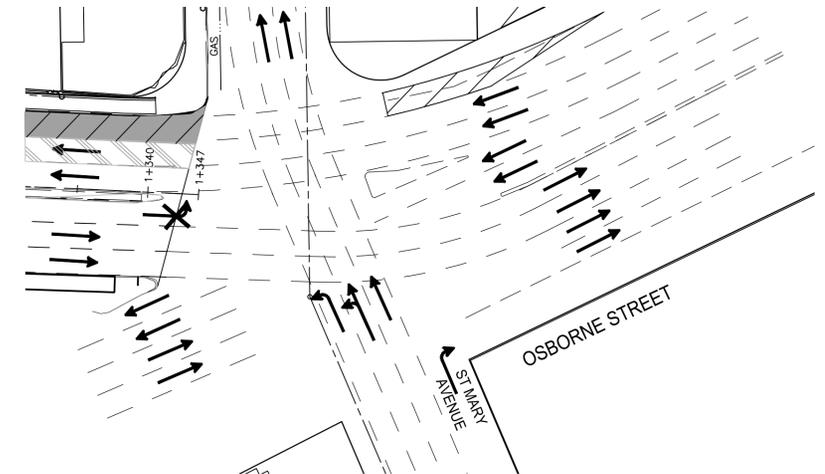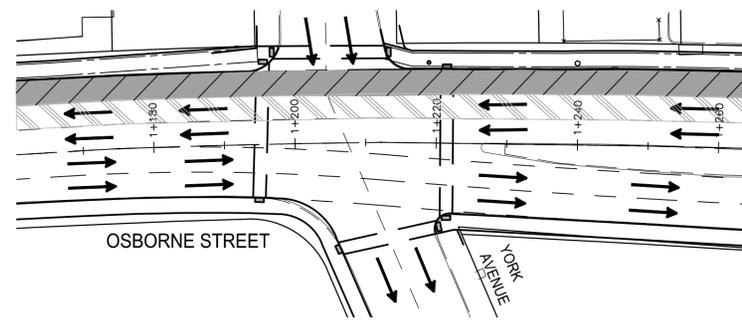

GENERAL NOTES FOR ALL STAGES:

1. CONTRACTOR IS RESPONSIBLE FOR ALL CONSTRUCTION SIGNING AND BARRICADES WITHIN AREA UNDER CONSTRUCTION EXCLUDING AREAS IN NOTE 1.
2. THE CITY OF WINNIPEG IS RESPONSIBLE FOR TRAFFIC CONTROL AND REQUIRED SIGNAGE ON OSBORNE ST. SOUTH OF BROADWAY AND NORTH OF ST. MARY, YORK AVE. WEST AND EAST OF OSBORNE ST. AND ST. MARY AVE., WEST AND EAST OF OSBORNE ST. INCLUDING SWITCHING OF REVERSIBLE LANES SIGNAGE / DELINEATION OF OSBORNE ST. DURING A.M. AND P.M. PEAK HOURS.
3. MAINTAIN PEDESTRIAN ACCESS ON WEST SIDE OSBORNE ST. BROADWAY AVE., ONE SIDE OF YORK AVE AND ST. MARY AVE. AT ALL TIMES.
4. MAINTAIN ACCESS TO BUS STOPS AS REQUIRED BY TRANSIT.

APEGM
 Certificate of Authorization
 Stantec Consulting Ltd.
 No. 1301

LEGEND

- POLYPOSTS
- LANE CLOSURE
- CONSTRUCTION ZONE
- PEDESTRIAN CORRIDOR
- OFF PEAK CLOSURE

METRIC
 WHOLE NUMBERS INDICATE MILLIMETRES
 DECIMALIZED NUMBERS INDICATE METRES

LOCATION APPROVED UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE	DATE

NOTE:
 LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

NO.	REVISIONS	DATE	BY
1	RE-ISSUED FOR TENDER	15.06.15	
0	ISSUED FOR TENDER	15.05.29	

Stantec
 100 - 1355 Taylor Avenue, Winnipeg MB Canada
 www.stantec.com

DESIGNED BY: D.L.	CHECKED BY: W.K.B.
DRAWN BY: G.P.	APPROVED BY: W.K.B.
HOR. SCALE: 1:250	RELEASED FOR CONSTRUCTION: DATE
VERTICAL: 1:10	DATE: 2015.04.14

ENGINEER'S SEAL
PRELIMINARY DRAWING
 NOT TO BE USED FOR CONSTRUCTION
 CONSULTANT DRAWING NO. C109

THE CITY OF WINNIPEG
 PUBLIC WORKS DEPARTMENT
 ENGINEERING DIVISION

BID OPPORTUNITY No. 275-2015
 OSBORNE ST REHABILITATION
 BROADWAY TO ST MARY AVE
 STAGING / TRAFFIC CONTROL

SHEET 10 OF 16
CAD FILE DRAWING NUMBER 06660c-109-774.dwg
CITY DRAWING NUMBER P-3468-1