POINT DOUGLAS AVENUE

MCFARLANE ST

SYNDICATE ST

59.2 OF 900 BRICK CS TO BE LINED
S-MA00014005 (PARTIALLY DETERIORATED)

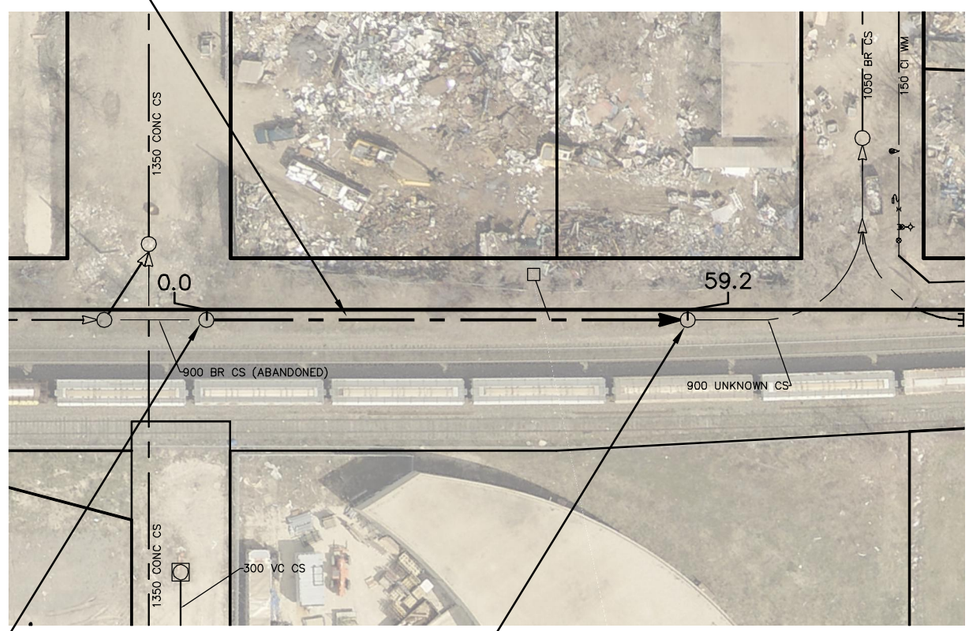

S-MH00012498
RIM 231.92
INV E 225.84

S-MH00014072
RIM 232.01
INV W 225.76
INV E 225.76

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION SEWER ID S-MA00014005		
DISTANCE FROM MH ID S-MH00012498		
DISTANCE	DIAMETER	CLOCK
9.0	150	9
9.0	150	3
57.8	150	9

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

FOR INDEX SEE 11020

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES
0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

CONSTRUCTION COMPLETION DATE: YYYY MM DD

NO.	REVISIONS	DATE	BY

DESIGNED BY	NC	CHECKED BY	SC
DRAWN BY	RJ	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	KAS ZUREK
VERTICAL			
DATE	2016 01 29	DATE	

PLOT DATE: 2016 01 29

ENGINEER'S SEAL
ORIGINAL SIGNED BY N.M. CONTI 16/01/28

CONSULTANT DRAWING NUMBER
–

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2015 SEWER RENEWALS
BY CIPP LINING
POINT DOUGLAS AVENUE
MH AT MCFARLANE STREET (E PL) TO
1ST MH W OF SYNDICATE STREET

SHEET 36 OF 56

CITY DRAWING NUMBER
11052

BID OPPORTUNITY: 960-2015
CONTRACT NUMBER: 1

FILE PATH: R:\DRAWINGS\SEWER\2015 RENEWALS\RENEWALS & ASSOSTIATED WORKS\Contract 1\Construction Dwg\
FILE NAME: POINT_DOUGLAS_S-MA00014005.dwg