



**STAGE 1 - CONSTRUCT EASTBOUND LANES**  
SCALE 1:750

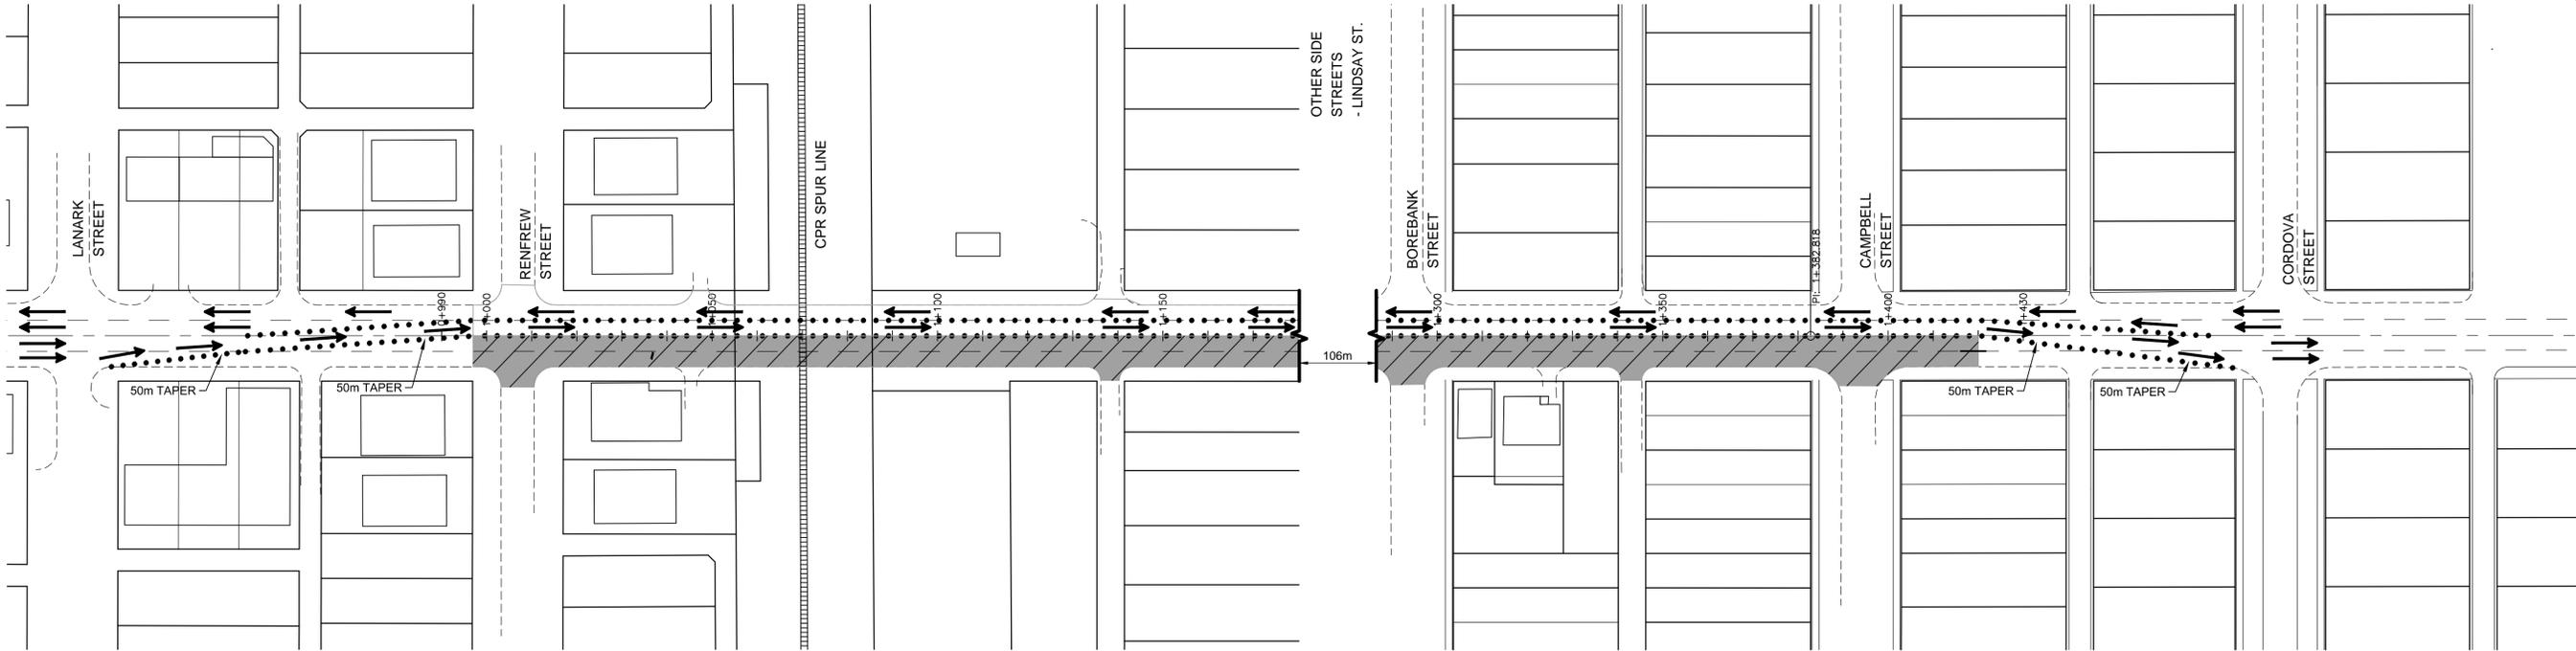

**STAGE 2 - CONSTRUCT WESTBOUND LANES**  
SCALE 1:750

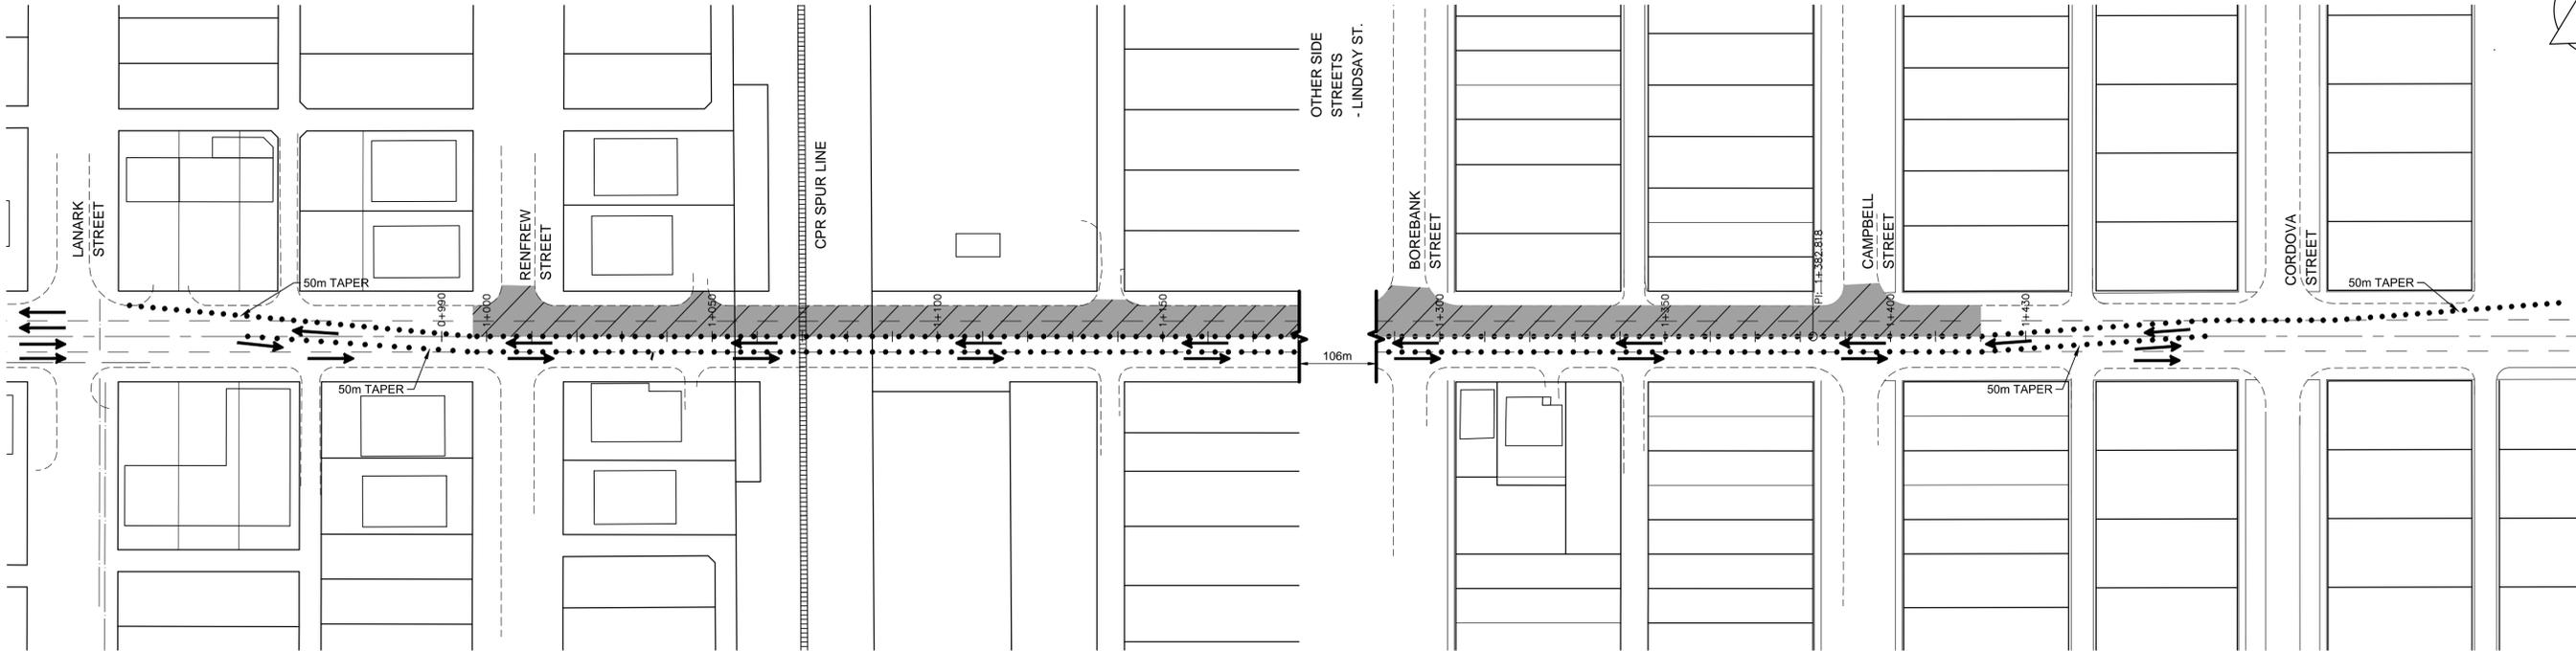

**MAIN CONSTRUCTION ACTIVITIES:**

- PAVEMENT MILL AND FILL CONSTRUCTION ON EASTBOUND AND WESTBOUND LANES OF ACADEMY BETWEEN RENFREW STREET AND CAMPBELL STREET.

**TRAFFIC CONTROL NOTES:**

- LANE CLOSURES & RESTRICTIONS**
  - STAGE 1, CLOSE EB LANES FOR CONSTRUCTION, MAINTAIN ONE LANE IN EACH DIRECTION ON WB LANES.
  - STAGE 2, CLOSE WB LANES FOR CONSTRUCTION, MAINTAIN ONE LANE IN EACH DIRECTION ON EB LANES.
  - LEFT TURNS RESTRICTED FOR DURATION OF TRAFFIC CONTROL STAGING.
  - TRAFFIC PLAN TO BE SUBMITTED FOR APPROVAL PRIOR TO SET UP OF TRAFFIC CONTROL.
- PEDESTRIAN TRAFFIC**
  - MAINTAIN SIDEWALKS DURING CONSTRUCTION.
  - MAINTAIN NORTH AND SOUTH CROSSINGS AND ONE EAST OR WEST CROSSING ON ALL STREETS FOR DURATION OF PROJECT.
  - REQUIRED CLOSURES FOR SIDEWALK CONSTRUCTION TO BE COORDINATED AND APPROVED BY CONTRACT ADMINISTRATOR.
- TRANSIT**
  - MAINTAIN TRANSIT STOPS AS OUTLINED IN THE SPECIFICATIONS.
- PARKING / LOADING**
  - PARKING / LOADING RESTRICTIONS TO BE IN PLACE FOR DURATION OF CONSTRUCTION.
  - RESTRICTION SIGNAGE TO BE COMPLETED BY TRAFFIC SERVICES.

**GENERAL NOTES:**

- TRAFFIC CONTROL PROVIDED AND MAINTAINED BY CONTRACTOR IN ACCORDANCE WITH CITY OF WINNIPEG MANUAL OF TEMPORARY TRAFFIC CONTROL ON CITY STREETS AND TRAFFIC CONTROL SPECIFICATION.
- CONTRACTOR TO SCHEDULE TRAFFIC CONTROL MEETING WITH CONTRACT ADMINISTRATOR & CITY TRAFFIC SERVICES 48 HOURS IN ADVANCE OF COMMENCING SET UP.

**METRIC**

WHOLE NUMBERS INDICATE MILLIMETRES  
DECIMALIZED NUMBERS INDICATE METRES

**WARNING**

- IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:
1. NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
  2. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.
  3. OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION.

**LEGEND**

- POLYPOSTS
- LANE CLOSURE
- CONSTRUCTION ZONE
- PEDESTRIAN CORRIDOR
- OFF PEAK CLOSURE

**LOCATION APPROVED UNDERGROUND STRUCTURES**

SUPV. U/G STRUCTURES COMMITTEE	DATE

**NOTE:**  
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

NO.	REVISIONS	DATE	BY
2	ISSUED FOR TENDER	16.05.02	
1	ISSUED FOR 100% REVIEW	16.03.15	
0	ISSUED FOR 60% REVIEW	16.02.05	

**Stantec**  
500 - 311 Portage Avenue, Winnipeg MB Canada  
www.stantec.com

DESIGNED BY: D.L.	CHECKED BY: D.J.M.
DRAWN BY: G.P.	APPROVED BY: S.B.C.
HOR. SCALE: 1:750	RELEASED FOR CONSTRUCTION: DATE
VERTICAL: DATE 2016.02.02	DATE

ENGINEER'S SEAL  
CONSULTANT DRAWING NO. C105

**Winnipeg**  
THE CITY OF WINNIPEG  
PUBLIC WORKS DEPARTMENT  
ENGINEERING DIVISION

**2016 REGIONAL STREET PROGRAM**  
ACADEMY ROAD  
RENFREW STREET TO CAMPBELL STREET  
TRAFFIC CONTROL / STAGING

SHEET 8 OF 11
CAD FILE DRAWING NUMBER 06860c-105-xxx.dwg
CITY DRAWING NUMBER P-3477-3

**APEGM**  
Certificate of Authorization  
Stantec Consulting Ltd.  
No. 1301