ISABEL STREET

PACIFIC AVE

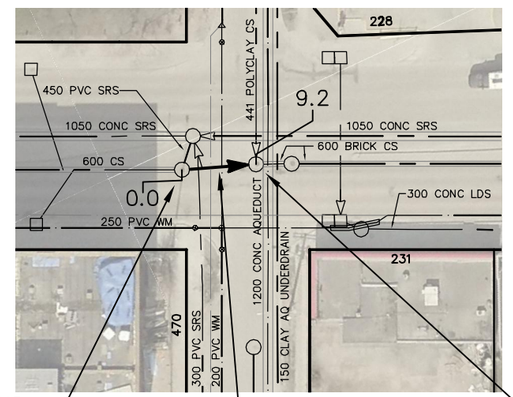

S-MH70032815
RIM 231.92
WEIR 227.26
INV N 226.86
INV S 226.86
INV NW 226.33

S-MH20016873
RIM 231.83
INV N 227.10
INV S 226.77
INV W 226.14

9.2 OF 600 CS TO BE LINED
S-MA70069623
(PARTIALLY DETERIORATED)

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION		
SEWER ID S-MA70069623		
DISTANCE FROM MH ID S-MH70032815		
DISTANCE	DIAMETER	CLOCK
**** NO SERVICE JUNCTIONS ****		

FOR INDEX SEE
11465

0.0 10.0 20.0 30.0 40.0

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	AD	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	
VERTICAL			K. ZURIK
DATE	2017 02 16	DATE	2017 02 15

PLOT DATE: 2017 02 16

ENGINEER'S SEAL

ORIGINAL SIGNED BY S.R.J. COURNOYER 17/02/10

CONSULTANT DRAWING NUMBER
–

BID OPPORTUNITY: 71-2017
CONTRACT NUMBER: 4

Winnipeg

THE CITY OF WINNIPEG

WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2016 SEWER MAIN RENEWALS
BY CIPP LINING

ISABEL STREET

MH AT PACIFIC AVENUE S (℄) TO
MH AT PACIFIC AVENUE (℄)

SHEET 35 OF 80

CITY DRAWING NUMBER
11500

FILE PATH: R:\DRAWINGS\SEWER\2016 RENEWALS\Contract 4\Construction Dwg\New folder\corrections\
FILE NAME: 11500.dwg