TUNIS BAY

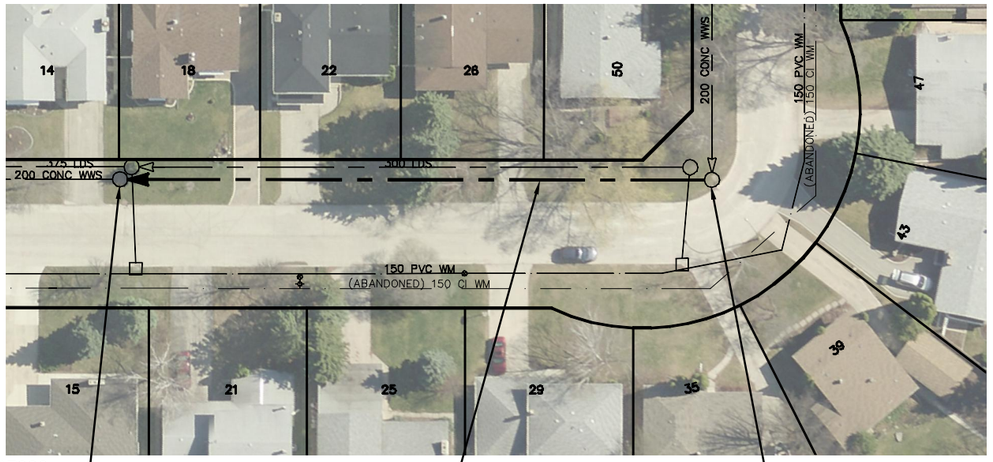

S–MH60017282
RIM 232.29
INV S 229.37
INV N 229.37

73.10 OF 200 CONC WWS
TO BE LINED S–MA60019882
(PARTIALLY DETERIORATED)

S–MH60017309
RIM 232.10
INV E 229.81
INV N 229.81

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION		
SEWER ID S–MA60019882		
DISTANCE FROM MH ID S–MH60017309		
DISTANCE	DIAMETER	CLOCK
9.8	150	10
11.3	150	10
11.9	150	1
30.2	150	3
30.5	150	9
47.2	150	11
48.8	150	2
64.5	150	1
65.4	150	11

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

CONSTRUCTION COMPLETION DATE: YYYY MM DD

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	MA	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	
VERTICAL			
DATE	2014 10 09	DATE	

PLOT DATE: 2014 10 09

ENGINEER'S SEAL

ORIGINAL SIGNED BY S.R.J. COURNOYER 14–10–07

CONSULTANT DRAWING NUMBER
–

BID OPPORTUNITY: 946–2014
CONTRACT NUMBER: 12

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2014 SEWER RENEWALS
BY CIPP LINING – CONTRACT 12

TUNIS BAY

MH ⊙ TUNIS BAY (SLEG) TO
1ST MH S OF SILVERSTONE AVENUE

SHEET 62 OF 66

CITY DRAWING NUMBER
10873

FILE PATH: R:\DRAWINGS\SEWER\2014 RENEWALS\CIPP'S\CONTRACT 12\Drawings\
FILE NAME: 10873.dwg