VALOUR ROAD

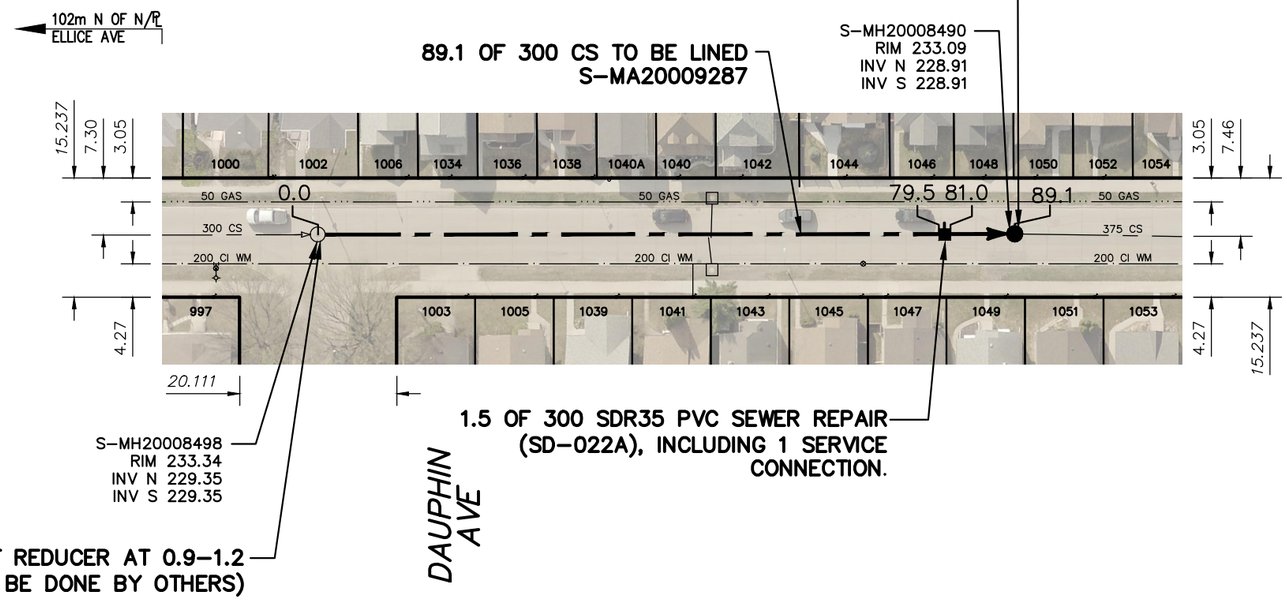

SEWER JUNCTION INFORMATION FROM SEWER VIDEO INSPECTION SEWER ID S-MA20009287		
DISTANCE FROM MH ID S-MH20008498		
DISTANCE	DIAMETER	CLOCK
12.4	150	10
19.4	150	2
19.6	150	2
20.0	150	10
28.0	150	10
30.4	150	2
35.7	150	10
40.9	150	2
41.9	150	10
48.7	150	10
50.1	150	2
51.7	150	10
52.3	150	2
54.7	150	10
59.6	150	1
66.0	150	10
71.2	150	2
80.2	150	10
87.4	150	10

WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.

2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.

SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

FOR INDEX SEE 11988

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

0.0 10.0 20.0 30.0 40.0

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE — DATE

NOTE:

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.
ELEV.

NO.	REVISIONS	DATE	BY

DESIGNED BY	SC	CHECKED BY	SC
DRAWN BY	AJ	APPROVED BY	KZ
SCALE: HORIZONTAL	1:750	RELEASED FOR CONSTRUCTION	K.ZUREK
VERTICAL			
DATE	2019 01 24	DATE	2019-01-23

PLOT DATE: 2019 01 24

ENGINEER'S SEAL
ORIGINAL SIGNED BY S.R.J. COURNOYER 19/01/22

CONSULTANT DRAWING NUMBER
-

BID OPPORTUNITY: 58-2019
CONTRACT NUMBER: 4

Winnipeg

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2018 SEWER MAIN RENEWALS BY AUGMENTATION
VALOUR ROAD
1ST MH N OF ELLICE AVENUE TO 2ND MH N OF DAUPHIN AVENUE

SHEET 48 OF 52

CITY DRAWING NUMBER
12033

FILE PATH: R:\DRAWINGS\SEWER\2018 RENEWALS\RENEWALS & ASSOCIATED WORKS\CONTRACT 4\CONSTRUCTION DWGS\
FILE NAME: VALOUR ROAD.dwg